

Click [here](#) to ask about the production status of specific part numbers.

MAX77975/MAX77976 Evaluation Kits

Evaluates: MAX77975/MAX77976/
MAX77958

General Description

The MAX77975/MAX77976 evaluation kit (EV kit) is a fully assembled and tested printed circuit board (PCB) that demonstrates the MAX77975/MAX77976 single-cell lithium-ion battery charger.

The MAX77975/MAX77976 is for 1S Li+ battery applications and can operate with a 3.8V to 19V input voltage with a maximum charging current of 3.5/5.5A. The MAX77975/MAX77976 offers a reverse boost as well as fully integrated low power loss switches to provide small solution size and high efficiency. The EV kit demonstrates the performance of the MAX77975/MAX77976 charger and provides the convenience of evaluating full USB Type-C® PD solutions with the MAX77958 USB Type-C PD controller. This combination allows fast charging of the battery through the USB Type-C port as well as reverse powering the USB Type-C port with battery OTG mode.

A Micro-B USB cable is included in the package to serve as the interface from a USB port on a Windows PC to the slave I²C port on MAX77975/MAX77976. Windows®-based graphical user interface (GUI) software provides a user-friendly interface to exercise the features of the MAX77975/MAX77976.

Benefits and Features

- High-Efficiency Single-Cell Switching Charger
 - Up to 5.5A Charging with MAX77976
 - 91.2% Buck Efficiency at 4A, 12V Input
- +28V Absolute Maximum Input Voltage Rating
- 3.8V to 19V Input Operating Voltage Range
- Reverse Boost with Programmable Output Voltage Options Up to 12V
- Charge Status Output for LED
- Push-Button Input for Exiting from Ship Mode
- External Discharge FET Enable Output
- Dedicated Input for Suspend Mode (SUSPND)
- USB Type-C Standalone Controller Support Customizable Firmware
- USB Type-C Version 1.3 and PD 3.0 Compliant
- Sink/Source/DRP Port Support
- PPS Sink Support
- Fast Role Swap Initial Sink Support
- Integrated V_{CONN} Switch with OCP
- Support Try.Sink
- Support BC1.2 Legacy Charger Detection

Ordering Information appears at end of data sheet.

USB Type-C® is a registered trademark of USB Implementers Forum.

Windows is a registered trademark and registered service mark of Microsoft Corporation.

MAX77975/MAX77976 Evaluation Kits

Evaluates: MAX77975/MAX77976/ MAX77958

Quick Start

Follow this procedure to familiarize yourself with the EV kit.

Note: In the following sections, software-related items are identified by bolding. Text in **bold** refers to items directly from the EV kit software. Text in **bold and underlined** refers to items from the Windows operating system.

Required Equipment

- MAX77975/MAX77976 evaluation package
 - MAX77975/MAX77976EVKIT# Board
 - USB Micro-B cable
 - MAX77975/MAX77976 EV kit software (GUI)
- USB Type-C or PD travel adaptor (TA)
- Power supply
- Battery simulator
- Multi-meters
- Windows-based PC
- Oscilloscope to monitor CC pin or other signals

Procedure

The EV kits are fully assembled and tested. Follow the steps below to install the EV kit software, make required hardware connections, and start operation of the kits. The EV kit software can be run without attached hardware. Note that after communication is established, the IC must still be configured correctly for the desired operation mode. Make sure the PC is connected to the internet throughout the process so that the USB driver can be automatically installed.

- 1) Visit www.maximintegrated.com/products/MAX77975_MAX77976 under the *Design Resources* tab to download the latest version of the MAX77975/MAX77976 EV kit GUI software. Save the software to a temporary folder and unpack the zip file.
- 2) Install the EV kit software on your computer by running the **MAX77975_MAX77976GUISetupX.X.X.exe** program inside the temporary folder. The program files are copied, and icons are created in the Windows **Start** menu. The software requires the .NET Framework 4.5 or later. If you are connected to the Internet,

Windows automatically updates the .NET framework as needed.

- 3) The EV kit software launches automatically after installation, or it can be launched by clicking on its icon in the Windows **Start** menu.
- 4) Make jumper connections based on the default connection options in [Table 1](#). Change it later when evaluating more features. For the SW1 on the EV kit, set the switch location to the RIGHT so that the MAX77975/MAX77976 I²C lines are connected directly to the MAXUSB communication interface. Later you can switch it to the LEFT so that the MAX77975/MAX77976 I²C lines are connected to MAX77958 I²C master.
- 5) Make connections to the EV kit board following guidance as shown in [Figure 1](#). The two main inputs to apply are the battery and the charging adaptor. For quick start evaluation, it is suggested to use a 5V power supply at the CHGIN input and a battery voltage greater than 3.6V at the BATT input. The optional voltmeter and ammeter location for testing charger efficiency is indicated in [Figure 1](#). When set up properly with both CHGIN = 5V and BATT = 3.8V input, the SYS voltage is regulated above VBATT by default.
- 6) Connect the EV kit to a USB port on the PC using a USB Micro-B cable.
- 7) Open the GUI software, click **Device > Connect**. A window pops up showing that a slave address corresponding to MAX77975/MAX77976 and/or MAX77958 has been found. If not, check the connection.
- 8) Start evaluating the part with the GUI software. Unlock the write protection and adjust the charger mode, the charging input current limit, and the charging current to start evaluating the basic charger features as described in the [Configurations 0-13 Tabs](#) section. Play with the charger mode and other register settings to evaluate the smart power path and more features. Remove the CHGIN input and use the real travel adaptor to evaluate charging the battery through the USB Type-C port.

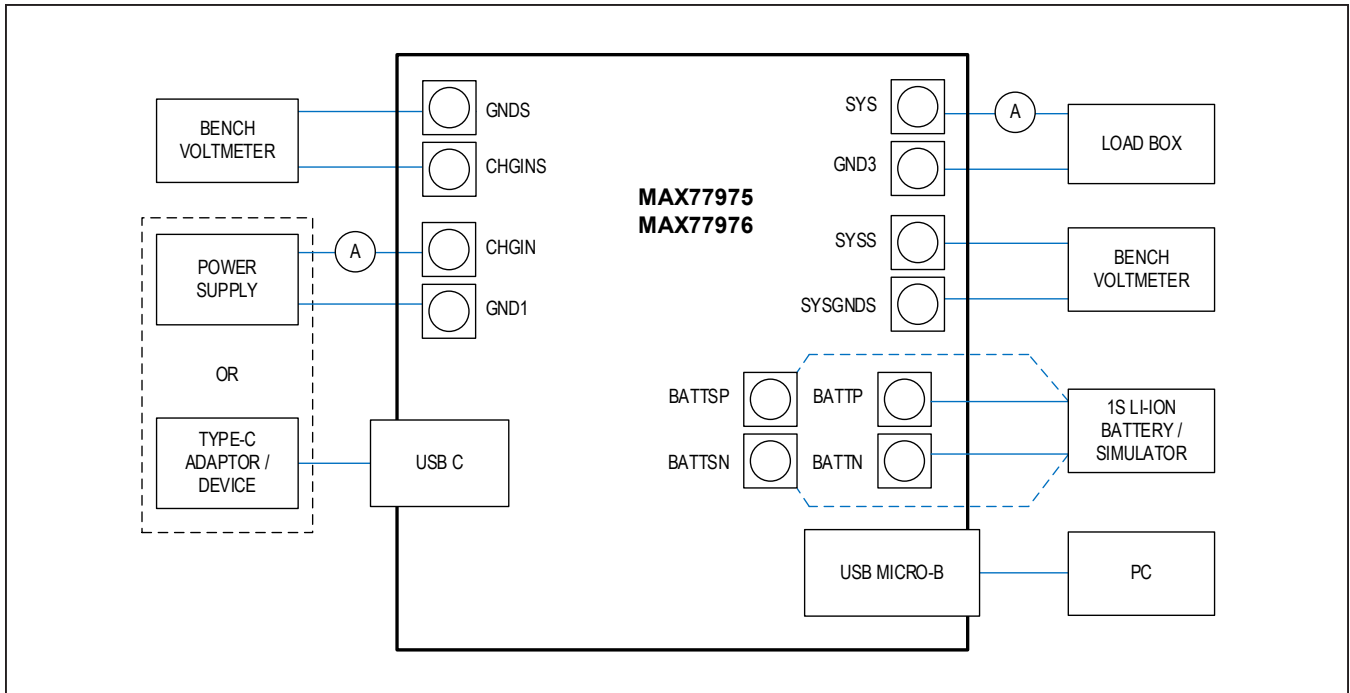


Figure 1. MAX77975/MAX77976 EV Kit Board Connections. The power supply and the USB Type-C adaptor can NOT be applied at the same time.

Table 1. Jumper Connection and Switch Setting Guide

| JUMPER | DEFAULT CONNECTION | FEATURE |
|--------|--------------------|---|
| J20 | Open | Open: No additional capacitor added on SYS. Bridge N jumpers (N can be 1, 2, 3, 4): Add N x 100µF capacitor on SYS. |
| J21 | Closed | Open: Disconnect BATTSP from BATTN. Allows BATTSP pin to remote sense at battery positive terminal. Closed: BATTSP sense point is directly at BATTN input terminal on the EV kit. |
| J22 | Closed | Open: Disconnect BATTSN from BATTN. Allows BATTSN pin to remote sense at battery negative terminal. Closed: BATTSN sense point is directly at BATTN input terminal on the EV kit. |
| J23 | Open | Open: Disable external BATT to SYS FET circuit. Closed: Enable the external BATT to SYS FET path to further reduce the BATT to SYS on resistance. Need to connect J18 and J29. |
| J36 | Open | Open: No additional capacitor added on BATT. Closed: 220µF capacitor added on BATT. |

Table 1. Jumper Connection and Switch Setting Guide (continued)

| JUMPER | DEFAULT CONNECTION | FEATURE |
|--------|--|---|
| J5 | 1-2 (ROOM): Closed 3-4 (NTC): Open 5-6 (POT): Open 7-8 (ENTH): Closed | All Open: Disable thermistor. Only 7-8 Closed: Enable thermistor function, connect pin 1 to the thermistor from the battery pack to measure temperature directly at the battery. 1-2, 7-8 Closed: Enable thermistor function, a fixed 10kΩ pullup and pulldown simulate a constant room temperature. 3-4, 7-8 Closed: Enable thermistor with temperature measurement from an NTC resistor installed on EV kit. 5-6, 7-8 Closed: Enable thermistor with temperature measurement simulated with a potentiometer R43. Any other configuration: Do not configure. |
| J18 | Open | Open: Disable external BATT to SYS FET circuit. Close: Connect 100kΩ pullup for the external BATT to SYS FET circuit. Need to connect J23 and J29. |
| J29 | Open | Open: Disable external BATT to SYS FET circuit. Close: Connect QBEXT pin to control external BATT to SYS FET circuit. Need to connect J23 and J18. |
| J37 | Open | Open: Default operation. Closed: Force disconnect QBATT. |
| J13 | Open | Open: Default operation. Closed: Force SUSPEND = 1 to the charger. |
| J17 | Open | Open: STAT pin LED indicator is disabled. Closed: STAT pin LED indicator is enabled. |
| J7 | 2-3 | Open: Do not configure. 1-2: VIO powered through EXT VIO with 1.8V external power supply. 2-3: VIO powered by USB Micro-B port connected to PC. |
| J9 | Closed | Open: MAX77958 V _{CONN} is not powered. Closed: MAX77958 V_{CONN} is powered by SYS. |
| J3 | Closed | Open: MAX77958 is not connected to VBUS. Closed: MAX77958 is connected to VBUS. |
| J16 | Closed | Open: MAX77958 is not powered by SYS. Closed: MAX77958 is powered by SYS. |
| J4 | Open | Open: MAX77958 GPIO4 is not connected to MAX77975/MAX77976 IRQB. Closed: MAX77958 GPIO4 is connected to MAX77975/MAX77976 IRQB. Also, connect 1-2 on J15 for pullup. |
| J15 | Open | Open: MAX77975/6 IRQB is not connected. Close 1-2: MAX77975/6 connects to 100kΩ pullup to VIO Close 3-4: IRQB LED indicator is enabled . |
| J30 | Open | Open: MAX77958 slave address configured by J31, J32. Closed: MAX77958 slave address is selected to be 0b0100110. Do not connect J31, J32. |

Table 1. Jumper Connection and Switch Setting Guide (continued)

| JUMPER | DEFAULT CONNECTION | FEATURE |
|--------|--------------------|---|
| J31 | Open | Open: MAX77958 slave address configured by J30, J32. Closed: MAX77958 slave address is selected to be 0b0100111. Do not connect J30, J32. |
| J32 | Closed | Open: MAX77958 slave address configured by J30, J31. Closed: MAX77958 slave address is selected to 0b0100101 by connecting the GPIO6 to GND. Default for GUI communication. Do not connect J30, J31. |
| J33 | Open | All MAX77958 GPIO pins at J33 are available to connect externally. Some GPIOs have reserved functionality. Refer to the MAX77958 data sheet for details. |
| J34 | Closed | Open: MAX77958 VIO1 is not powered. Closed: MAX77958 VIO1 is powered. |
| J35 | Closed | Open: MAX77958 VIO2 is not powered. Closed: MAX77958 VIO2 is powered. |
| J8 | Open | Open: CC1 line is not connected to pullup or pulldown. Must open J8 for testing with real USB Type-C adaptor. Close 1-2: CC1 is connected to RP to simulate a DFP has been connected to CC1. Close 3-4: CC1 is connected to RD to simulate a UFP has been connected to CC1. J11 must be installed. |
| J10 | Open | Open: CC2 line is not connected to pullup or pulldown. Must open J8 for testing with real USB Type-C adaptor. Close 1-2: CC2 is connected to RP to simulate a DFP has been connected to CC2. Close 3-4: CC2 is connected to RD to simulate a UFP has been connected to CC2. J11 must be installed. |
| J12 | Open | Open: CC1 line is not connected to RA. Must open J8 for testing with real USB Type-C adaptor. Close 1-2: CC1 is connected to RA to simulate a cable when RA is connected. J11 must be installed. |
| J14 | Open | Open: CC2 line is not connected to RA. Must open J8 for testing with real USB Type-C adaptor. Close 1-2: CC2 is connected to RA to simulate a cable when RA is connected. J11 must be installed. |
| J11 | Closed | Open: On-board RA and RD are not allowed. Closed: On-board RA and RD are allowed. |
| SW1 | 1-2 | 1-2: MAX77975/MAX77976 I²C lines are connected to the host directly. 2-3: MAX77975/MAX77976 I ² C lines are connected to the MAX77958 I ² C master. |

Default Options are in **Bold**

Detailed Description of Hardware

The GUI allows for quick, easy, and thorough evaluation of the MAX77975/MAX77976 and MAX77958. Every control in the GUI corresponds to a register in the MAX77975/MAX77976 and MAX77958. Refer to the *Register Map* section in the *MAX77975/MAX77976* and *MAX77958* data sheets for a complete description.

Software Installation

The MAX77976EVKIT# GUI can be downloaded from Maxim's website at <http://www.maximintegrated.com/products/MAX77976> (under the *Design Resources* tab). Save the EV kit software to a temporary folder and decompress the ZIP file. Run the .EXE file and follow the on-screen instructions to complete the installation.

Windows Driver

After connecting the Micro-USB cable between your PC and the EV kit for the first time, wait for Windows to automatically install the drivers for the USB to I2C Interface.

Establish Communication

When the device is powered up by CHGIN or BATT input, click **Device > Connect** to communicate to the IC. [Figure 2](#) shows the correct detection result. Click **Read and Close** to establish the connection.

Before configuring at any tab, click **Read Once** to make sure all the displayed configurations are in sync with the IC configuration state. Alternatively, click **Start Auto Read** and set corresponding read frequency to keep this page up to date at all times. Follow the guidance on the *MAX77975/MAX77976* IC data sheet for the detailed usage of each register. When trying to write to a register with the write button, disable the Auto Read feature.

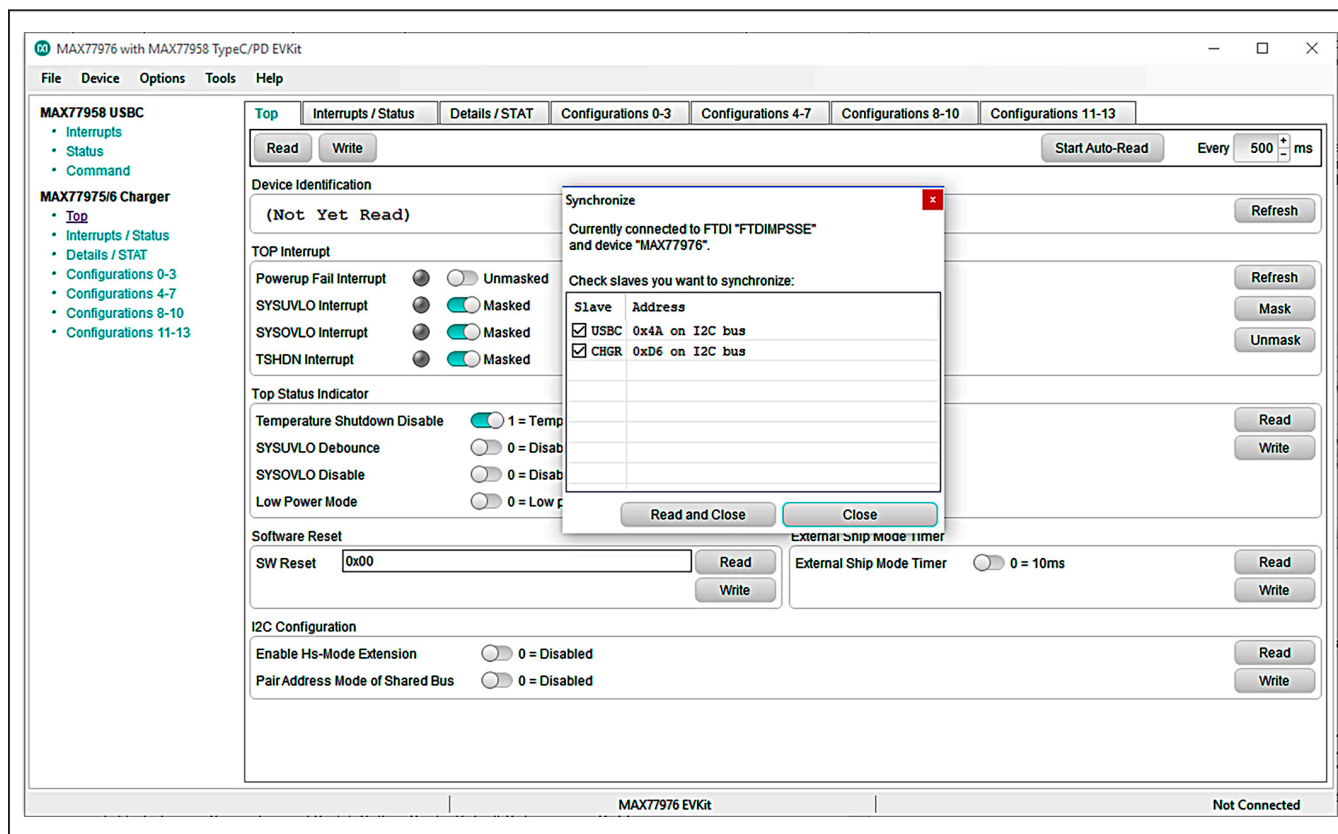


Figure 2. Device > Connect Resulting Window

Top Tab

The **Top** tab displays the top-level configuration settings for the IC. [Figure 3](#) shows the format of the **Top** tab. Information is grouped by function and each is detailed separately. The masked top interrupt is not reflected on the IRQB pin, while the unmasked interrupt is reflected on the IRQB pin. The *Top Status Indicator* section includes controls for the top-level settings. The software reset command is 0xA5.

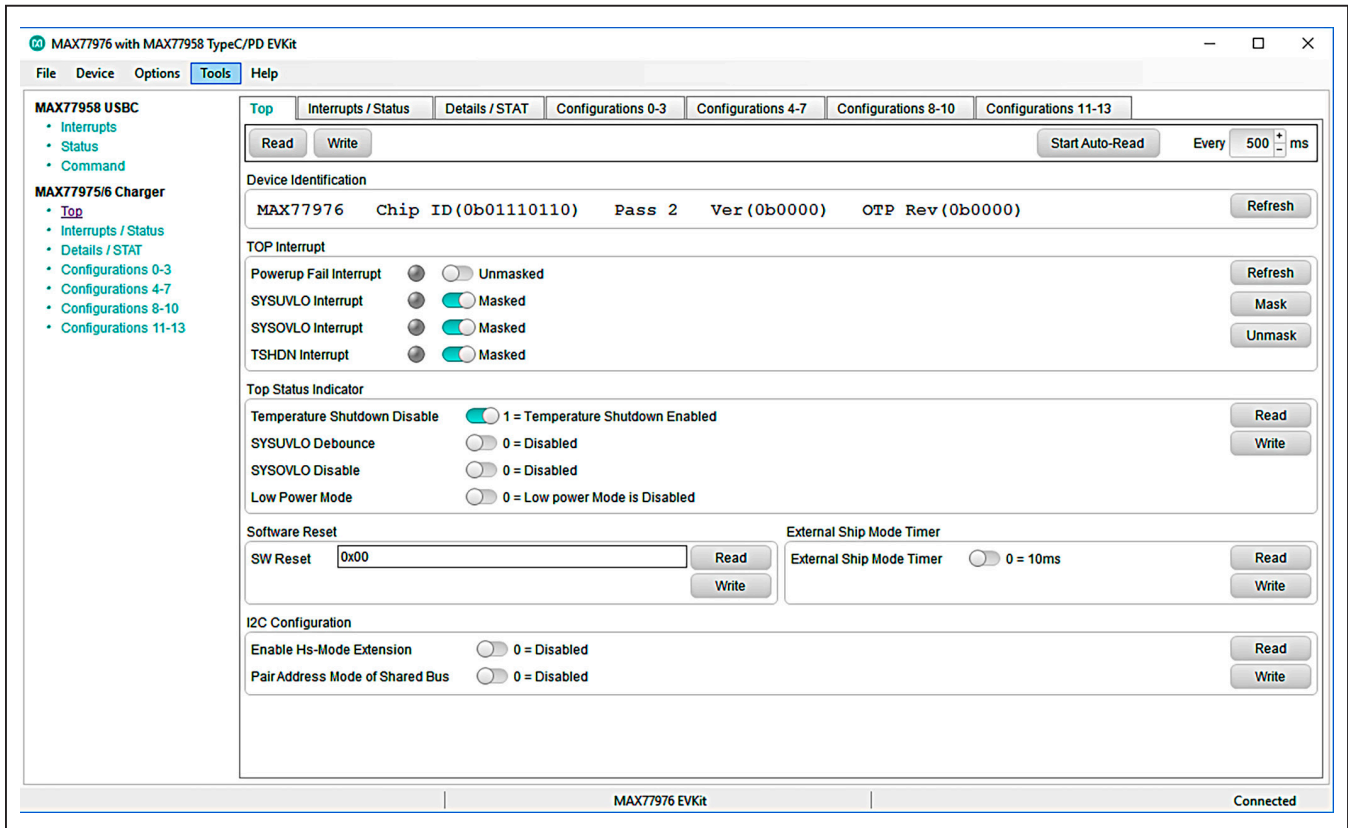


Figure 3. MAX77975/MAX77976 Top Tab

Interrupts/Status Tab

The **Interrupts/Status** tab displays the charger interrupt setting and status for the IC. [Figure 4](#) shows the format of the **Interrupts/Status** tab. The masked charger interrupt is not reflected on the IRQB pin, while the unmasked interrupt is reflected on the IRQB pin.

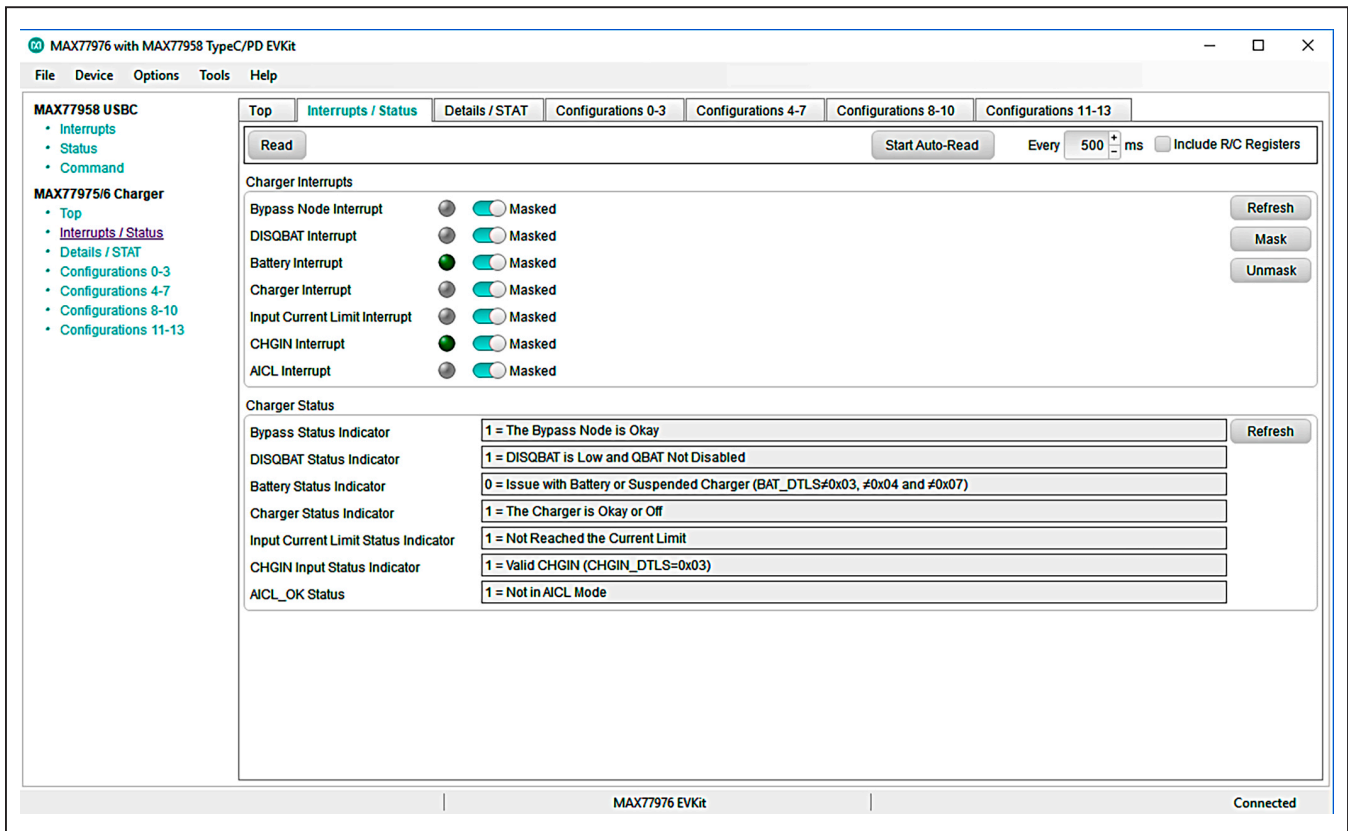


Figure 4. MAX77975/MAX77976 Interrupt and Status

Details/STAT Tab

The **Details/STAT** tab displays the charger detailed status. [Figure 5](#) shows the format of the **Details/STAT** tab. The detailed status of the charger helps diagnose the state of the charger operation. Also, the detailed charger status is the basis of the interrupt status. Refer to the description of the CHG_DTLS00/01/02 register in the data sheet for more details. The tab also controls the STAT LED behavior.

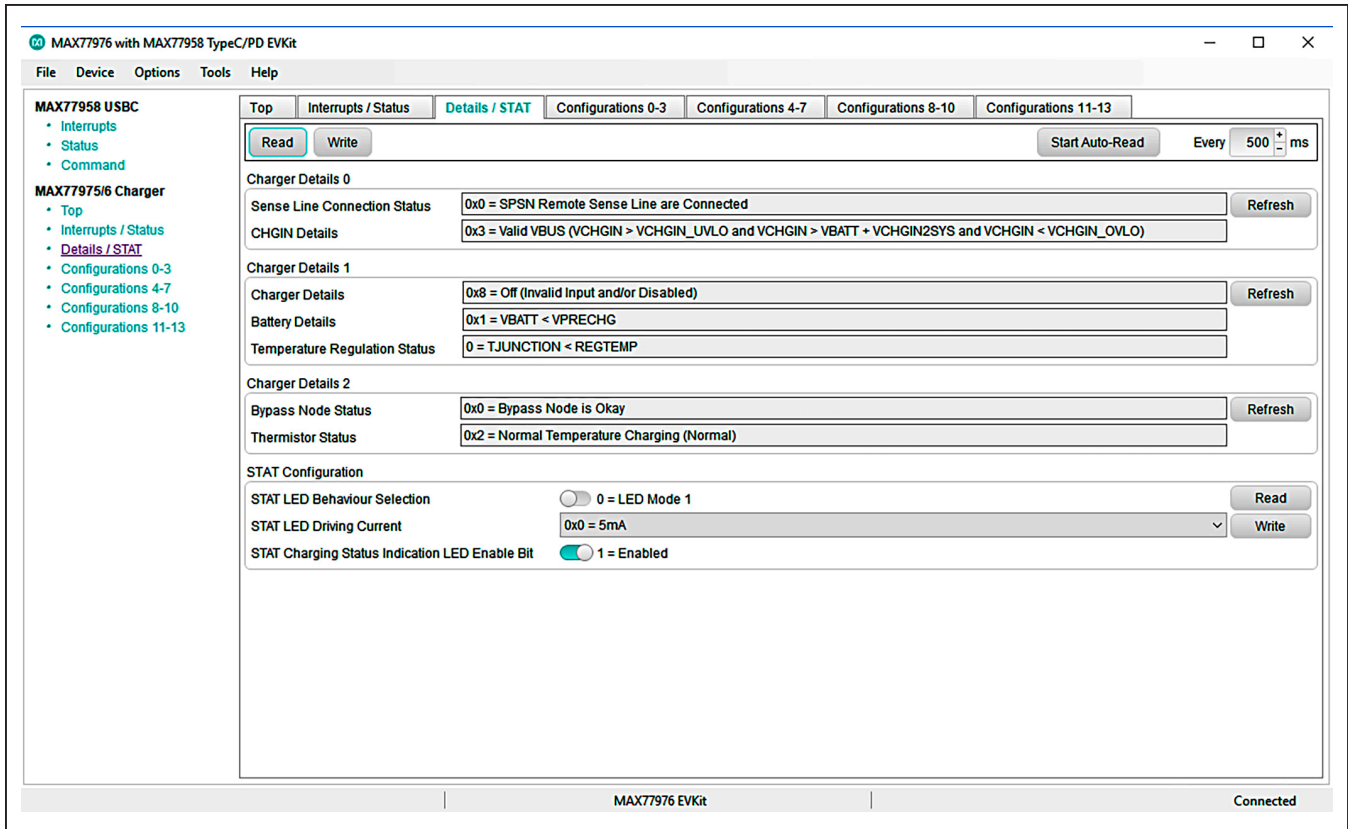


Figure 5. MAX77975/MAX77976 Details and STAT

Configurations 0-13 Tabs

The **Configurations 0-13 tabs** display the charger configuration settings corresponding to registers CHG_CFG_00-13. [Figure 6](#) shows the format of the **Configurations 0-3** tab as an example. Notice that the Configuration 1, 2, 3, 4, and 7 registers are locked by register Configuration 6. To unlock, set the **Charger Settings Protection** field of Configuration 6 to **Unlock 0x3** state, then click the **Write** button. Click **Read** to make sure the change is in place. After the unlock, all configuration registers can be configured. To get started charging a battery with the desired current setting, set **Chgin Input Current Limit** in Configuration 9, then set **Fast Charging Current** in Configuration 2, then set **Mode = 5** in Configuration 0 to switch from buck-only mode to charging mode.

Test with MAX77958 and USB Type-C Port Interface

CC Detection Test

- 1) Connect a USB Type-C adapter to the EV kit and see whether the MAX77958 detects SINK and configures input current limit correctly.

- 2) Connect a USB Type-C cable from a Type-C dual-role port (source preferred) device to see whether the MAX77958 detects CC Pin State Machine Detection and configures input current limit correctly.

USB Power Delivery Test

- 1) Source capability request function test.
- 2) Connect USB power delivery AC adapter to the EV kit.
- 3) Use a volt-meter to monitor the voltage on VBUS.
- 4) Go to **Command > Get SrcCap(0x31)**, click on **Write** to execute the command, the MAX77958 sends this command over the CC pin to the TA, and the TA provides a list of available source capabilities.
- 5) Review the source capabilities and make a note of the desired PDO.
- 6) Go to **SrcCap Request (0x32)**, set the value of the PDO, and press the **Write** button to change the BUS voltage.

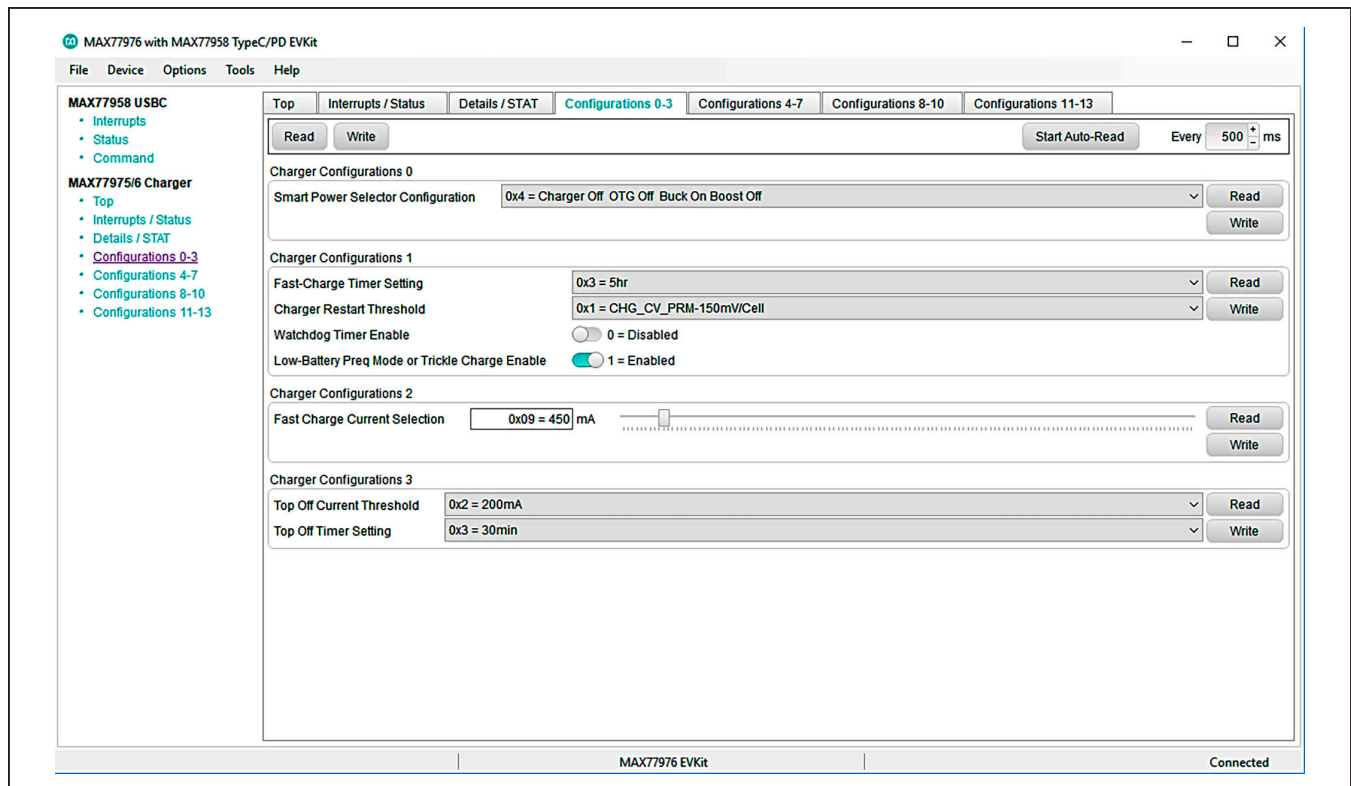


Figure 6. MAX77975/MAX77976 Configurations

BC1.2 Charger Type Detection

- 1) Plug in the USB Type-A to Type-C cable from a BC1.2 adapter or other legacy port, check the Charger Detection Status under the **BC Status** tab of the MAX77958 GUI, to see if the USB-C detects the correct charger type.

| CC Status | |
|--------------------------------------|--------------------------------|
| CC Pin State Machine Detection | 0x1 = SINK |
| VCONN Output | 0 = Disabled |
| CC Pin Detected Allowed VBUS Current | 0x1 = 500mA |
| Active CC Pin | 0x1 = CC1 Active |
| WTR Status | 0 = Dry |
| Charger Detection Abort Status | 0 = Charger Detection Run |
| VSAFE0V Status | 1 = VBUS > VSAFE0V |
| VCONNOSC Status | 0 = VCONN Current < VCONN_SC |
| VCONNOCIP Status | 0 = VCONN Current < VCONN_ILIM |

Figure 7. CC Status after Connecting the USB Type-C Connector of EV Kit to a Travel Adapter (TA).

| Get SrcCap (0x31) | |
|---------------------------|------------|
| Command Data | |
| Number of PDOs | 0x5 |
| Current Source Power Role | 0 |
| Current Source Data Role | 0 |
| PDO1 | 0x0801912C |
| PDO2 | 0x0002D12C |
| PDO3 | 0x0003C12C |
| PDO4 | 0x0004B12C |
| PDO5 | 0x000640E1 |
| PDO6 | 0x00000000 |
| PDO7 | 0x00000000 |
| PDO8 | 0x00000000 |

Figure 8. Get Source Capability (Get SrcCap) Under the Command Section

| BC Status | |
|----------------------------------|------------------|
| Charger Detection Status | 0x1 = SDP |
| DCD Timer Status | 0 = No Timeout |
| Special Charger Detection Status | 0x0 = Unknown |
| VBUS Detection Status | 1 = VBUS > VBDET |

Figure 9. BC Status after Connecting the USB Type-C Connector of EV Kit to SDP

MAX77975/MAX77976 Evaluation Kits

Evaluates: MAX77975/MAX77976/ MAX77958

Detailed Description of Firmware for MAX77958

The firmware of MAX77958 consists of two main parts: the core firmware and customization script.

The core firmware is compliant with the USB Type-C 1.3 and PD 3.0 specifications. The customization script is based on the application system, giving more flexibility for system design. It is based on the customization script update, which can achieve functions such as GPIO matrix control, charger configuration initialization, etc. Future USB Type-C and PD specification changes can be accommodated by updating the MAX77958 core firmware. See the [Core Firmware Update](#) section of this data sheet.

See the [MAX77958 Customization Script Block Update](#) section and the [MAX77958 Customization Script and OPCODE Command Guide](#) for details about the customization script.

MAX77958 Customization Script Block Update

The customization script defines the application-specific behavior of the MAX77958. An example is setting the input current limit of the charger when USB device detection is completed.

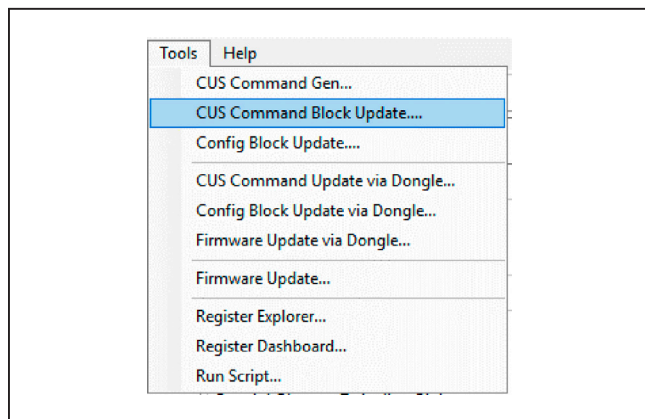


Figure 10. MAX77975/MAX77976 EV Kit GUI Customization Script Block Update

- 1) Follow the initial test setup to connect the GUI with the MAX77975/MAX77976 EV kit.
- 2) Connect 3.8V to BATT, do not disconnect the EV kit from the PC during the customization script block update.
- 3) Click on **Tools** in the menu bar and then go to **CUS Command Block Update**.
- 4) Click on the **Open** button in the pop-up window to load the latest customization script, and then click on **Start** to activate the customization script update.
- 5) [Figure 11](#) shows the customization script update process complete.

Core Firmware Update

- 1) Follow the initial test setup to connect the GUI with the MAX77975/MAX77976 EV kit.
- 2) Connect 3.8V to BATT and do not disconnect the EV kit from the PC during the firmware update.
- 3) Click on **Tools** in the menu bar and then go to **Firmware Update**.
- 4) Click on the **Open** button in the pop-up window to load the latest firmware. In the file select window, click on the **.bin** file, and then select **Start** to activate the firmware update.
- 5) [Figure 13](#) shows the firmware update process complete.

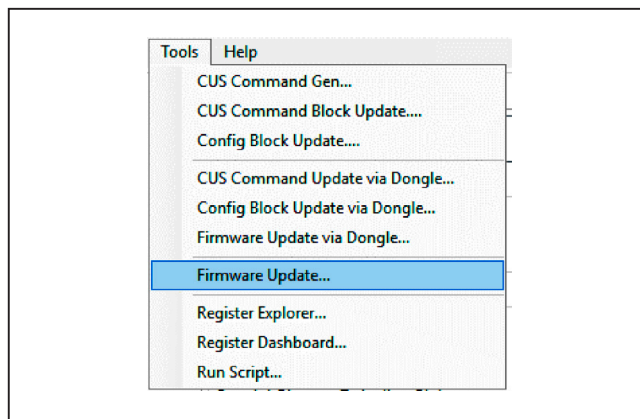


Figure 12. MAX77975/MAX77976 EV Kit GUI Firmware Update

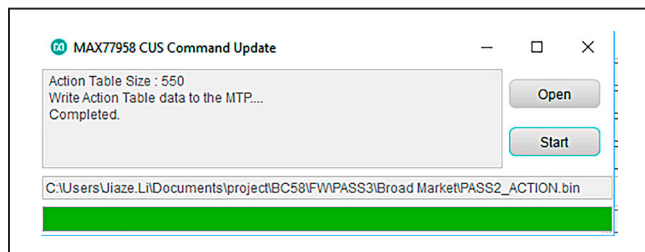


Figure 11. Customization Script Update Process Complete

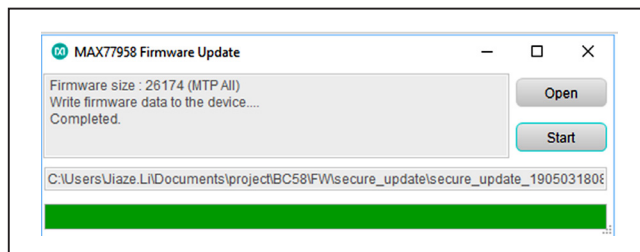


Figure 13. Firmware Update Process Complete

Script Automation

A Python-based script system is embedded in the GUI software to allow automating or configuring multiple registers sequentially with ease. To evaluate through Python-based commands, click **Tools > Run Script File**. A Script window pops up, as shown in [Figure 14](#). The first tab consists of a script editor and an embedded Python terminal interface. The second tab provides a Python I/O console. The help button provides a coding tutorial for this script window. Click the **Run** button to execute the script. The script feature helps with testing out a sequence of the configuration automatically.

Optional Tools

For I²C-communication debugging, more tools are available at **Options > CMOD Advanced UI**. With the proper test set-up procedure described in this document, these tools do not need to be used to evaluate the MAX77975/MAX77976. However, other slave devices can be tested with the I²C debugging tools and the GUI software when connected to the MAX77975/MAX77976 with the SDA and SCL pins. If successful, you can automate multiple slave devices through the script window.

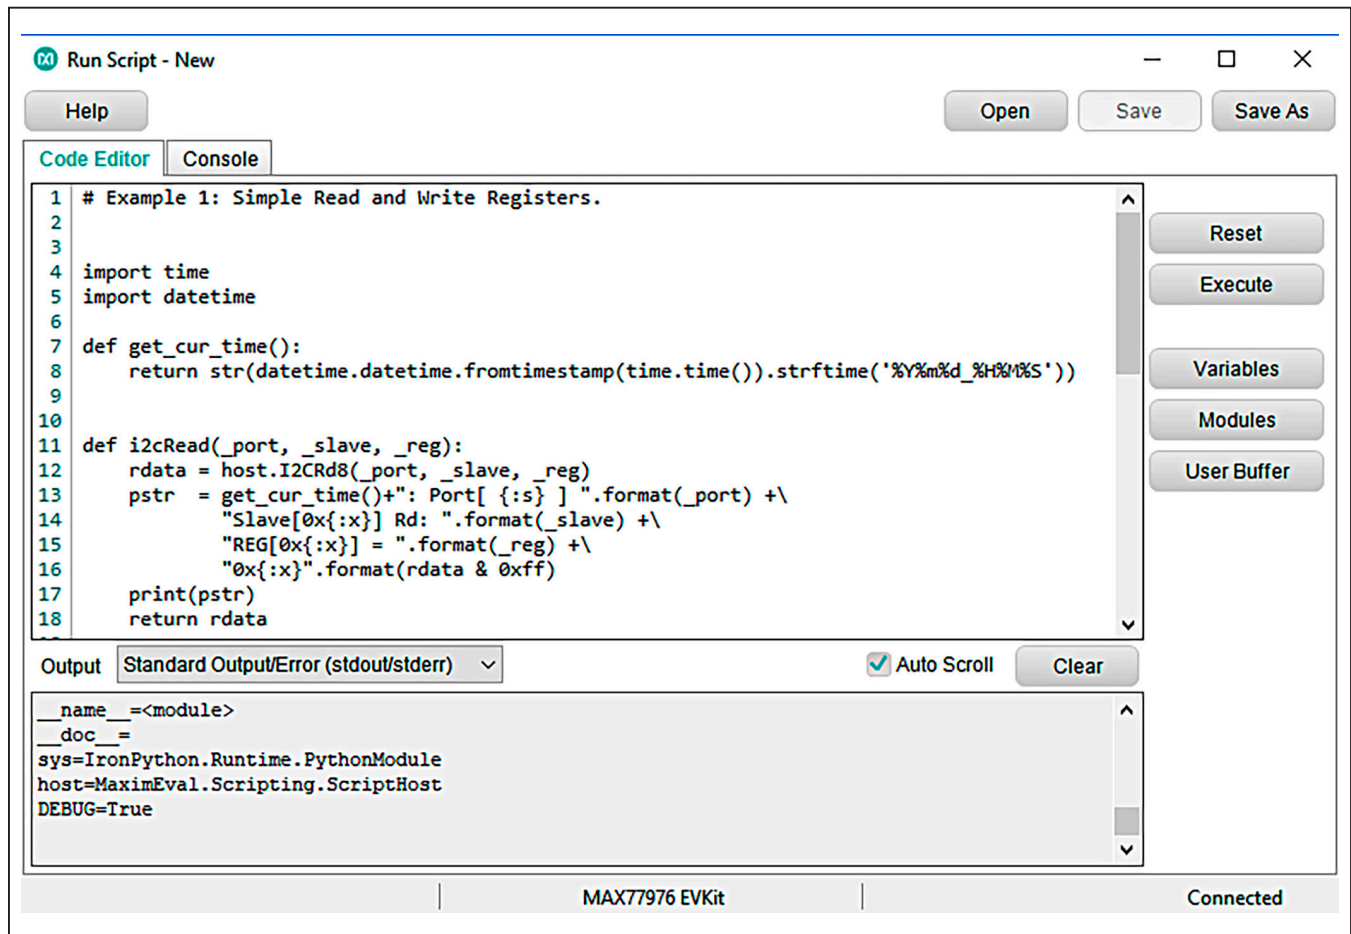


Figure 14. MAX77975/6 Script Window

Table 2. USB Acronyms

| ACRONYM | DESCRIPTION |
|---------|------------------------------------|
| BC1.2 | Battery Charging 1.2 |
| CC | Configuration Channel |
| CDP | Charging Downstream Port |
| DCP | Dedicated Charging Port |
| DFP | Downstream Facing Port |
| MAXUSB | USB to I ² C translator |
| MTP | Multiple Time Programmable |
| OVP | Over Voltage Protection |
| PD | Power Delivery |
| PDO | Power Data Object |
| PPS | Programmable Power Supply |
| SDP | Standard Downstream Port |
| UFP | Upstream Facing Port |
| VDM | Vendor Defined Message |

Ordering Information

| PART | EVALUATES | TYPE |
|----------------|--------------------|--------|
| MAX77975EVKIT# | MAX77975, MAX77958 | EV Kit |
| MAX77976EVKIT# | MAX77976, MAX77958 | EV Kit |

#Denotes RoHS compliant.

MAX77975/MAX77976
Evaluation Kits

Evaluates: MAX77975/MAX77976/
MAX77958

MAX77975 EV Kit Bill of Materials

| ITEM | REF_DES | DN/DNP | QTY | MFG PART # | MANUFACTURER | VALUE | DESCRIPTION |
|------|---|--------|-----|--|--|----------|--|
| 1 | AVL1, BATSN, BATSP, BATT5, BYPS, CC1, CC2, CHGINS, DN, DN1, DP, DP2, INTB1, SBU1, SBU2, SCL1, SDA1, SYS1, SYSS, VDD1P1, VDD1P8, VIO, VIO1, VIO2 | — | 24 | 5000 | KEystone | N/A | TEST POINT; PIN DIA = 0.1IN; TOTAL LENGTH = 0.3IN; BOARD HOLE = 0.04IN; RED; PHOSPHOR BRONZE WIRE SILVER PLATE FINISH; |
| 2 | BATTN, BATTN1, BATTTP, BATTTP1, BYP, CHGIN, GND1-GND5, GND7, SYS | — | 13 | 9020 BUSS | WEICO WIRE | MAXIMPAD | EVK KIT PARTS; MAXIM PAD; WIRE; NATURAL; SOLID; WEICO WIRE; SOFT DRAWN BUS TYPE-S; 20AWG |
| 3 | C1, C15, C18-C21, C23-C29, C36 | — | 14 | GRM155R71A104JA01 | MURATA | 0.1µF | CAPACITOR; SMT (0402); CERAMIC CHIP; 0.1µF; 10V; TOL = 5%; TG = -55°C TO +125°C; TC = X7R |
| 4 | C2 | — | 1 | C1608X5R1V225K080AC; GRM188R6YA225KA12 | TDK; MURATA | 2.2µF | CAPACITOR; SMT (0603); CERAMIC CHIP; 2.2µF; 35V; TOL = 10%; TG = -55°C TO +85°C; TC = X5R |
| 5 | C3, C4, C16, C17, C30-C32 | — | 7 | C0402C105K8PAC; CC0402KRX5R6BB105 | KEMET; YAGEO | 1µF | CAPACITOR; SMT (0402); CERAMIC CHIP; 1µF; 10V; TOL = 10%; TG = -55°C TO +85°C; TC = X5R |
| 6 | C5, C33, C50, C54, C55 | — | 5 | CL05A105K05NNN | SAMSUNG | 1µF | CAP; SMT (0402); 1µF; 10%; 16V; X5R; CERAMIC CHIP |
| 7 | C6, C10 | — | 2 | C2012X5R1V106K125AC | TDK | 10µF | CAPACITOR; SMT (0805); CERAMIC CHIP; 10µF; 35V; TOL = 10%; TG = -55°C TO +85°C; TC = X5R |
| 8 | C7 | — | 1 | CGA2B3X7R1H104K050BB; C1005X7R1H104K050BB; GRM155R71H104KE14; GCM155R71H104KE02; C1005X7R1H104K050BE; UMK105B7104KV-FR; CGA2B3X7R1H104K050BE | TDK;TDK; MURATA;MURATA; TDK;TAIYO YUDEN; TDK | 0.1µF | CAPACITOR; SMT (0402); CERAMIC CHIP; 0.1µF; 50V; TOL = 10%; TG = -55°C TO +125°C; TC = X7R |
| 9 | C8, C34 | — | 2 | CL10A226M07JZNC | SAMSUNG ELECTRONICS | 22µF | CAP; SMT (0603); 22µF; 20%; 16V; X5R; CERAMIC CHIP |
| 10 | C9 | — | 1 | GRM188R61C106MA73 | MURATA | 10µF | CAPACITOR; SMT (0603); CERAMIC CHIP; 10µF; 16V; TOL = 20%; MODEL = GRM SERIES; TG = -55°C TO +85°C; TC = X5R |
| 11 | C11, C14, C43, C44 | — | 4 | C0402C0G500270JNP; GRM1555C1H270JA01 | VENKEL LTD.; MURATA | 27PF | CAPACITOR; SMT; 0402; CERAMIC; 27pF; 50V; 5%; COG; -55°C to + 125°C; 0 ±30PPM/°C |
| 12 | C12, C13, C22 | — | 3 | ZRB15XR61A475ME01; CL05A475MP5NRN; GRM155R61A475MEAA; C1005X5R1A475M050BC | MURATA; SAMSUNG; MURATA;TDK | 4.7µF | CAPACITOR; SMT (0402); CERAMIC CHIP; 4.7µF; 10V; TOL = 20%; TG = -55°C TO +85°C; TC = X5R |
| 13 | C35 | — | 1 | C0402C103K5SRAC; GRM155R71H103KA88; C1005X7R1H103K050BE; CL05B103KB5NNN; UMK105B7103KV | KEMET; MURATA;TDK; SAMSUNG ELECTRONIC; TAIYO YUDEN | 0.01µF | CAPACITOR; SMT (0402); CERAMIC CHIP; 0.01µF; 50V; TOL = 10%; TG = -55°C TO +125°C; TC = X7R |
| 14 | C37-C40 | — | 4 | EMK325ABJ107MM | TAIYO YUDEN | 100µF | CAPACITOR; SMT (1210); CERAMIC CHIP; 100µF; 16V; TOL = 20%; TG = -55°C TO +85°C; TC = X5R |
| 15 | C41 | — | 1 | GRM32ER60J227ME05 | MURATA | 220µF | CAP; SMT (1210); 220µF; 20%; 6.3V; X5R; CERAMIC CHIP |
| 16 | C42 | DNI | 1 | EEE-FK1V101P | PANASONIC | 100µF | CAPACITOR; SMT (CASE_F); ALUMINUM-ELECTROLYTIC; 100µF; 35V; TOL = 20%; TG = -55°C TO +105°C; AUTO |
| 17 | C46 | — | 1 | GRM188R71A225KE15; CL10B225KP8NNN; C1608X7R1A225K080AC; C0603C225K8RAC | MURATA; SAMSUNG; TDK;KEMET | 2.2µF | CAPACITOR; SMT (0603); CERAMIC CHIP; 2.2µF; 10V; TOL = 10%; TG = -55°C TO +125°C; TC = X7R |
| 18 | C47, C51 | — | 2 | ANY | ANY | 1µF | CAPACITOR; SMT (0402); CERAMIC CHIP; 1µF; 6.3V; TOL = 10%; MODEL = ; TG = -55°C TO +85°C; TC = X5R; |

MAX77975/MAX77976
Evaluation Kits

Evaluates: MAX77975/MAX77976/
MAX77958

MAX77975 EV Kit Bill of Materials (continued)

| ITEM | REF_DES | DN/DNP | QTY | MFG PART # | MANUFACTURER | VALUE | DESCRIPTION |
|------|---|--------|-----|---------------------|-----------------------------|-----------------|--|
| 19 | C52 | — | 1 | C1005X5R1V105K050BC | TDK | 1µF | CAPACITOR; SMT (0402); CERAMIC CHIP; 1µF; 35V; TOL = 10%; TG = -55°C TO +85°C; TC = X5R |
| 20 | D1 | — | 1 | PTVS20VS1UR | NEXPERIA | 20V | DIODE; TVS; SMT (SOD-123W); VRM = 20V; IPP = 12.3A |
| 21 | D3 | — | 1 | SD2114S040S8R0 | AVX | SD2114S040S8R0 | DIODE; SCH; SMB (DO-214AA); PIV = 40V; IF = 8A |
| 22 | D8, D9 | — | 2 | PESD4V0W1BSF | NEXPERIA | 4V | EVKIT PART-DIODE; TVS; SMT (SOD962-2); VRM = ±4V; IPP = N/A |
| 23 | DISQBAT, EXTSM, IRQB, IRQB53, QBEXT, SCL, SDA, STAT, SUSPND | — | 9 | 5002 | KEYSTONE | N/A | TEST POINT; PIN DIA = 0.1IN; TOTAL LENGTH = 0.3IN; BOARD HOLE = 0.04IN; WHITE; PHOSPHOR BRONZE WIRE SILVER; |
| 24 | DS1-DS3 | — | 3 | LTST-C190CKT | LITE-ON ELECTRONICS INC. | LTST-C190CKT | DIODE; LED; STANDARD; RED; SMT (0603); PIV = 5.0V; IF = 0.04A; -55°C TO +85°C |
| 25 | EXTVIO, PVDD, VDD | — | 3 | 5010 | KEYSTONE | N/A | TEST POINT; PIN DIA = 0.125IN; TOTAL LENGTH = 0.445IN; BOARD HOLE = 0.063IN; RED; PHOSPHOR BRONZE WIRE SIL; |
| 26 | GNDS, PGND5, SYSGNDS | — | 3 | 5001 | KEYSTONE | N/A | TEST POINT; PIN DIA = 0.1IN; TOTAL LENGTH = 0.3IN; BOARD HOLE = 0.04IN; BLACK; PHOSPHOR BRONZE WIRE SILVER PLATE FINISH; |
| 27 | J1 | — | 1 | 10118193-0001LF | FCI CONNECT | 10118193-0001LF | CONNECTOR; FEMALE; SMT; MICRO USB B TYPE RECEPTACLE; RIGHT ANGLE; 5PINS |
| 28 | J2 | — | 1 | 12401832E402A | AMPHENOL | 12401832E402A | CONNECTOR; FEMALE; SMT; USB TYPE C CONNECTOR; RIGHT ANGLE; DUAL ROW; 24PINS |
| 29 | J3, J4, J9, J11, J12, J14, J16, J30-J32, J34, J35 | — | 12 | TSW-102-07-T-S | SAMTEC | TSW-102-07-T-S | CONNECTOR; THROUGH HOLE; TSW SERIES; SINGLE ROW; STRAIGHT; 2PINS; -55°C TO +105°C |
| 30 | J5, J20 | — | 2 | PBC04DAAN | SULLINS ELECTRONICS CORP. | PBC04DAAN | CONNECTOR; MALE; THROUGH HOLE; BREAKAWAY; STRAIGHT; 8PINS; -65°C TO +125°C |
| 31 | J7, J8, J10 | — | 3 | PEC03SAAN | SULLINS ELECTRONICS CORP. | PEC03SAAN | EVKIT PART-CONNECTOR; MALE; THROUGH HOLE; BREAKAWAY; STRAIGHT; 3PINS; -65°C TO +125°C; |
| 32 | J13, J17, J18, J21, J22, J29, J36, J37 | — | 8 | PBC02SAAN | SULLINS ELECTRONICS CORP. | PBC02SAAN | CONNECTOR; MALE; THROUGH HOLE; BREAKAWAY; STRAIGHT; 2PINS |
| 33 | J15, J23 | — | 2 | PBC02DAAN | SULLINS ELECTRONICS CORP. | PBC02DAAN | CONNECTOR; MALE; THROUGH HOLE; BREAKAWAY; STRAIGHT; 4PINS |
| 34 | J33 | — | 1 | PBC09SAAN | SULLINS ELECTRONICS CORP. | PBC09SAAN | CONNECTOR; MALE; THROUGH HOLE; BREAKAWAY; STRAIGHT; 9PINS; -65°C TO +125°C |
| 35 | L1 | — | 1 | IHLP2020BZER1R0M11 | VISHAY DALE | 1µH | INDUCTOR; SMT; IHLP SERIES; 1µH; TOL = ±20%; 7A; -55°C TO +125°C |
| 36 | L2-L4 | — | 3 | BLM18AG601SN1 | MURATA | 600 | INDUCTOR; SMT (0603); FERRITE-BEAD; 600; TOL = ±; 0.5A |
| 37 | MH1-MH4 | — | 4 | 9032 | KEYSTONE | 9032 | MACHINE FABRICATED; ROUND-THRU HOLE SPACER; NO THREAD; M3.5; 5/8IN; NYLON |
| 38 | MISC1 | — | 1 | AK67421-1-R | ASSMANN | AK67421-1-R | CONNECTOR; MALE; USB; USB2.0 MICRO CONNECTION CABLE; USB B MICRO MALE TO USB A MALE; STRAIGHT; 5PINS-4PINS |
| 39 | Q1, Q2 | — | 2 | AON6512 | ALPHA & OMEGA SEMICONDUCTOR | AON6512 | TRAN; N-CHANNEL ALPHAMOS; NCH; DFN8-EP; PD-(83W); I(150A); V-(30V) |
| 40 | R1, R7, R14-R16, R18, R22, R32-R34, R44 | — | 11 | ERJ-2GE0R00 | PANASONIC | 0 | RESISTOR; 0402; 0Ω; 0%; JUMPER; 0.10W; THICK FILM |

MAX77975/MAX77976
Evaluation Kits

Evaluates: MAX77975/MAX77976/
MAX77958

MAX77975 EV Kit Bill of Materials (continued)

| ITEM | REF_DES | DN/DNP | QTY | MFG PART # | MANUFACTURER | VALUE | DESCRIPTION |
|------|----------------------------|--------|-----|---|---|-------|--|
| 41 | R2, R42 | — | 2 | CRCW060310K0FK; ERJ-3EKF1002 | VISHAY DALE; PANASONIC | 10K | RESISTOR; 0603; 10K; 1%; 100PPM; 0.10W; THICK FILM |
| 42 | R4, R6 | — | 2 | ERJ-2RKF6493 | PANASONIC | 649K | RESISTOR; 0402; 649KΩ; 1%; 100PPM; 0.1W; THICK FILM |
| 43 | R5, R64 | — | 2 | ERJ-2RKF1203 | PANASONIC | 120K | RESISTOR; 0402; 120KΩ; 1%; 100PPM; 0.1W; THICK FILM |
| 44 | R8 | — | 1 | CRCW040212K0FK; MCR01MZPF1202 | VISHAY DALE; ROHM SEMICONDUCTOR | 12K | RESISTOR, 0402, 12KΩ, 1%, 100PPM, 0.0625W, THICK FILM |
| 45 | R9, R13 | — | 2 | ERJ-2RKF27R0X; RC0402FR-0727RL; CRCW040227R0FK | PANASONIC; YAGEO PHICOMP; VISHAY DALE | 27 | RESISTOR, 0402, 27Ω, 1%, 100PPM, 0.0625W, THICK FILM |
| 46 | R10 | — | 1 | CRCW04021M00FK | VISHAY DALE | 1M | RESISTOR; 0402; 1M; 1%; 100PPM; 0.0625W; THICK FILM |
| 47 | R11, R36, R37, R45 | — | 4 | CRCW04021K00FK; RC0402FR-071KL; MCR01MZPF1001 | VISHAY DALE; YAGEO PHICOMP; ROHM SEMI | 1K | RESISTOR; 0402; 1K; 1%; 100PPM; 0.0625W; THICK FILM |
| 48 | R12, R21 | — | 2 | CRCW04022K20JN | VISHAY DALE | 2.2K | RESISTOR; 0402; 2.2KΩ; 5%; 200PPM; 0.063W; METAL FILM |
| 49 | R17 | — | 1 | CRCW04024752FK; 9C04021A4752FLHF3; CRCW040247K5FK | VISHAY DALE; YAGEO; VISHAY DALE | 47.5K | RESISTOR; 0402; 47.5K; 1%; 100PPM; 0.0625W; THICK FILM |
| 50 | R19, R20, R23, R31, R41 | — | 5 | CRCW0402100KFK; RC0402FR-07100KL | VISHAY;YAGEO | 100K | RESISTOR; 0402; 100K; 1%; 100PPM; 0.0625W; THICK FILM |
| 51 | R24, R38 | — | 2 | CRCW040210R0FK; 9C04021A10R0FL | VISHAY DALE;YAGEO | 10 | RESISTOR; 0402; 10Ω; 1%; 100PPM; 0.0625W; THICK FILM |
| 52 | R25, R29 | — | 2 | ERJ-2RKF5602 | PANASONIC | 56K | RESISTOR, 0402, 56KΩ, 1%, 100PPM, 0.0625W, THICK FILM |
| 53 | R26, R48 | — | 2 | CRCW0402200KFK; RF73HIELTP2003 | VISHAY DALE; KOA SPEER ELECTRONICS | 200K | RESISTOR; 0402; 200K; 1%; 100PPM; 0.0625W; THICK FILM |
| 54 | R27, R28 | — | 2 | CRCW04024K70FK; MCR01MZPF4701 | VISHAY DALE; ROHM SEMICONDUCTOR | 4.7K | RESISTOR, 0402, 4.7KΩ, 1%, 100PPM, 0.0625W, THICK FILM |
| 55 | R30 | — | 1 | CRCW0402169KFK | VISHAY DALE | 169K | RESISTOR; 0402; 169KΩ; 1%; 100PPM; 0.063W; THICK FILM |
| 56 | R35 | — | 1 | CRCW0402470RFK | VISHAY DALE | 470 | RESISTOR, 0402, 470Ω, 1%, 100PPM, 0.0625W, THICK FILM |
| 57 | R39, R40 | — | 2 | CRCW04025K10FK | VISHAY DALE | 5.1K | RESISTOR; 0402; 5.1K; 1%; 100PPM; 0.0625W; THICK FILM |
| 58 | R43 | — | 1 | 3296Y-1-104LF | BOURNS | 100K | RESISTOR; THROUGH HOLE-RADIAL LEAD; 3296 SERIES; 100KΩ; 10%; 100PPM; 0.5W |
| 59 | R49, R50, R59, R60 | — | 4 | CRCW06030000Z0EAHP | VISHAY DRALORIC | 0 | RESISTOR; 0603; 0Ω; 0%; JUMPER; 0.25W; THICK FILM |
| 60 | R51, R52 | — | 2 | CRCW04021R00FK | VISHAY DALE | 1 | RESISTOR, 0402, 1Ω, 1%, 100PPM, 0.0625W, THICK FILM |

MAX77975/MAX77976
Evaluation Kits

Evaluates: MAX77975/MAX77976/
MAX77958

MAX77975 EV Kit Bill of Materials (continued)

| ITEM | REF_DES | DNI/DNP | QTY | MFG PART # | MANUFACTURER | VALUE | DESCRIPTION |
|--------------|----------|---------|------------|------------------------------------|---|---------------|---|
| 61 | R55, R57 | — | 2 | CRCW04022K20FK; RC0402FR-072K2L | VISHAY DALE; YAGEO PHICOMP | 2.2K | RESISTOR, 0402, 2.2KΩ, 1%, 100PPM, 0.0625W, THICK FILM |
| 62 | R66, R67 | — | 2 | CRCW0402330KFK | VISHAY DALE | 330K | RESISTOR, 0402, 330KΩ, 1%, 100PPM, 0.0625W, THICK FILM |
| 63 | RT1 | — | 1 | NTCG163JF103F | TDK | 10K | THERMISTOR; SMT (0603); THICK FILM (NICKEL PLATED); 10K; TOL = ±1% |
| 64 | SW1 | — | 1 | CL-SB-22C-02 | COPAL ELECTRONICS INC. | CL-SB-22C-02 | SWITCH; DPDT; THROUGH HOLE; 12V; 0.2A; ON-ON; RCOIL = 0.05Ω; RINSULATION = 10MΩ; COPAL ELECTRONICS INC.; -40°C TO +85°C |
| 65 | SW2 | — | 1 | EVQ-Q2K03W | PANASONIC | EVQ-Q2K03W | SWITCH; SPST; SMT; 15V; 0.02A; LIGHT TOUCH SWITCH; RCOIL = Ω; RINSULATION = Ω; PANASONIC |
| 66 | U1 | — | 1 | MAX77975 | MAXIM | MAX77975 | EVKIT PART - IC; MAX77975; 19V INPUT; 5.5A BUCK CHARGER FOR 1S L-ION BATTERY; PACK; PACKAGE OUTLINE DRAWING 21-100411; LAND PATTERN DRAWING: 90-100145; PACKAGE CODE: F234A4F-1 FCQFN32 |
| 67 | U2 | — | 1 | FT2232HL | FUTURE TECHNOLOGY DEVICES INTL LTD. | FT2232HL | IC; MMRY; DUAL HIGH SPEED USB TO MULTIPURPOSE UART/FIFO; LQFP64 |
| 68 | U3 | — | 1 | TCK402G | TOSHIBA | TCK402G | IC; ASW; CMOS LINEAR INTEGRATED CIRCUIT SILICON MONOLITHIC; WLCSP6 |
| 69 | U4 | — | 1 | MAX14611ETD+ | MAXIM | MAX14611ETD+ | IC; TRANS; QUAD BIDIRECTIONAL LOW-VOLTAGE LOGIC LEVEL TRANSLATOR; TDFN14-EP |
| 70 | U5, U6 | — | 2 | MAX8512EXK+ | MAXIM | MAX8512EXK | IC, VREG, Ultra-Low-Noise, High PSRR, Adjustable Vout, SC70-5 |
| 71 | U7 | — | 1 | MAX77958EWW+T | MAXIM | MAX77958EWW+T | EVKIT PART - IC; USB TYPE-C AND USB PD CONTROLLER; WLP30; 0.5MM PITCH; PACKAGE OUTLINE: 21-0069; PACKAGE CODE: W302A3+2 |
| 72 | Y1 | — | 1 | 7M-12.000MAAJ | TXC CORPORATION | 12MHZ | CRYSTAL; SMT; 18PF; 12MHZ; ±30PPM; ±30PPM |
| 73 | PCB | — | 1 | MAX77976 | MAXIM | PCB | PCB:MAX77976 |
| 74 | D2 | DNP | 0 | ESD9X3.3ST5G | ON SEMICONDUCTOR | 3.3V | DIODE; TVS; SMT (SOD-923); VRM = 3.3V; IPP = 9.8A |
| 75 | R3 | DNP | 0 | N/A | N/A | OPEN | RESISTOR; 0402; OPEN; FORMFACTOR |
| TOTAL | | | 219 | | | | |

MAX77975/MAX77976
Evaluation Kits

Evaluates: MAX77975/MAX77976/
MAX77958

MAX77976 EV Kit Bill of Materials

| ITEM | REF_DES | DNI/DNP | QTY | MFG PART # | MANUFACTURER | VALUE | DESCRIPTION |
|------|---|---------|-----|--|--|----------|--|
| 1 | AVL1, BATSN, BATSP, BATT5, BYPS, CC1, CC2, CHGINS, DN, DN1, DP, DP2, INTB1, SBU1, SBU2, SCL1, SDA1, SYS1, SYSS, VDD1P1, VDD1P8, VIO, VIO1, VIO2 | — | 24 | 5000 | KEystone | N/A | TEST POINT; PIN DIA = 0.1IN; TOTAL LENGTH = 0.3IN; BOARD HOLE = 0.04IN; RED; PHOSPHOR BRONZE WIRE SILVER PLATE FINISH; |
| 2 | BATTN, BATTN1, BATTP, BATTP1, BYP, CHGIN, GND1-GND5, GND7, SYS | — | 13 | 9020 BUSS | WEICO WIRE | MAXIMPAD | EVK KIT PARTS; MAXIM PAD; WIRE; NATURAL; SOLID; WEICO WIRE; SOFT DRAWN BUS TYPE-S; 20AWG |
| 3 | C1, C15, C18-C21, C23-C29, C36 | — | 14 | GRM155R71A104JA01 | MURATA | 0.1µF | CAPACITOR; SMT (0402); CERAMIC CHIP; 0.1µF; 10V; TOL = 5%; TG = -55°C TO +125°C; TC = X7R |
| 4 | C2 | — | 1 | C1608X5R1V225K080AC; GRM188R6YA225KA12 | TDK;MURATA | 2.2µF | CAPACITOR; SMT (0603); CERAMIC CHIP; 2.2µF; 35V; TOL = 10%; TG = -55°C TO +85°C; TC = X5R |
| 5 | C3, C4, C16, C17, C30-C32 | — | 7 | C0402C105K8PAC; CC0402KRX5R6BB105 | KEMET;YAGEO | 1µF | CAPACITOR; SMT (0402); CERAMIC CHIP; 1µF; 10V; TOL = 10%; TG = -55°C TO +85°C; TC = X5R |
| 6 | C5, C33, C50, C54, C55 | — | 5 | CL05A105K05NNN | SAMSUNG | 1µF | CAP; SMT (0402); 1µF; 10%; 16V; X5R; CERAMIC CHIP |
| 7 | C6, C10 | — | 2 | C2012X5R1V106K125AC | TDK | 10µF | CAPACITOR; SMT (0805); CERAMIC CHIP; 10µF; 35V; TOL = 10%; TG = -55°C TO +85°C; TC = X5R |
| 8 | C7 | — | 1 | CGA2B3X7R1H104K050BB; C1005X7R1H104K050BB; GRM155R71H104KE14; GCM155R71H104KE02; C1005X7R1H104K050BE; UMK105B7104KV-FR; CGA2B3X7R1H104K050BE | TDK;TDK; MURATA; MURATA;TDK; TAIYO YUDEN; TDK | 0.1µF | CAPACITOR; SMT (0402); CERAMIC CHIP; 0.1µF; 50V; TOL = 10%; TG = -55°C TO +125°C; TC = X7R |
| 9 | C8, C34 | — | 2 | CL10A226M07JZNC | SAMSUNG ELECTRONICS | 22µF | CAP; SMT (0603); 22µF; 20%; 16V; X5R; CERAMIC CHIP |
| 10 | C9 | — | 1 | GRM188R61C106MA73 | MURATA | 10µF | CAPACITOR; SMT (0603); CERAMIC CHIP; 10µF; 16V; TOL = 20%; MODEL = GRM SERIES; TG = -55°C TO +85°C; TC = X5R |
| 11 | C11, C14, C43, C44 | — | 4 | C0402C0G500270JNP; GRM1555C1H270JA01 | VENKEL LTD.; MURATA | 27PF | CAPACITOR; SMT; 0402; CERAMIC; 27pF; 50V; 5%; COG; -55°C to + 125°C; 0 ±30PPM/°C |
| 12 | C12, C13, C22 | — | 3 | ZRB15XR61A475ME01; CL05A475MP5NRN; GRM155R61A475MEAA; C1005X5R1A475M050BC | MURATA; SAMSUNG; MURATA;TDK | 4.7µF | CAPACITOR; SMT (0402); CERAMIC CHIP; 4.7µF; 10V; TOL = 20%; TG = -55°C TO +85°C; TC = X5R |
| 13 | C35 | — | 1 | C0402C103K5RAC; GRM155R71H103KA88; C1005X7R1H103K050BE; CL05B103KB5NNN; UMK105B7103KV | KEMET; MURATA;TDK; SAMSUNG ELECTRONIC; TAIYO YUDEN | 0.01µF | CAPACITOR; SMT (0402); CERAMIC CHIP; 0.01µF; 50V; TOL = 10%; TG = -55°C TO +125°C; TC = X7R |
| 14 | C37-C40 | — | 4 | EMK325ABJ107MM | TAIYO YUDEN | 100µF | CAPACITOR; SMT (1210); CERAMIC CHIP; 100µF; 16V; TOL = 20%; TG = -55°C TO +85°C; TC = X5R |
| 15 | C41 | — | 1 | GRM32ER60J227ME05 | MURATA | 220µF | CAP; SMT (1210); 220UF; 20%; 6.3V; X5R; CERAMIC CHIP |
| 16 | C42 | DNI | 1 | EEE-FK1V101P | PANASONIC | 100µF | CAPACITOR; SMT (CASE_F); ALUMINUM-ELECTROLYTIC; 100µF; 35V; TOL = 20%; TG = -55°C TO +105°C; AUTO |
| 17 | C46 | — | 1 | GRM188R71A225KE15; CL10B225KP8NNN; C1608X7R1A225K080AC; C0603C225K8RAC | MURATA; SAMSUNG;TDK; KEMET | 2.2µF | CAPACITOR; SMT (0603); CERAMIC CHIP; 2.2µF; 10V; TOL = 10%; TG = -55°C TO +125°C; TC = X7R |
| 18 | C47, C51 | — | 2 | ANY | ANY | 1µF | CAPACITOR; SMT (0402); CERAMIC CHIP; 1µF; 6.3V; TOL = 10%; MODEL = ; TG = -55°C TO +85°C; TC = X5R; |
| 19 | C52 | — | 1 | C1005X5R1V105K050BC | TDK | 1µF | CAPACITOR; SMT (0402); CERAMIC CHIP; 1µF; 35V; TOL = 10%; TG = -55°C TO +85°C; TC = X5R |
| 20 | D1 | — | 1 | PTVS20VS1UR | NEXPERIA | 20V | DIODE; TVS; SMT (SOD-123W); VRM = 20V; IPP = 12.3A |

MAX77975/MAX77976
Evaluation Kits

Evaluates: MAX77975/MAX77976/
MAX77958

MAX77976 EV Kit Bill of Materials (continued)

| ITEM | REF_DES | DNI/DNP | QTY | MFG PART # | MANUFACTURER | VALUE | DESCRIPTION |
|------|---|---------|-----|--|---------------------------------------|-----------------|--|
| 21 | D3 | — | 1 | SD2114S040S8R0 | AVX | SD2114S040S8R0 | DIODE; SCH; SMB (DO-214AA); PIV = 40V; IF = 8A |
| 22 | D8, D9 | — | 2 | PESD4V0W1BSF | NEXPERIA | 4V | EVKIT PART-DIODE; TVS; SMT (SOD962-2); VRM = ±4V; IPP = N/A |
| 23 | DISQBAT, EXTSM, IRQB, IRQB53, QBEXT, SCL, SDA, STAT, SUSPND | — | 9 | 5002 | KEystone | N/A | TEST POINT; PIN DIA = 0.1IN; TOTAL LENGTH = 0.3IN; BOARD HOLE = 0.04IN; WHITE; PHOSPHOR BRONZE WIRE SILVER; |
| 24 | DS1-DS3 | — | 3 | LTST-C190CKT | LITE-ON ELECTRONICS INC. | LTST-C190CKT | DIODE; LED; STANDARD; RED; SMT (0603); PIV = 5.0V; IF = 0.04A; -55°C TO +85°C |
| 25 | EXTVIO, PVDD, VDD | — | 3 | 5010 | KEystone | N/A | TEST POINT; PIN DIA = 0.125IN; TOTAL LENGTH = 0.445IN; BOARD HOLE = 0.063IN; RED; PHOSPHOR BRONZE WIRE SIL; |
| 26 | GNDS, PGNDS, SYSGNDS | — | 3 | 5001 | KEystone | N/A | TEST POINT; PIN DIA = 0.1IN; TOTAL LENGTH = 0.3IN; BOARD HOLE = 0.04IN; BLACK; PHOSPHOR BRONZE WIRE SILVER PLATE FINISH; |
| 27 | J1 | — | 1 | 10118193-0001LF | FCI CONNECT | 10118193-0001LF | CONNECTOR; FEMALE; SMT; MICRO USB B TYPE RECEPTACLE; RIGHT ANGLE; 5PINS |
| 28 | J2 | — | 1 | 12401832E402A | AMPHENOL | 12401832E402A | CONNECTOR; FEMALE; SMT; USB TYPE C CONNECTOR; RIGHT ANGLE; DUAL ROW; 24PINS |
| 29 | J3, J4, J9, J11, J12, J14, J16, J30-J32, J34, J35 | — | 12 | TSW-102-07-T-S | SAMTEC | TSW-102-07-T-S | CONNECTOR; THROUGH HOLE; TSW SERIES; SINGLE ROW; STRAIGHT; 2PINS; -55°C TO +105°C |
| 30 | J5, J20 | — | 2 | PBC04DAAN | SULLINS ELECTRONICS CORP. | PBC04DAAN | CONNECTOR; MALE; THROUGH HOLE; BREAKAWAY; STRAIGHT; 8PINS; -65°C TO +125°C |
| 31 | J7, J8, J10 | — | 3 | PEC03SAAN | SULLINS ELECTRONICS CORP. | PEC03SAAN | EVKIT PART-CONNECTOR; MALE; THROUGH HOLE; BREAKAWAY; STRAIGHT; 3PINS; -65°C TO +125°C; |
| 32 | J13, J17, J18, J21, J22, J29, J36, J37 | — | 8 | PBC02SAAN | SULLINS ELECTRONICS CORP. | PBC02SAAN | CONNECTOR; MALE; THROUGH HOLE; BREAKAWAY; STRAIGHT; 2PINS |
| 33 | J15, J23 | — | 2 | PBC02DAAN | SULLINS ELECTRONICS CORP. | PBC02DAAN | CONNECTOR; MALE; THROUGH HOLE; BREAKAWAY; STRAIGHT; 4PINS |
| 34 | J33 | — | 1 | PBC09SAAN | SULLINS ELECTRONICS CORP. | PBC09SAAN | CONNECTOR; MALE; THROUGH HOLE; BREAKAWAY; STRAIGHT; 9PINS; -65°C TO +125°C |
| 35 | L1 | — | 1 | IHLP2020BZER1R0M11 | VISHAY DALE | 1UH | INDUCTOR; SMT; IHLP SERIES; 1µH; TOL = ±20%; 7A; -55°C TO +125°C |
| 36 | L2-L4 | — | 3 | BLM18AG601SN1 | MURATA | 600 | INDUCTOR; SMT (0603); FERRITE-BEAD; 600; TOL = ±; 0.5A |
| 37 | MH1-MH4 | — | 4 | 9032 | KEystone | 9032 | MACHINE FABRICATED; ROUND-THRU HOLE SPACER; NO THREAD; M3.5; 5/8IN; NYLON |
| 38 | MISC1 | — | 1 | AK67421-1-R | ASSMANN | AK67421-1-R | CONNECTOR; MALE; USB; USB2.0 MICRO CONNECTION CABLE; USB B MICRO MALE TO USB A MALE; STRAIGHT; 5PINS-4PINS |
| 39 | Q1, Q2 | — | 2 | AON6512 | ALPHA & OMEGA SEMICONDUCTOR | AON6512 | TRAN; N-CHANNEL ALPHAMOS; NCH; DFN8-EP; PD-(83W); I(150A); V-(30V) |
| 40 | R1, R7, R14-R16, R18, R22, R32-R34, R44 | — | 11 | ERJ-2GE0R00 | PANASONIC | 0 | RESISTOR; 0402; 0Ω; 0%; JUMPER; 0.10W; THICK FILM |
| 41 | R2, R42 | — | 2 | CRCW060310K0FK; ERJ-3EKF1002 | VISHAY DALE; PANASONIC | 10K | RESISTOR; 0603; 10K; 1%; 100PPM; 0.10W; THICK FILM |
| 42 | R4, R6 | — | 2 | ERJ-2RKF6493 | PANASONIC | 649K | RESISTOR; 0402; 649KΩ; 1%; 100PPM; 0.1W; THICK FILM |
| 43 | R5, R64 | — | 2 | ERJ-2RKF1203 | PANASONIC | 120K | RESISTOR; 0402; 120KΩ; 1%; 100PPM; 0.1W; THICK FILM |
| 44 | R8 | — | 1 | CRCW040212K0FK; MCR01MZPF1202 | VISHAY DALE; ROHM SEMICONDUCTOR | 12K | RESISTOR, 0402, 12KΩ, 1%, 100PPM, 0.0625W, THICK FILM |
| 45 | R9, R13 | — | 2 | ERJ-2RKF27R0X; RC0402FR-0727RL; CRCW040227R0FK | PANASONIC; YAGEO PHICOMP; VISHAY DALE | 27 | RESISTOR, 0402, 27Ω, 1%, 100PPM, 0.0625W, THICK FILM |


MAX77975/MAX77976
Evaluation Kits

Evaluates: MAX77975/MAX77976/
MAX77958


MAX77976 EV Kit Bill of Materials (continued)

| ITEM | REF_DES | DNI/DNP | QTY | MFG PART # | MANUFACTURER | VALUE | DESCRIPTION |
|--------------|----------------------------|---------|------------|---|---|---------------|---|
| 46 | R10 | — | 1 | CRCW04021M00FK | VISHAY DALE | 1M | RESISTOR; 0402; 1M; 1%; 100PPM; 0.0625W; THICK FILM |
| 47 | R11, R36, R37, R45 | — | 4 | CRCW04021K00FK; RC0402FR-071KL; MCR01MZPF1001 | VISHAY DALE; YAGEO PHICOMP; ROHM SEMI | 1K | RESISTOR; 0402; 1K; 1%; 100PPM; 0.0625W; THICK FILM |
| 48 | R12, R21 | — | 2 | CRCW04022K20JN | VISHAY DALE | 2.2K | RESISTOR; 0402; 2.2KΩ; 5%; 200PPM; 0.063W; METAL FILM |
| 49 | R17 | — | 1 | CRCW04024752FK; 9C04021A4752FLHF3; CRCW040247K5FK | VISHAY DALE; YAGEO; VISHAY DALE | 47.5K | RESISTOR; 0402; 47.5K; 1%; 100PPM; 0.0625W; THICK FILM |
| 50 | R19, R20, R23, R31, R41 | — | 5 | CRCW0402100KFK; RC0402FR-07100KL | VISHAY;YAGEO | 100K | RESISTOR; 0402; 100K; 1%; 100PPM; 0.0625W; THICK FILM |
| 51 | R24, R38 | — | 2 | CRCW040210R0FK; 9C04021A10R0FL | VISHAY DALE;YAGEO | 10 | RESISTOR; 0402; 10Ω; 1%; 100PPM; 0.0625W; THICK FILM |
| 52 | R25, R29 | — | 2 | ERJ-2RKF5602 | PANASONIC | 56K | RESISTOR, 0402, 56KΩ, 1%, 100PPM, 0.0625W, THICK FILM |
| 53 | R26, R48 | — | 2 | CRCW0402200KFK; RF73H1ELTP2003 | VISHAY DALE; KOA SPEER ELECTRONICS | 200K | RESISTOR; 0402; 200K; 1%; 100PPM; 0.0625W; THICK FILM |
| 54 | R27, R28 | — | 2 | CRCW04024K70FK; MCR01MZPF4701 | VISHAY DALE; ROHM SEMICONDUCTOR | 4.7K | RESISTOR, 0402, 4.7KΩ, 1%, 100PPM, 0.0625W, THICK FILM |
| 55 | R30 | — | 1 | CRCW0402169KFK | VISHAY DALE | 169K | RESISTOR; 0402; 169KΩ; 1%; 100PPM; 0.063W; THICK FILM |
| 56 | R35 | — | 1 | CRCW0402470RFK | VISHAY DALE | 470 | RESISTOR, 0402, 470Ω, 1%, 100PPM, 0.0625W, THICK FILM |
| 57 | R39, R40 | — | 2 | CRCW04025K10FK | VISHAY DALE | 5.1K | RESISTOR; 0402; 5.1K; 1%; 100PPM; 0.0625W; THICK FILM |
| 58 | R43 | — | 1 | 3296Y-1-104LF | BOURNS | 100K | RESISTOR; THROUGH HOLE-RADIAL LEAD; 3296 SERIES; 100KΩ; 10%; 100PPM; 0.5W |
| 59 | R49, R50, R59, R60 | — | 4 | CRCW06030000Z0EAHP | VISHAY DRALORIC | 0 | RESISTOR; 0603; 0Ω; 0%; JUMPER; 0.25W; THICK FILM |
| 60 | R51, R52 | — | 2 | CRCW04021R00FK | VISHAY DALE | 1 | RESISTOR, 0402, 1Ω, 1%, 100PPM, 0.0625W, THICK FILM |
| 61 | R55, R57 | — | 2 | CRCW04022K20FK; RC0402FR-072K2L | VISHAY DALE; YAGEO PHICOMP | 2.2K | RESISTOR, 0402, 2.2KΩ, 1%, 100PPM, 0.0625W, THICK FILM |
| 62 | R66, R67 | — | 2 | CRCW0402330KFK | VISHAY DALE | 330K | RESISTOR, 0402, 330KΩ, 1%, 100PPM, 0.0625W, THICK FILM |
| 63 | RT1 | — | 1 | NTCG163JF103F | TDK | 10K | THERMISTOR; SMT (0603); THICK FILM (NICKEL PLATED); 10K; TOL = ±1% |
| 64 | SW1 | — | 1 | CL-SB-22C-02 | COPAL ELECTRONICS INC. | CL-SB-22C-02 | SWITCH; DPDT; THROUGH HOLE; 12V; 0.2A; ON-ON; RCOIL = 0.05Ω; RINSULATION = 10MΩ; COPAL ELECTRONICS INC.; -40°C TO +85°C |
| 65 | SW2 | — | 1 | EVQ-Q2K03W | PANASONIC | EVQ-Q2K03W | SWITCH; SPST; SMT; 15V; 0.02A; LIGHT TOUCH SWITCH; RCOIL = Ω; RINSULATION = Ω; PANASONIC |
| 66 | U1 | — | 1 | MAX77976 | MAXIM | MAX77976 | EVKIT PART - IC; MAX77976; 19V INPUT; 5.5A BUCK CHARGER FOR 1S LHON BATTERY; PACK; PACKAGE OUTLINE DRAWING 21-100411; LAND PATTERN DRAWING: 90-100145; PACKAGE CODE: F234A4F-1 FCQFN32 |
| 67 | U2 | — | 1 | FT2232HL | FUTURE TECHNOLOGY DEVICES INTL LTD. | FT2232HL | IC; MMRY; DUAL HIGH SPEED USB TO MULTIPURPOSE UART/FFO; LQFP64 |
| 68 | U3 | — | 1 | TCK402G | TOSHIBA | TCK402G | IC; ASW; CMOS LINEAR INTEGRATED CIRCUIT SILICON MONOLITHIC; WLCSP6 |
| 69 | U4 | — | 1 | MAX14611ETD+ | MAXIM | MAX14611ETD+ | IC; TRANS; QUAD BIDIRECTIONAL LOW-VOLTAGE LOGIC LEVEL TRANSLATOR; TDFN14-EP |
| 70 | U5, U6 | — | 2 | MAX8512EXK+ | MAXIM | MAX8512EXK | IC, VREG, Ultra-Low-Noise, High PSRR, Adjustable Vout, SC70-5 |
| 71 | U7 | — | 1 | MAX77958EWW+T | MAXIM | MAX77958EWW+T | EVKIT PART - IC; USB TYPE-C AND USB PD CONTROLLER; WLP30; 0.5MM PITCH; PACKAGE OUTLINE: 21-0069; PACKAGE CODE: W302A3+2 |
| 72 | Y1 | — | 1 | 7M-12.000MAAJ | TXC CORPORATION | 12MHZ | CRYSTAL; SMT; 18PF; 12MHZ; ±30PPM; ±30PPM |
| 73 | PCB | — | 1 | MAX77976 | MAXIM | PCB | PCB:MAX77976 |
| 74 | D2 | DNP | 0 | ESD9X3.3ST5G | ON SEMICONDUCTOR | 3.3V | DIODE; TVS; SMT (SOD-923); VRM = 3.3V; IPP = 9.8A |
| 75 | R3 | DNP | 0 | N/A | N/A | OPEN | RESISTOR; 0402; OPEN; FORMFACTOR |
| TOTAL | | | 219 | | | | |


MAX77975/MAX77976 EV Kit Schematic

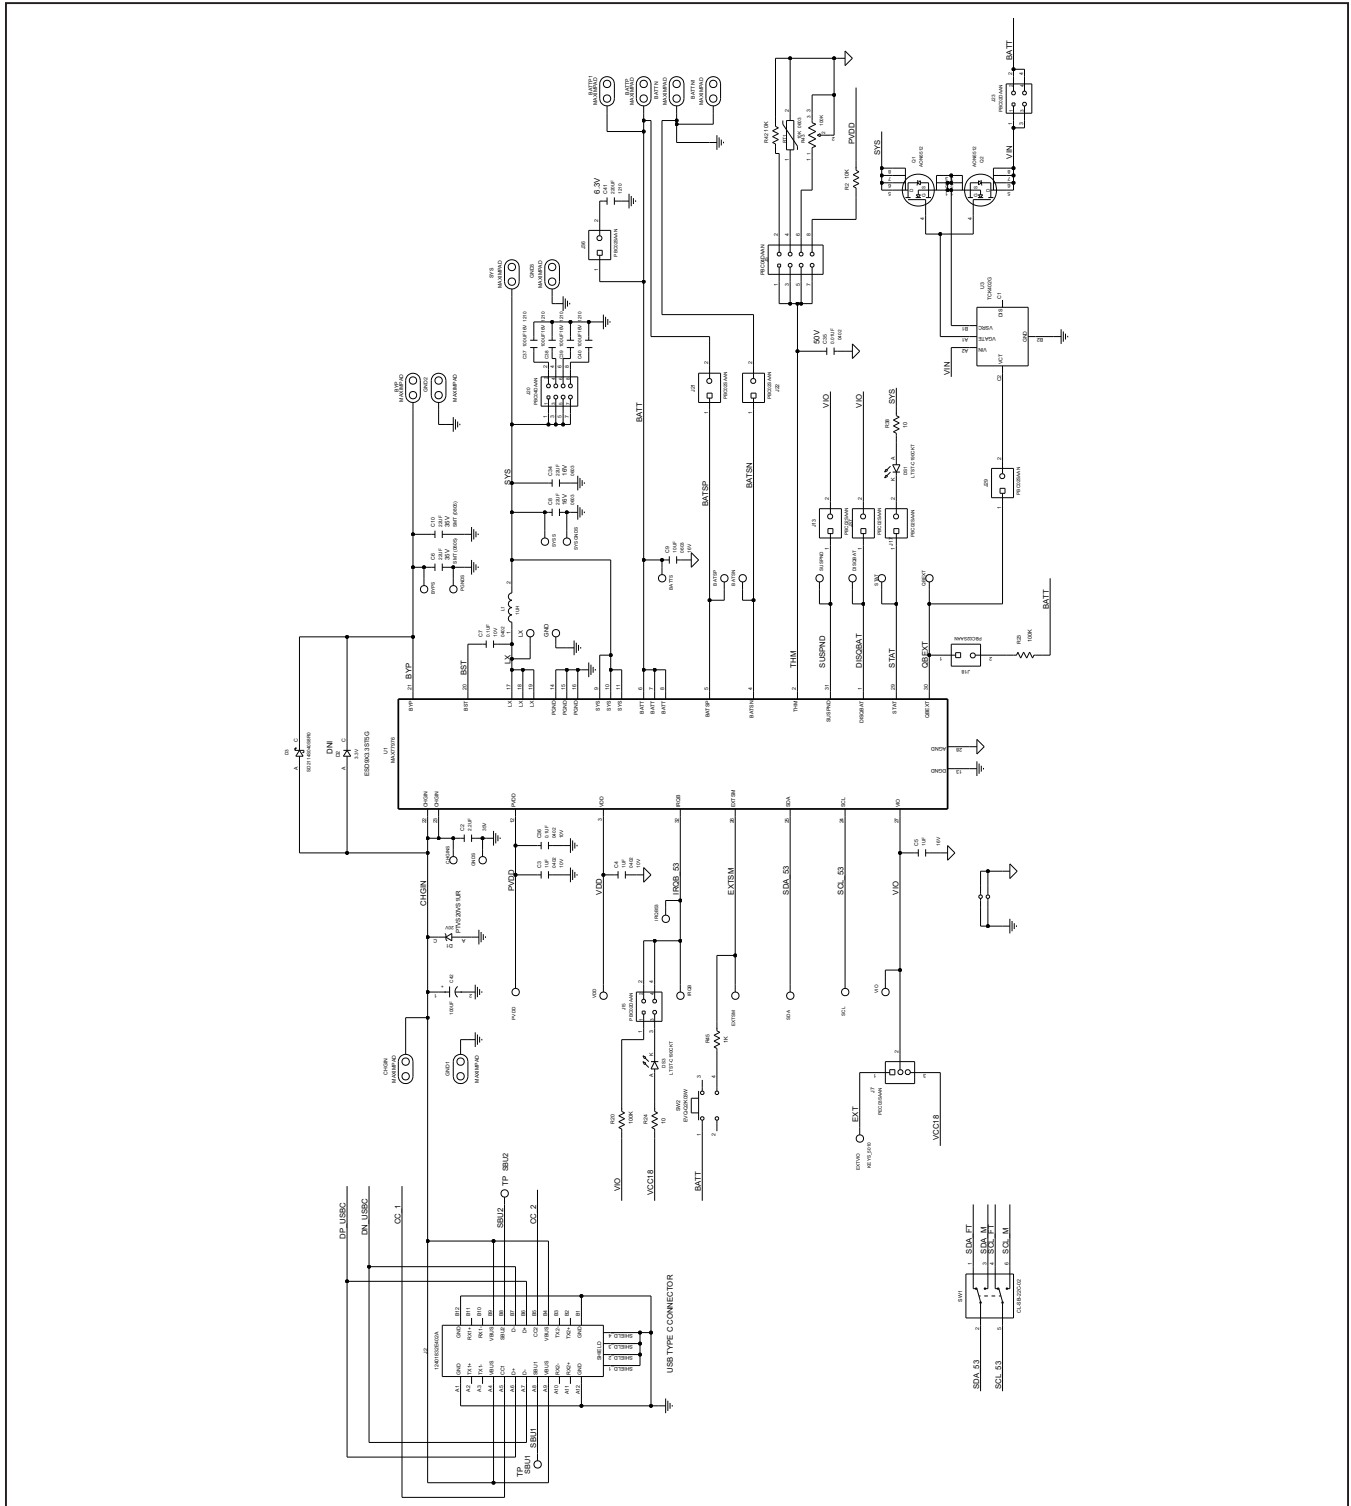


MAX77975/MAX77976 EV Kit Schematic (continued)

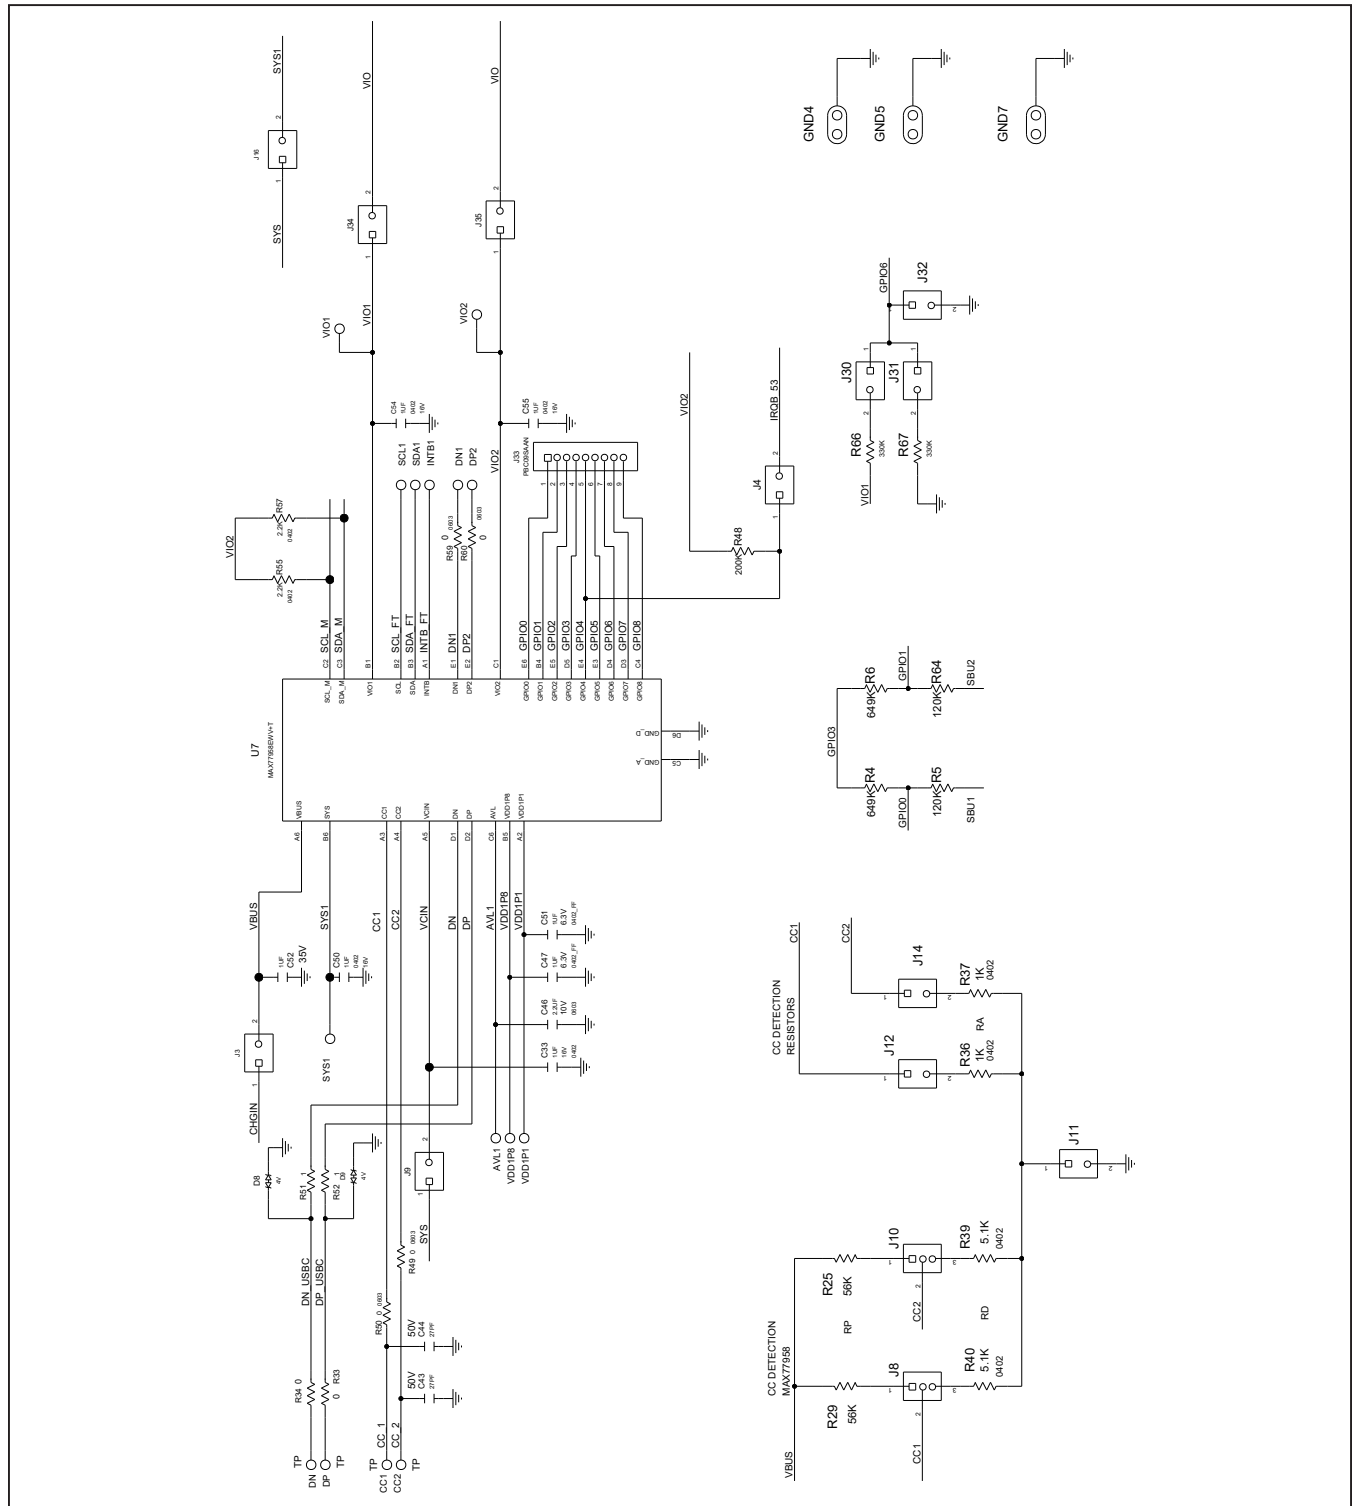


MAX77975/MAX77976 EV Kit Schematic (continued)

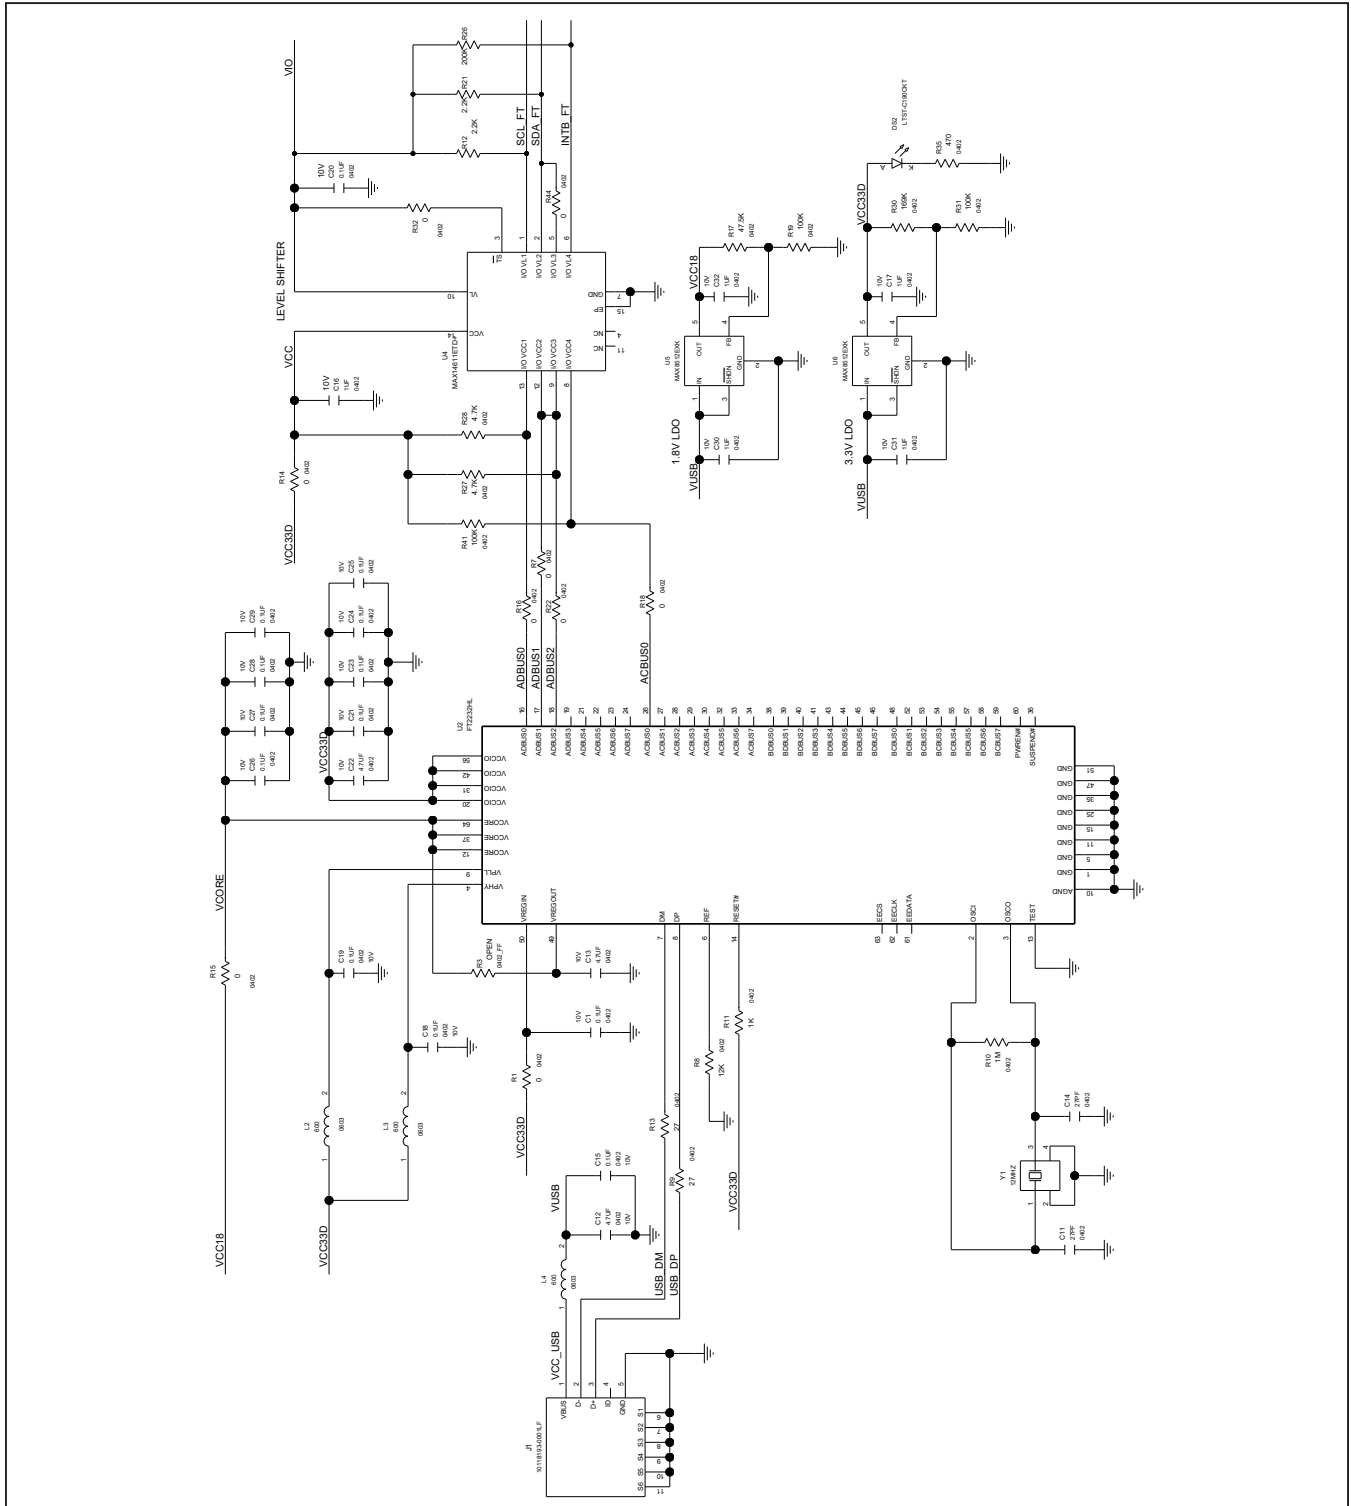

MAX77975/MAX77976 EV Kit Schematic (continued)

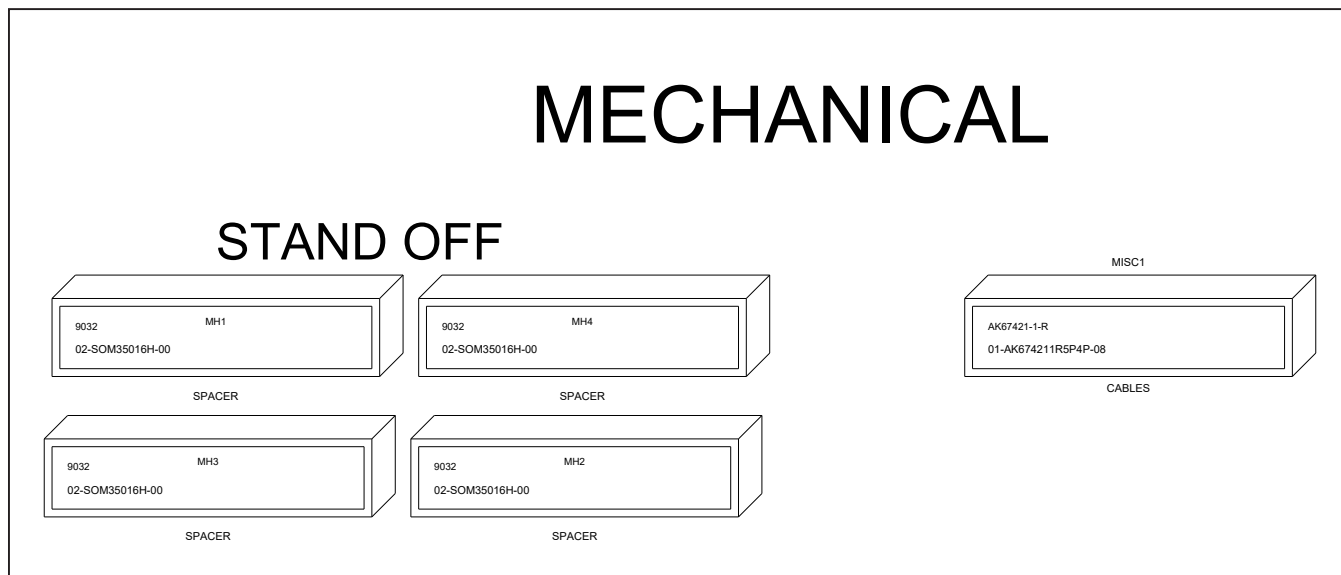


MAX77975/MAX77976 EV Kit PCB Layout

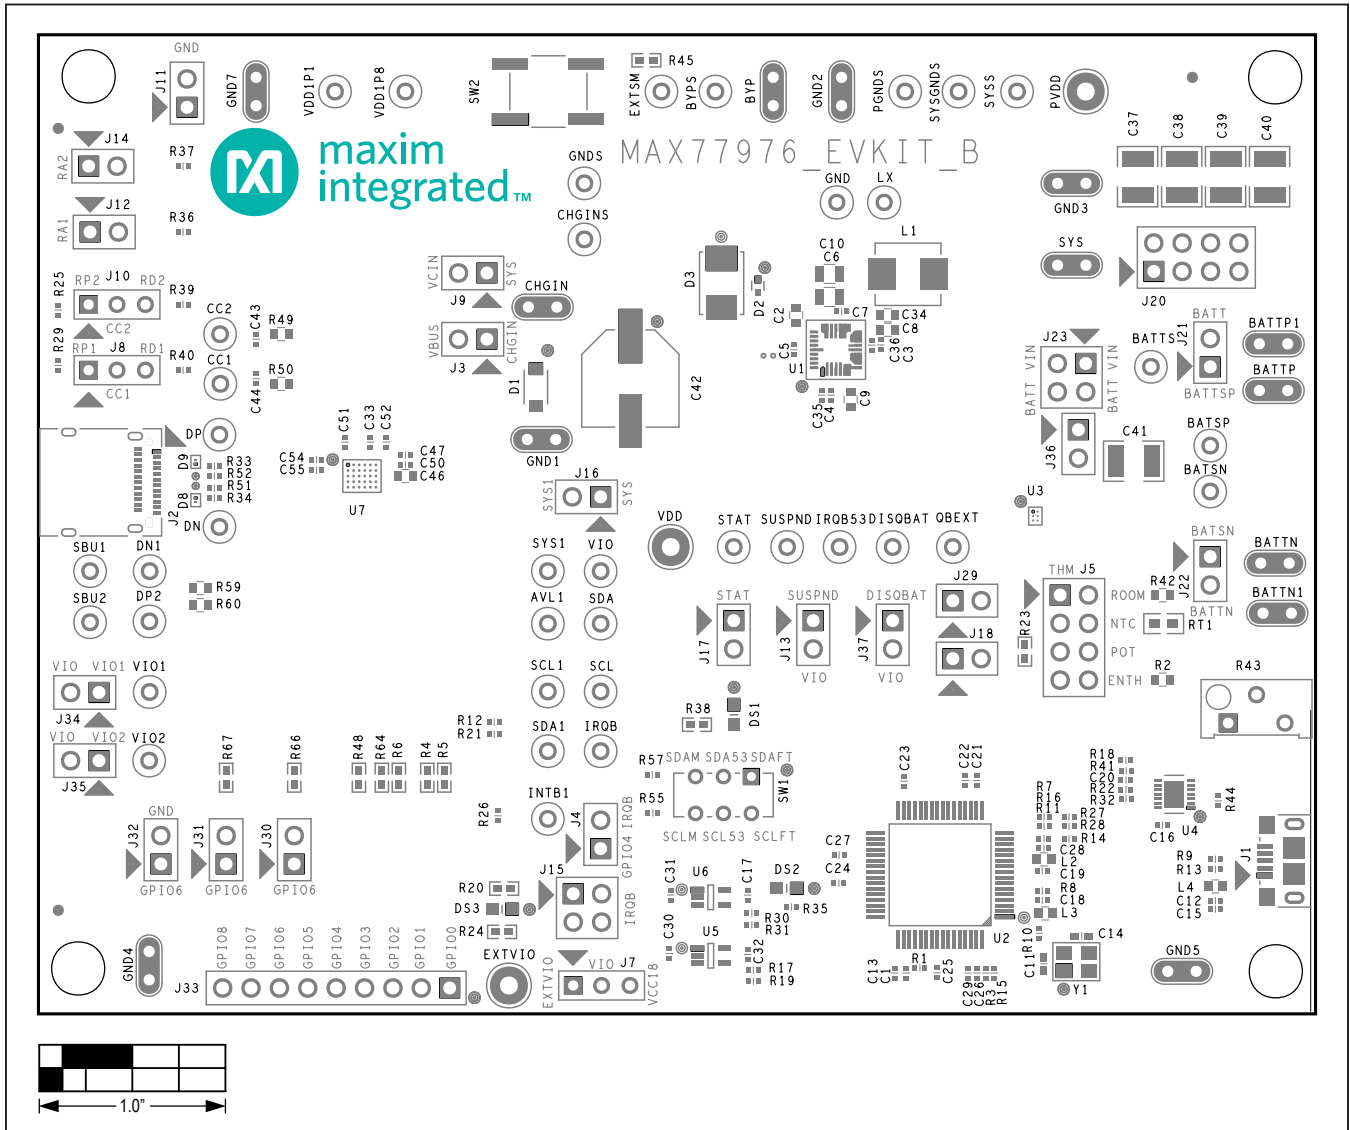


MAX77975/MAX77976 EV Kit Component Placement Guide—Top Silkscreen

MAX77975/MAX77976 EV Kit PCB Layout (continued)

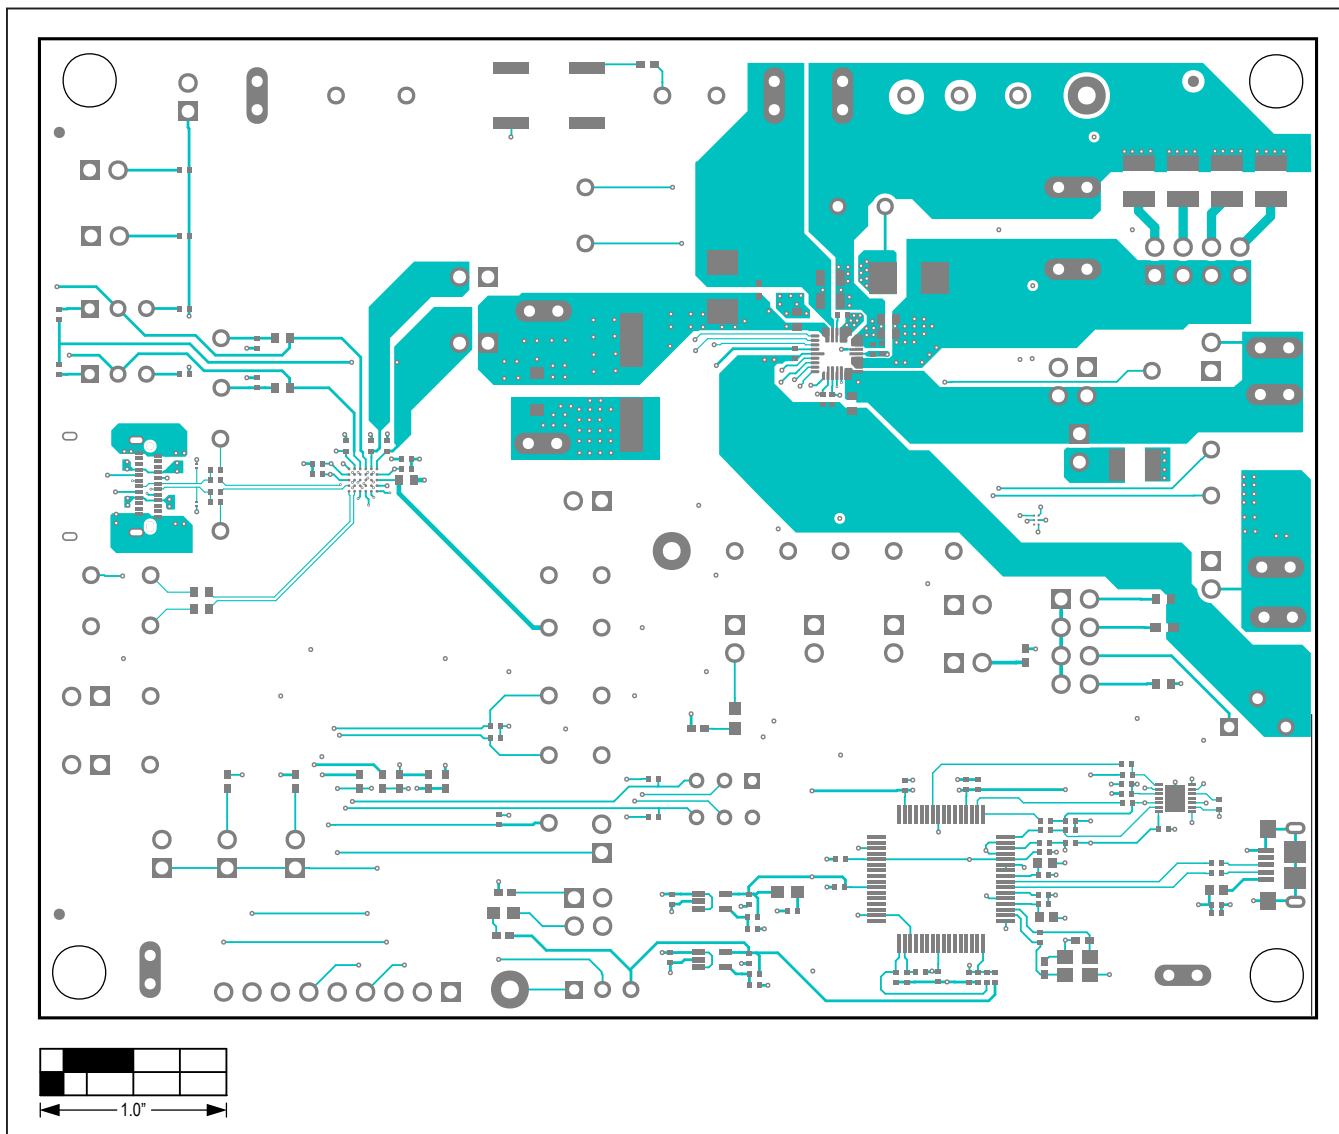


MAX77975/MAX77976 EV Kit PCB Layout—Top View

MAX77975/MAX77976 EV Kit PCB Layout (continued)

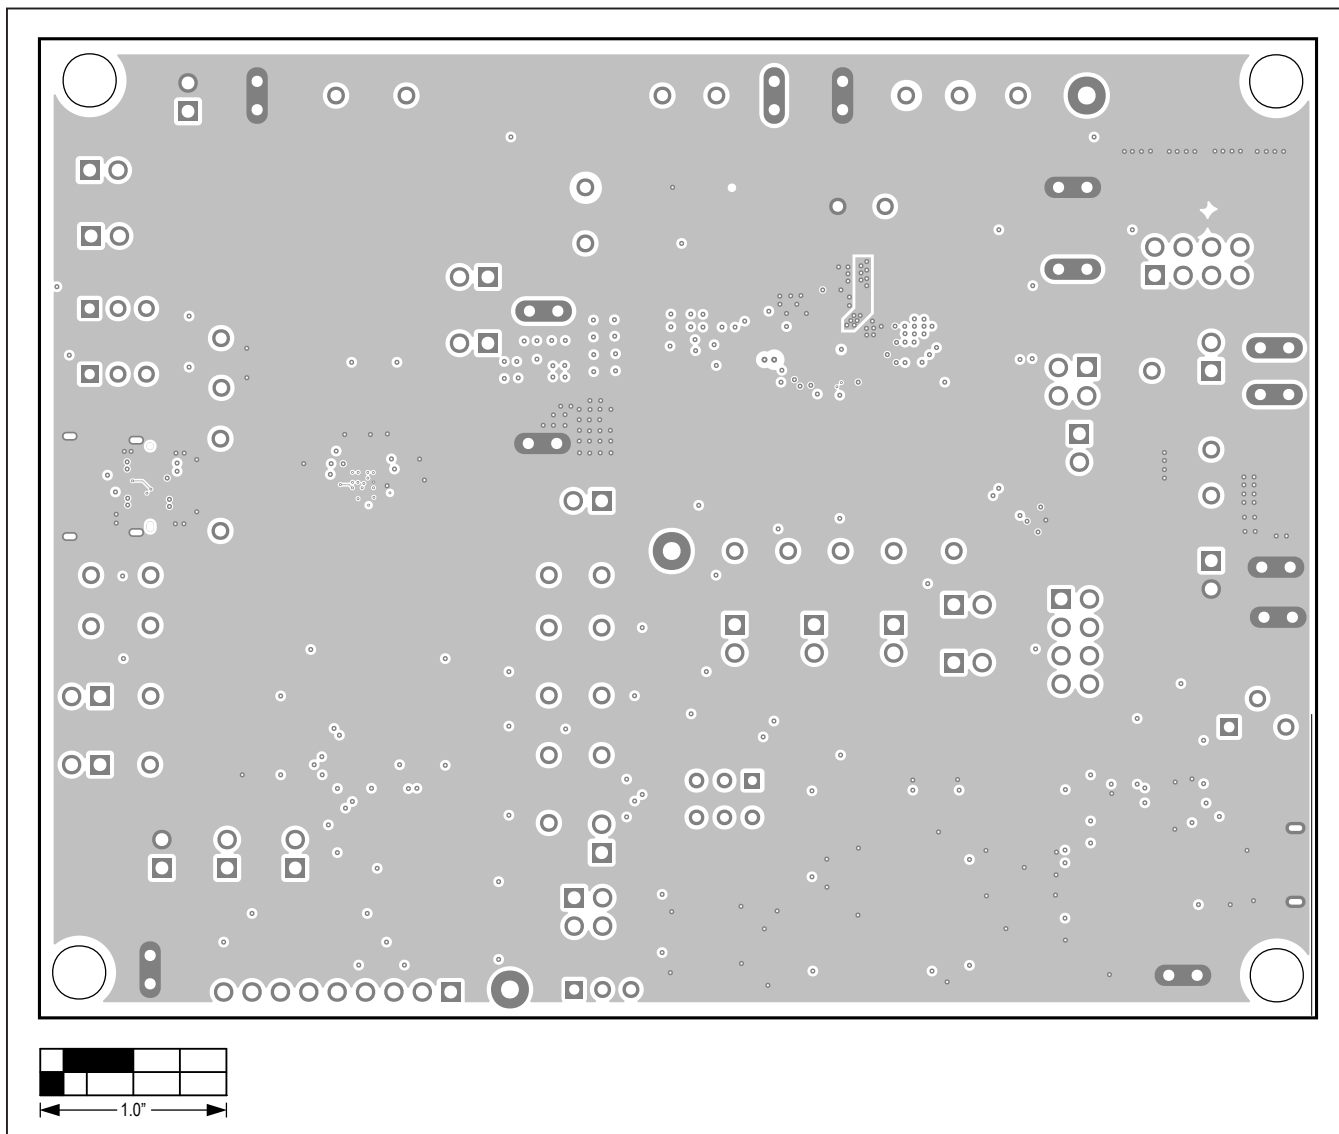


MAX77975/MAX77976 EV Kit PCB Layout—Layer 2

MAX77975/MAX77976 EV Kit PCB Layout (continued)

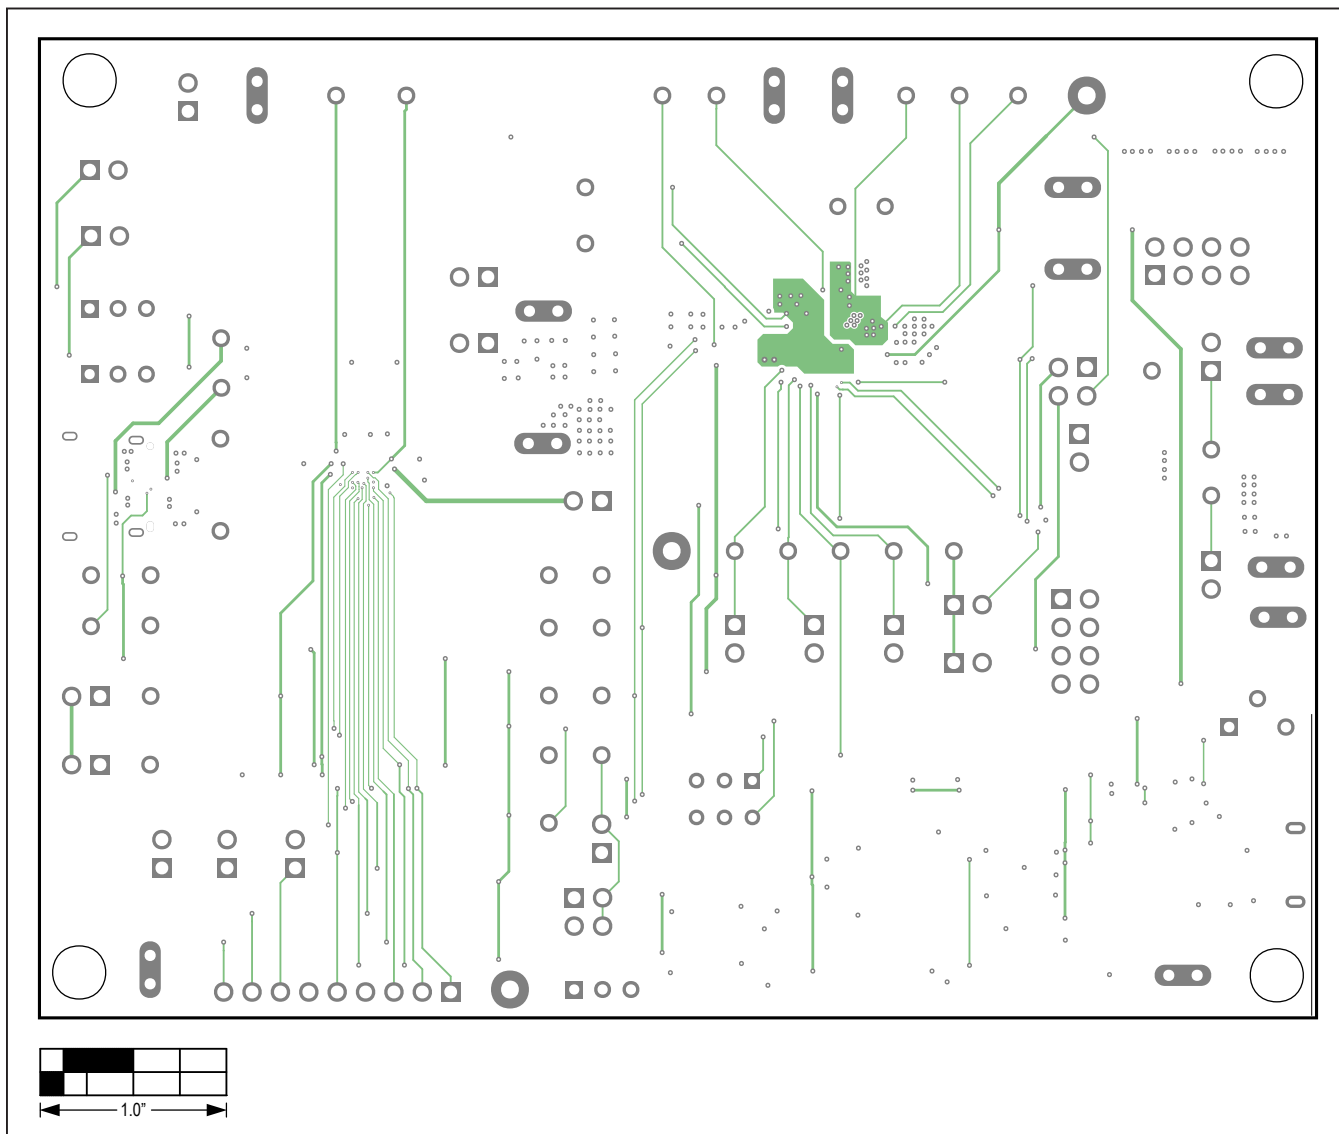


MAX77975/MAX77976 EV Kit PCB Layout—Layer 3

MAX77975/MAX77976 EV Kit PCB Layout (continued)

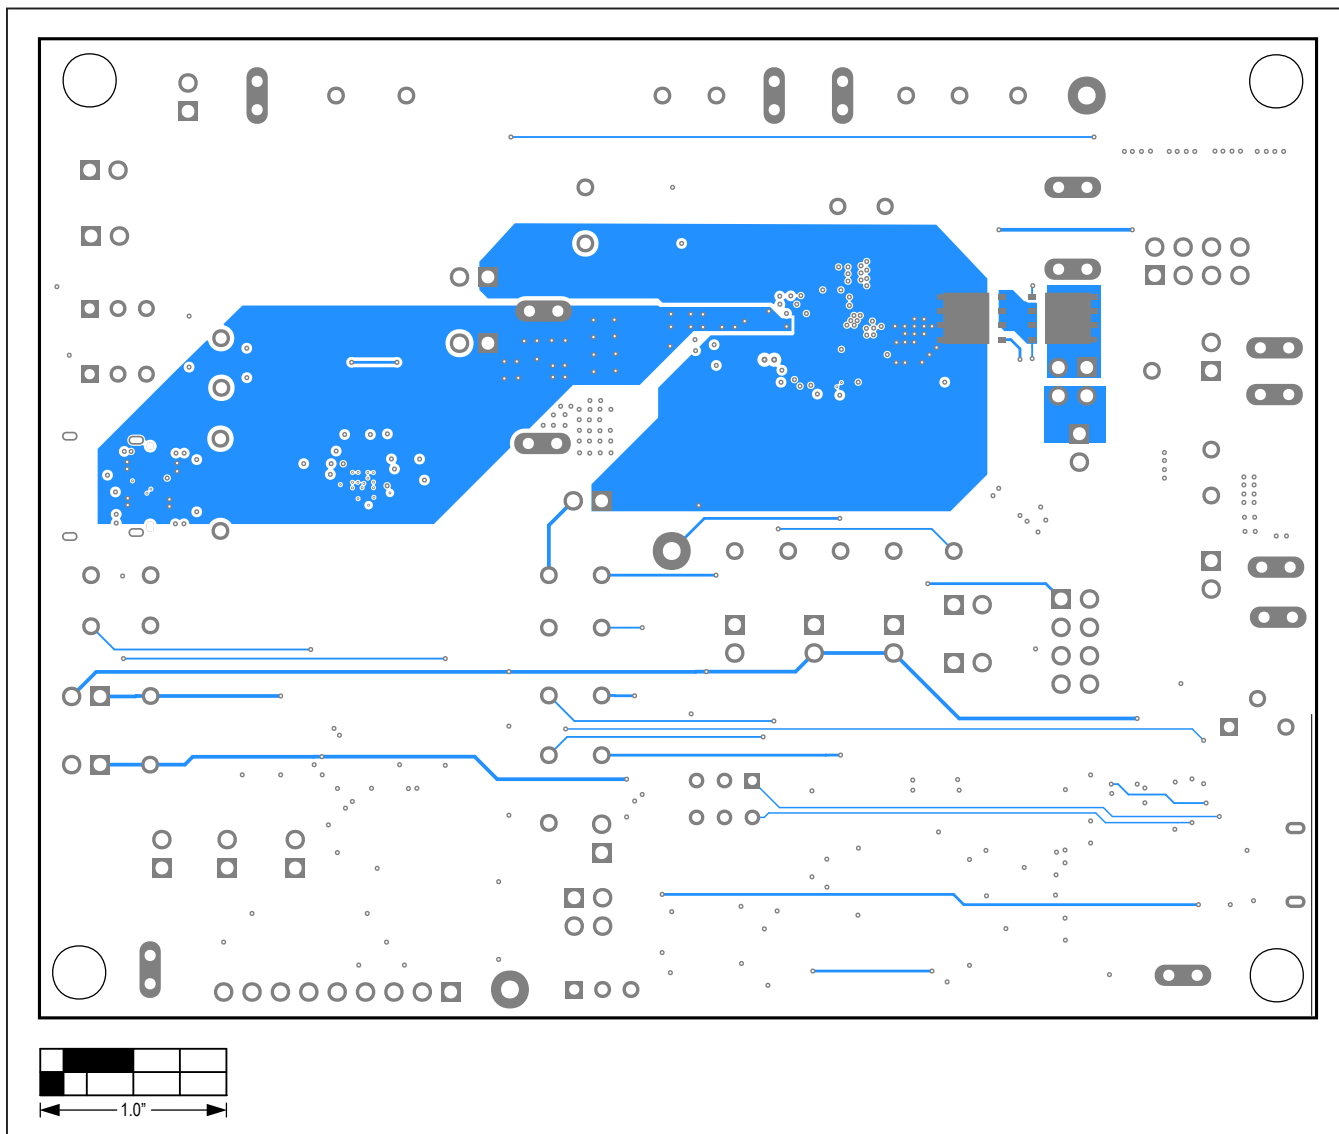

MAX77975/MAX77976 EV Kit PCB Layout—Bottom View

MAX77975/MAX77976 EV Kit PCB Layout (continued)

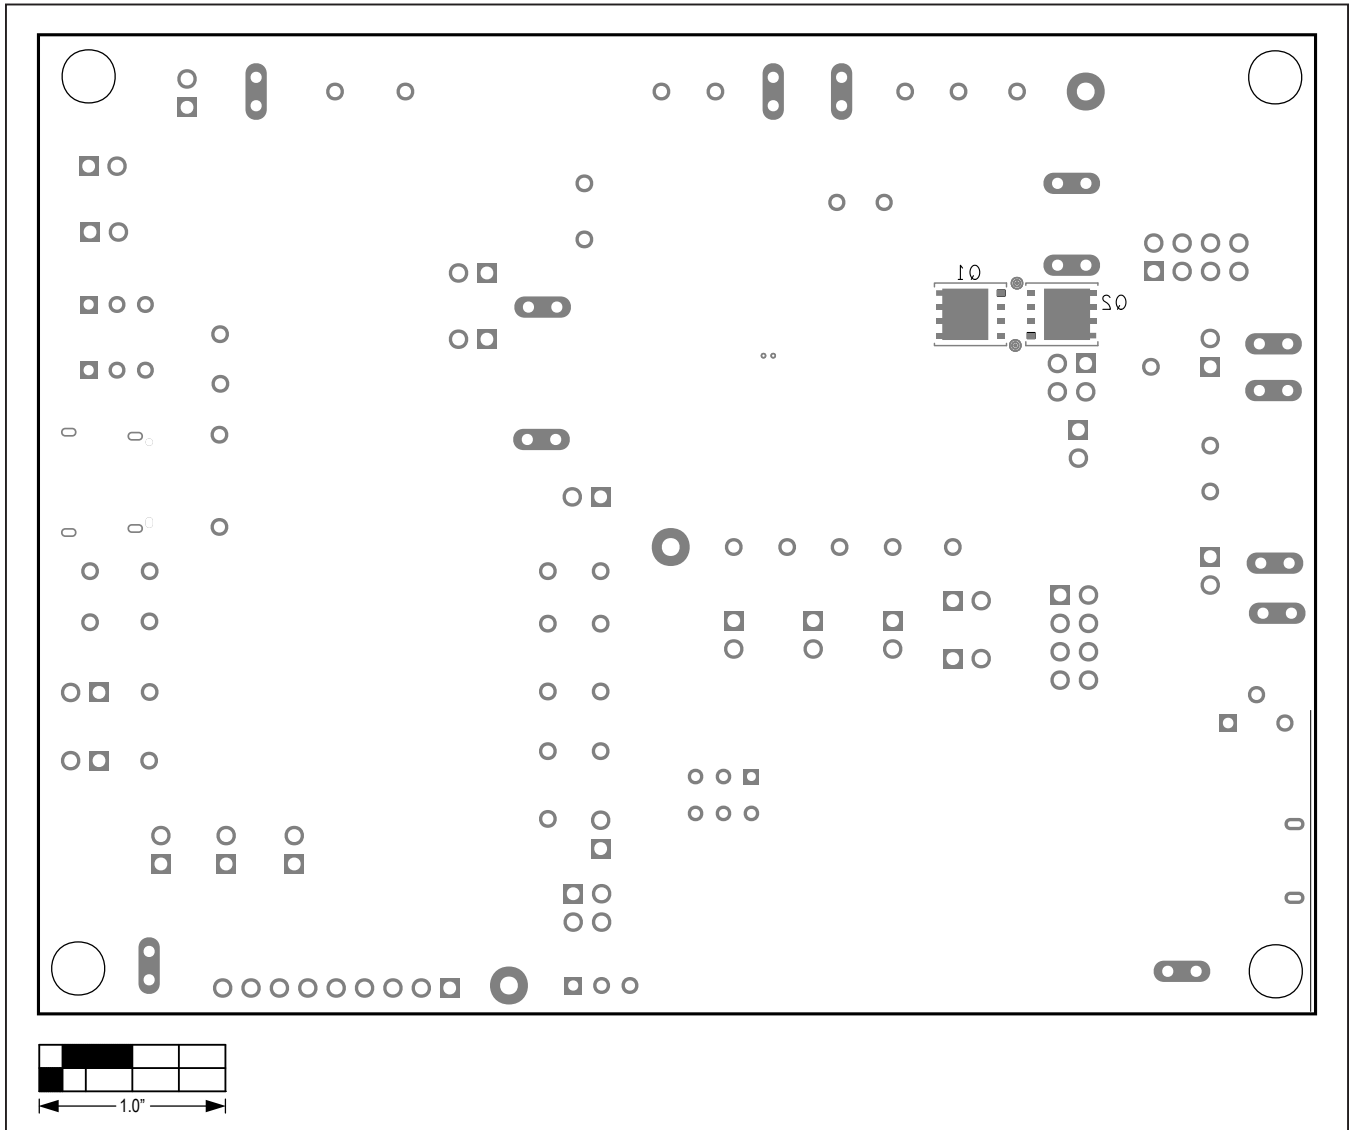

MAX77975/MAX77976 EV Kit PCB Layout—Bottom Silkscreen

Revision History

| REVISION NUMBER | REVISION DATE | DESCRIPTION | PAGES CHANGED |
|-----------------|---------------|---|---------------|
| 0 | 9/20 | Initial release | — |
| 1 | 11/20 | Updated <i>Ordering Information</i> table | 14 |

For pricing, delivery, and ordering information, please visit Maxim Integrated's online storefront at <https://www.maximintegrated.com/en/storefront/storefront.html>.

Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time.