## SIEMENS

## Data sheet

## 3RT2317-2AM20



Contactor, AC-1, 22 A/400 V/40  $^\circ\text{C},$  S00, 4-pole, 208 V AC, 50/60 Hz, Spring-type terminal

| product brand name  | SIRIUS                     |
|---|----------------------------|
| product designation   | Contactor                  |
| product type designation  | 3RT23                      |
| General technical data  |                            |
| size of contactor   | S00                        |
| product extension   |                            |
| <ul> <li>function module for communication</li> </ul>   | No                         |
| auxiliary switch  | Yes                        |
| power loss [W] for rated value of the current   |                            |
| <ul> <li>at AC in hot operating state</li> </ul>  | 6.4 W                      |
| <ul> <li>at AC in hot operating state per pole</li> </ul>   | 1.6 W                      |
| insulation voltage  |                            |
| <ul> <li>of main circuit with degree of pollution 3 rated value</li> </ul>                          | 690 V                      |
| <ul> <li>of the auxiliary and control circuit with degree of<br/>pollution 3 rated value</li> </ul> | 690 V                      |
| surge voltage resistance  |                            |
| <ul> <li>of main circuit rated value</li> </ul>   | 6 kV                       |
| <ul> <li>of auxiliary circuit rated value</li> </ul>  | 6 kV                       |
| shock resistance at rectangular impulse   |                            |
| • at AC   | 7,3g / 5 ms, 4,7g / 10 ms  |
| shock resistance with sine pulse  |                            |
| • at AC   | 11,4g / 5 ms, 7,3g / 10 ms |
| mechanical service life (switching cycles)  |                            |
| <ul> <li>of contactor typical</li> </ul>  | 30 000 000                 |
| <ul> <li>of the contactor with added auxiliary switch block<br/>typical</li> </ul>                  | 10 000 000                 |
| reference code according to IEC 81346-2   | Q                          |
| Substance Prohibitance (Date)   | 10/01/2009                 |
| Ambient conditions  |                            |
| installation altitude at height above sea level maximum   | 2 000 m                    |
| ambient temperature   |                            |
| <ul> <li>during operation</li> </ul>  | -25 +60 °C                 |
| during storage  | -55 +80 °C                 |
| relative humidity minimum   | 10 %                       |
| relative humidity at 55 °C according to IEC 60068-2-30 maximum                                      | 95 %                       |
| Main circuit  |                            |
| number of poles for main current circuit  | 4                          |
| number of NO contacts for main contacts   | 4                          |
| operational current   |                            |

| • at AC-1 at 400 V at ambient temperature 40 °C rated value  | 22 A   |
|--|--|
| <ul> <li>at AC-1</li> <li>— up to 690 V at ambient temperature 40 °C</li> </ul>  | 22 A   |
| rated value<br>— up to 690 V at ambient temperature 60 °C<br>rated value   | 20 A   |
| • at AC-3  |  |
| — at 400 V rated value   | 12 A   |
| <ul> <li>at AC-4 at 400 V rated value</li> </ul>   | 8.5 A  |
| minimum cross-section in main circuit at maximum AC-1 rated value  | 4 mm <sup>2</sup>  |
| operating power  |  |
| <ul> <li>at AC-3 at 400 V rated value</li> </ul>   | 5.5 kW   |
| <ul> <li>at AC-4 at 400 V rated value</li> </ul>   | 4 kW   |
| short-time withstand current in cold operating state up to 40 °C   |  |
| <ul> <li>limited to 1 s switching at zero current maximum</li> </ul>   | Use minimum cross-section acc. to AC-1 rated value   |
| <ul> <li>limited to 5 s switching at zero current maximum</li> </ul>   | Use minimum cross-section acc. to AC-1 rated value   |
| <ul> <li>limited to 10 s switching at zero current maximum</li> </ul>  | Use minimum cross-section acc. to AC-1 rated value   |
| <ul> <li>limited to 30 s switching at zero current maximum</li> </ul>  | Use minimum cross-section acc. to AC-1 rated value   |
| <ul> <li>limited to 60 s switching at zero current maximum</li> </ul>  | Use minimum cross-section acc. to AC-1 rated value   |
| no-load switching frequency  |  |
| • at AC  | 10 000 1/h   |
| operating frequency at AC-1 maximum  | 1 000 1/h  |
| Control circuit/ Control   |  |
| type of voltage  | AC   |
| type of voltage of the control supply voltage  | AC   |
| control supply voltage at AC   |  |
| at 50 Hz rated value   | 208 V  |
| at 60 Hz rated value   | 208 V  |
|  |  |
| operating range factor control supply voltage rated  |  |
| operating range factor control supply voltage rated value of magnet coil at AC   |  |
|  | 0.8 1.1  |
| value of magnet coil at AC   | 0.8 1.1<br>0.85 1.1  |
| • at 50 Hz   |  |
| <ul> <li>value of magnet coil at AC</li> <li>● at 50 Hz</li> <li>● at 60 Hz</li> </ul>   |  |
| value of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>apparent pick-up power of magnet coil at AC  | 0.85 1.1   |
| <ul> <li>value of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul> apparent pick-up power of magnet coil at AC <ul> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul>  | 0.85 1.1<br>37 VA  |
| <ul> <li>value of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul> apparent pick-up power of magnet coil at AC <ul> <li>at 50 Hz</li> </ul>  | 0.85 1.1<br>37 VA  |
| value of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>apparent pick-up power of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>inductive power factor with closing power of the coil<br>• at 50 Hz   | 0.85 1.1<br>37 VA<br>33 VA<br>0.8  |
| value of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>apparent pick-up power of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>inductive power factor with closing power of the coil<br>• at 50 Hz<br>• at 60 Hz   | 0.85 1.1<br>37 VA<br>33 VA   |
| value of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>apparent pick-up power of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>inductive power factor with closing power of the coil<br>• at 50 Hz   | 0.85 1.1<br>37 VA<br>33 VA<br>0.8  |
| value of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>apparent pick-up power of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>inductive power factor with closing power of the coil<br>• at 50 Hz<br>• at 60 Hz<br>• at 60 Hz<br>• at 60 Hz   | 0.85 1.1<br>37 VA<br>33 VA<br>0.8<br>0.75  |
| value of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>apparent pick-up power of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>inductive power factor with closing power of the coil<br>• at 50 Hz<br>• at 60 Hz<br>• at 60 Hz<br>• at 60 Hz<br>• at 50 Hz<br>• at 50 Hz<br>• at 50 Hz   | 0.85 1.1<br>37 VA<br>33 VA<br>0.8<br>0.75<br>5.7 VA  |
| value of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>apparent pick-up power of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>inductive power factor with closing power of the coil<br>• at 50 Hz<br>• at 60 Hz<br>apparent holding power of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>inductive power factor with the holding power of the  | 0.85 1.1<br>37 VA<br>33 VA<br>0.8<br>0.75<br>5.7 VA  |
| value of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>apparent pick-up power of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>inductive power factor with closing power of the coil<br>• at 50 Hz<br>• at 60 Hz<br>apparent holding power of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz  | 0.85 1.1<br>37 VA<br>33 VA<br>0.8<br>0.75<br>5.7 VA<br>4.4 VA  |
| value of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>apparent pick-up power of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>inductive power factor with closing power of the coil<br>• at 50 Hz<br>• at 60 Hz<br>apparent holding power of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz  | 0.85 1.1<br>37 VA<br>33 VA<br>0.8<br>0.75<br>5.7 VA<br>4.4 VA<br>0.25  |
| value of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>apparent pick-up power of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>inductive power factor with closing power of the coil<br>• at 50 Hz<br>• at 60 Hz<br>apparent holding power of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>• at 60 Hz<br>• at 50 Hz<br>• at 60 Hz<br>• at 50 Hz<br>• at 50 Hz  | 0.85 1.1<br>37 VA<br>33 VA<br>0.8<br>0.75<br>5.7 VA<br>4.4 VA<br>0.25  |
| value of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>apparent pick-up power of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>inductive power factor with closing power of the coil<br>• at 50 Hz<br>• at 60 Hz<br>apparent holding power of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>inductive power factor with the holding power of the coil<br>• at 50 Hz<br>• at 60 Hz<br>inductive power factor with the holding power of the coil<br>• at 50 Hz<br>• at 60 Hz<br>• at 60 Hz<br>• at 60 Hz<br>• at 60 Hz  | 0.85 1.1<br>37 VA<br>33 VA<br>0.8<br>0.75<br>5.7 VA<br>4.4 VA<br>0.25<br>0.25  |
| value of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>apparent pick-up power of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>inductive power factor with closing power of the coil<br>• at 50 Hz<br>• at 60 Hz<br>apparent holding power of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>inductive power factor with the holding power of the coil<br>• at 50 Hz<br>• at 60 Hz<br>inductive power factor with the holding power of the coil<br>• at 50 Hz<br>• at 60 Hz<br>• at 60 Hz  | 0.85 1.1<br>37 VA<br>33 VA<br>0.8<br>0.75<br>5.7 VA<br>4.4 VA<br>0.25<br>0.25  |
| value of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>apparent pick-up power of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>inductive power factor with closing power of the coil<br>• at 50 Hz<br>• at 60 Hz<br>apparent holding power of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>inductive power factor with the holding power of the coil<br>• at 50 Hz<br>• at 60 Hz<br>inductive power factor with the holding power of the coil<br>• at 50 Hz<br>• at 60 Hz  | 0.85 1.1<br>37 VA<br>33 VA<br>0.8<br>0.75<br>5.7 VA<br>4.4 VA<br>0.25<br>0.25<br>9 35 ms   |
| value of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>apparent pick-up power of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>inductive power factor with closing power of the coil<br>• at 50 Hz<br>• at 60 Hz<br>apparent holding power of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>inductive power factor with the holding power of the<br>coil<br>• at 50 Hz<br>• at 60 Hz<br>• | 0.85 1.1<br>37 VA<br>33 VA<br>0.8<br>0.75<br>5.7 VA<br>4.4 VA<br>0.25<br>0.25<br>9 35 ms<br>7 13 ms                                      |
| value of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>apparent pick-up power of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>inductive power factor with closing power of the coil<br>• at 50 Hz<br>• at 60 Hz<br>apparent holding power of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>• at 60 Hz<br>inductive power factor with the holding power of the<br>coil<br>• at 50 Hz<br>• at 60 Hz<br>• | 0.85 1.1<br>37 VA<br>33 VA<br>0.8<br>0.75<br>5.7 VA<br>4.4 VA<br>0.25<br>0.25<br>9 35 ms<br>7 13 ms<br>10 15 ms                          |
| value of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>apparent pick-up power of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>inductive power factor with closing power of the coil<br>• at 50 Hz<br>• at 60 Hz<br>apparent holding power of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>inductive power factor with the holding power of the coil<br>• at 50 Hz<br>• at 60 Hz<br>inductive power factor with the holding power of the coil<br>• at 50 Hz<br>• at 60 Hz<br>• at 60 Hz<br>• at 60 Hz<br>• at AC<br>opening delay<br>• at AC<br>arcing time<br>control version of the switch operating mechanism<br>Auxiliary circuit  | 0.85 1.1<br>37 VA<br>33 VA<br>0.8<br>0.75<br>5.7 VA<br>4.4 VA<br>0.25<br>0.25<br>9 35 ms<br>7 13 ms<br>10 15 ms                          |
| value of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>apparent pick-up power of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>inductive power factor with closing power of the coil<br>• at 50 Hz<br>• at 60 Hz<br>apparent holding power of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>inductive power factor with the holding power of the<br>coil<br>• at 50 Hz<br>• at 60 Hz<br>inductive power factor with the holding power of the<br>coil<br>• at 50 Hz<br>• at 60 Hz<br>•       | 0.85 1.1<br>37 VA<br>33 VA<br>0.8<br>0.75<br>5.7 VA<br>4.4 VA<br>0.25<br>0.25<br>9 35 ms<br>7 13 ms<br>10 15 ms<br>Standard A1 - A2      |
| value of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>apparent pick-up power of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>inductive power factor with closing power of the coil<br>• at 50 Hz<br>• at 60 Hz<br>apparent holding power of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>inductive power factor with the holding power of the<br>coil<br>• at 50 Hz<br>• at 60 Hz<br>Closing delay<br>• at AC<br>opening delay<br>• at AC<br>arcing time<br>control version of the switch operating mechanism<br>Auxiliary circuit<br>number of NC contacts for auxiliary contacts<br>• attachable   | 0.85 1.1<br>37 VA<br>33 VA<br>0.8<br>0.75<br>5.7 VA<br>4.4 VA<br>0.25<br>0.25<br>9 35 ms<br>7 13 ms<br>10 15 ms                          |
| value of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>apparent pick-up power of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>inductive power factor with closing power of the coil<br>• at 50 Hz<br>• at 60 Hz<br>apparent holding power of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>inductive power factor with the holding power of the<br>coil<br>• at 50 Hz<br>• at 60 Hz<br>closing delay<br>• at AC<br>opening delay<br>• at AC<br>arcing time<br>control version of the switch operating mechanism<br>Auxiliary circuit<br>number of NC contacts for auxiliary contacts<br>• attachable<br>number of NO contacts for auxiliary contacts   | 0.85 1.1<br>37 VA<br>33 VA<br>0.8<br>0.75<br>5.7 VA<br>4.4 VA<br>0.25<br>0.25<br>9 35 ms<br>7 13 ms<br>10 15 ms<br>Standard A1 - A2<br>2 |
| value of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>apparent pick-up power of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>inductive power factor with closing power of the coil<br>• at 50 Hz<br>• at 60 Hz<br>apparent holding power of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>inductive power factor with the holding power of the<br>coil<br>• at 50 Hz<br>• at 60 Hz<br>closing delay<br>• at AC<br>opening delay<br>• at AC<br>arcing time<br>control version of the switch operating mechanism<br>Auxiliary circuit<br>number of NC contacts for auxiliary contacts<br>• attachable   | 0.85 1.1<br>37 VA<br>33 VA<br>0.8<br>0.75<br>5.7 VA<br>4.4 VA<br>0.25<br>0.25<br>9 35 ms<br>7 13 ms<br>10 15 ms<br>Standard A1 - A2      |
| value of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>apparent pick-up power of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>inductive power factor with closing power of the coil<br>• at 50 Hz<br>• at 60 Hz<br>apparent holding power of magnet coil at AC<br>• at 50 Hz<br>• at 60 Hz<br>inductive power factor with the holding power of the<br>coil<br>• at 50 Hz<br>• at 60 Hz<br>closing delay<br>• at AC<br>opening delay<br>• at AC<br>arcing time<br>control version of the switch operating mechanism<br>Auxiliary circuit<br>number of NC contacts for auxiliary contacts<br>• attachable<br>number of NO contacts for auxiliary contacts   | 0.85 1.1<br>37 VA<br>33 VA<br>0.8<br>0.75<br>5.7 VA<br>4.4 VA<br>0.25<br>0.25<br>9 35 ms<br>7 13 ms<br>10 15 ms<br>Standard A1 - A2<br>2 |

| design of the fuse link   |  |  |  |
|---|--|--|--|
| design of the fuse link   |  |  |  |
| <ul> <li>for short-circuit protection of the main circuit<br/>with type of coordination 1 required</li> </ul>   |  |  |  |
| — with type of coordination 1 required  | gG: 35 A (690 V, 100 kA)   |  |  |
| — with type of assignment 2 required  | gG: 20 A (690 V, 100 kA)   |  |  |
| <ul> <li>for short-circuit protection of the auxiliary switch<br/>required</li> </ul>   | gG: 10 A (690 V, 1 kA)   |  |  |
| nstallation/ mounting/ dimensions   |  |  |  |
| mounting position   | +/-180° rotation possible on vertical mounting surface; can be tilted                                  |  |  |
|   | forward and backward by +/- 22.5° on vertical mounting surface   |  |  |
| fastening method  | screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715                 |  |  |
| side-by-side mounting   | Yes  |  |  |
| height  | 70 mm  |  |  |
| width   | 45 mm  |  |  |
| depth   | 73 mm  |  |  |
| required spacing  |  |  |  |
| with side-by-side mounting  |  |  |  |
| — forwards  | 10 mm  |  |  |
| — upwards   | 10 mm  |  |  |
| — downwards   | 10 mm  |  |  |
| — at the side   | 0 mm   |  |  |
| <ul> <li>for grounded parts</li> </ul>  |  |  |  |
| — forwards  | 10 mm  |  |  |
| — upwards   | 10 mm  |  |  |
| — at the side   | 6 mm   |  |  |
| — downwards   | 10 mm  |  |  |
| <ul> <li>for live parts</li> </ul>  |  |  |  |
| — forwards  | 10 mm  |  |  |
| — upwards   | 10 mm  |  |  |
| — downwards   | 10 mm  |  |  |
| — at the side   | 6 mm   |  |  |
| Connections/ Terminals  |  |  |  |
| type of electrical connection   |  |  |  |
| <ul> <li>for main current circuit</li> </ul>  | spring-loaded terminals  |  |  |
| <ul> <li>for auxiliary and control circuit</li> </ul>   | spring-loaded terminals  |  |  |
| <ul> <li>at contactor for auxiliary contacts</li> </ul>   | Spring-type terminals  |  |  |
| <ul> <li>of magnet coil</li> </ul>  | Spring-type terminals  |  |  |
| type of connectable conductor cross-sections  |  |  |  |
| <ul> <li>for main contacts</li> </ul>   |  |  |  |
| — solid   | 2x (0.5 4 mm²)   |  |  |
| — solid or stranded   | 2x (0,5 4 mm²)   |  |  |
| <ul> <li>finely stranded with core end processing</li> </ul>  | 2x (0.5 2.5 mm²)   |  |  |
| <ul> <li>finely stranded without core end processing</li> </ul>   | 2x (0.5 2.5 mm²)   |  |  |
| <ul> <li>at AWG cables for main contacts</li> </ul>   | 2x (20 12)   |  |  |
| connectable conductor cross-section for main<br>contacts  |  |  |  |
| • solid   | 0.5 4 mm <sup>2</sup>  |  |  |
| <ul> <li>solid or stranded</li> </ul>   | 0.5 4 mm²  |  |  |
| • stranded  | 0.5 4 mm²  |  |  |
| <ul> <li>finely stranded with core end processing</li> </ul>  | 0.5 2.5 mm <sup>2</sup>  |  |  |
| <ul> <li>finely stranded without core end processing</li> </ul>   |  |  |  |
|   | 0.5 2.5 mm²  |  |  |
| connectable conductor cross-section for auxiliary contacts  | 0.5 2.5 mm²  |  |  |
| • solid or stranded   | 0.5 2.5 mm²<br>0.5 4 mm²   |  |  |
| contacts  | 0.5 2.5 mm²  |  |  |
| <ul> <li>contacts</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> <li>finely stranded without core end processing</li> </ul>  | 0.5 2.5 mm²<br>0.5 4 mm²   |  |  |
| <ul><li>contacts</li><li>solid or stranded</li><li>finely stranded with core end processing</li></ul>   | 0.5 2.5 mm <sup>2</sup><br>0.5 4 mm <sup>2</sup><br>0.5 2.5 mm <sup>2</sup>                            |  |  |
| <ul> <li>contacts</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> <li>finely stranded without core end processing</li> </ul>  | 0.5 2.5 mm <sup>2</sup><br>0.5 4 mm <sup>2</sup><br>0.5 2.5 mm <sup>2</sup>                            |  |  |
| contacts <ul> <li>solid or stranded</li> <li>finely stranded with core end processing</li> <li>finely stranded without core end processing</li> </ul> type of connectable conductor cross-sections                                  | 0.5 2.5 mm <sup>2</sup><br>0.5 4 mm <sup>2</sup><br>0.5 2.5 mm <sup>2</sup>                            |  |  |
| contacts         • solid or stranded         • finely stranded with core end processing         • finely stranded without core end processing         type of connectable conductor cross-sections         • for auxiliary contacts | 0.5 2.5 mm <sup>2</sup><br>0.5 4 mm <sup>2</sup><br>0.5 2.5 mm <sup>2</sup><br>0.5 2.5 mm <sup>2</sup> |  |  |


| <ul> <li>finely stranded without core end processing</li> <li>at AWG cables for auxiliary contacts</li> </ul>   | 2x (0.5 2.5 mm²)<br>2x (20 12)                           |                   |  |  |
|---|--|-------------------|--|--|
| AWG number as coded connectable conductor cross   | ()   |                   |  |  |
| section   |  |                   |  |  |
| <ul> <li>for main contacts</li> </ul>   | 20 12  |                   |  |  |
| <ul> <li>for auxiliary contacts</li> </ul>  | 20 12  |                   |  |  |
| Safety related data   |  |                   |  |  |
| product function  |  |                   |  |  |
| mirror contact according to IEC 60947-4-1   | Yes; with 3RH29  |                   |  |  |
| T1 value for proof test interval or service life according to IEC 61508   | 20 у   |                   |  |  |
| protection class IP on the front according to IEC<br>60529  | IP20   |                   |  |  |
| touch protection on the front according to IEC 60529  | finger-safe, for vertical contact from the front         |                   |  |  |
| Communication/ Protocol   |  |                   |  |  |
| product function bus communication  | No   |                   |  |  |
| Certificates/ approvals   |  |                   |  |  |
| General Product Approval  |  | EMC               |  |  |
|   |  |                   |  |  |
|   |  |                   |  |  |
| Functional<br>Safety/Safety of Declaration of Conformity<br>Machinery   | Test Certificates  | Marine / Shipping |  |  |
| Type Examination<br>CertificateCE<br>EG-Konf.UK<br>CH<br>CH   | <u>Special Test Certific- Type Test Cate ates/Test F</u> |                   |  |  |
| Marine / Shipping   |  |                   |  |  |
| BUREAU<br>VERITAS   | PRS RINA   | . RMRS            |  |  |
| other   |  |                   |  |  |
| Environmental Con-<br>firmations  | •  |                   |  |  |
|   |  |                   |  |  |
| Further information   |  |                   |  |  |
| Information- and Downloadcenter (Catalogs, Brochures,   | )  |                   |  |  |
| https://www.siemens.com/ic10<br>Industry Mall (Online ordering system)<br>https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2317-2AM20<br>Cax online generator<br>http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2317-2AM20<br>Service&Support (Manuals, Certificates, Characteristics, FAQs,)<br>https://support.industry.siemens.com/cs/uw/en/ps/3PT2317-2AM20 |  |                   |  |  |

Service&Support (Manuals, Certificates, Characteristics, FAQs,...) <u>https://support.industry.siemens.com/cs/ww/en/ps/3RT2317-2AM20</u> Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) <u>http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RT2317-2AM20&lang=en</u>

Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current

https://support.industry.siemens.com/cs/ww/en/ps/3RT2317-2AM20/char

Further characteristics (e.g. electrical endurance, switching frequency) http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2317-2AM20&objecttype=14&gridview=view1

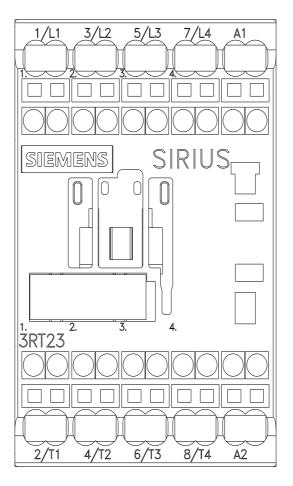

last modified:

3/18/2022 🖸