




Features

- Single-Device:
+12V Output, 7-16V Input
- 84% Efficiency
- 14-Pin Excalibur™ Package
- Output Current Limit
- Adjustable Output Voltage
- Adjustable Undervoltage Lockout
- Solderable Copper Case

Description

The PT5071 is a 1.5-ampere rated step-up/step-down Integrated Switching Regulator (ISR) that provides a tightly regulated 12V output voltage from a 7V to 16V variable input source. This high-performance ISR has applications in systems where the input voltage straddles the desired 12V output. The regulator has an adjustable output voltage and input start-up threshold, and a standby function for power conservation.

Standard Application

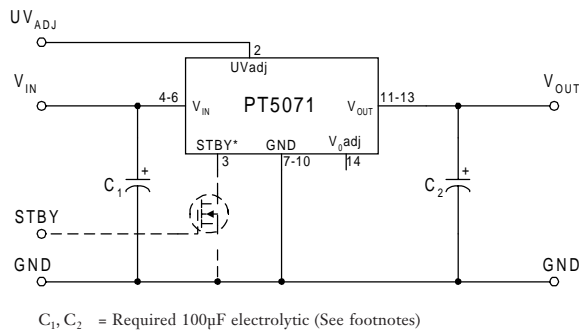

Pin-Out Information

Pin	Function
1	N/C
2	UVLO Adj
3	STBY*
4	V_{in}
5	V_{in}
6	V_{in}
7	GND
8	GND
9	GND
10	GND
11	V_{out}
12	V_{out}
13	V_{out}
14	V_{out} Adjust

Ordering Information

PT5071□ = +12 Volts

PT Series Suffix (PT1234X)

Case/Pin Configuration

Vertical Through-Hole	N
Horizontal Through-Hole	A
Horizontal Surface Mount	C

(For dimensions and PC board layout, see Package Styles 1360 and 1370.)

For Inhibit pin:
 Open = output enabled
 Ground = output disabled

Specifications




Characteristics ($T_a = 25^\circ\text{C}$ unless noted)	Symbols	Conditions	PT5071			Units
			Min	Typ	Max	
Output Current	I_o	Over V_{in} Range	0.1 (1)	—	1.5	A
Current Limit	I_{lim}	$V_{in} = 12\text{V}$	—	4.0	—	A
Input Voltage Range	V_{in}	$0.1\text{A} \leq I_o \leq I_{o,max}$	7.0	—	16.0	V
Output Voltage Tolerance	ΔV_o	$V_{in} = 12\text{V}, I_o = I_{o,max}$ $-40^\circ\text{C} \leq T_a \leq +85^\circ\text{C}$	—	± 1.0	—	%
Output Voltage Adjust Range	$V_{o,adj}$		10	—	15	V
Line Regulation	Reg_{line}	Over V_{in} Range, $I_o = I_{o,max}$	—	± 0.5	—	%
Load Regulation	Reg_{load}	$V_{in} = 12\text{V}, 0.1 \leq I_o \leq I_{o,max}$	—	± 0.5	—	%
V_o Ripple/Noise	V_n	$V_{in} = 12\text{V}, I_o = I_{o,max}$	—	± 2.0	± 3.0	%
Transient Response with $C_2 = 100\mu\text{F}$	t_{tr} V_{os}	Load step from 50% to 100% $I_{o,max}$, $V_{in} = 12\text{V}$ V_o over/undershoot	—	200 1.0	—	μSec % V_o
Efficiency	η	$V_{in} = 12\text{V}, V_o = 12\text{V}, I_o = 1.5\text{A}$	—	83	—	%
Switching Frequency	f_o	Over V_{in} Range $0.1\text{A} \leq I_o \leq I_{o,max}$	—	550	—	kHz
Absolute Maximum Operating Temperature Range	T_a	Over V_{in} range	-40 (2)	—	$+85$ (3)	$^\circ\text{C}$
Storage Temperature	T_s	—	-40	—	$+125$	$^\circ\text{C}$
Mechanical Shock		Per Mil-STD-883D, Method 2002.3, 1 msec, Half Sine, mounted to a fixture	—	TBD	—	G's
Mechanical Vibration		Per Mil-STD-883D, Method 2007.2, 20-2000 Hz, Soldered in a PC board	—	TBD	—	G's
Weight	—	—	—	25	—	grams

- Notes:**
1. The regulator will operate down to no load with reduced specifications.
 2. For operating temperatures below 0°C , it is recommended that tantalum capacitors be used at both the input and output.
 3. See SOA curves, or contact the factory for derating guidelines.




Input/Output Capacitors: The PT5071 regulator requires a 100 μF electrolytic capacitor at the input and output for proper operation in all applications. The ESR (equivalent series resistance) of both capacitors must be less than 250m Ω @100kHz. In addition, C_1 and C_2 must be rated to a minimum of 300mA rms ripple current.

1.5 Amp, 12V Step-Up/Step-Down Integrated Switching Regulator

PT5071 Performance, $V_o = 12V$ (See Note A)

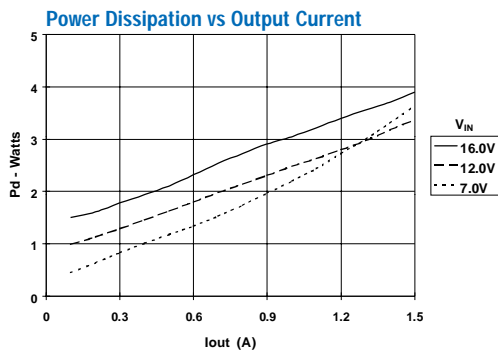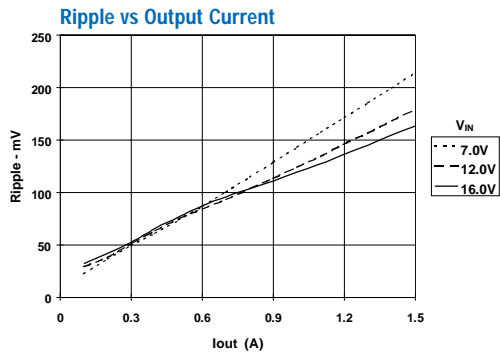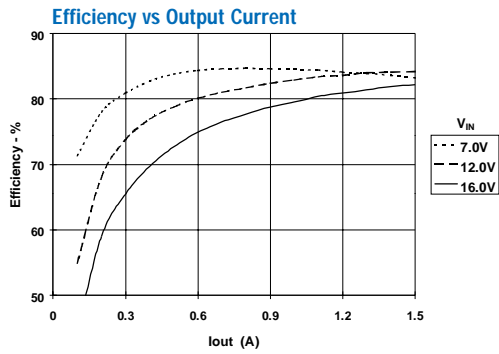

Safe Operating Area Curves (See Note B)

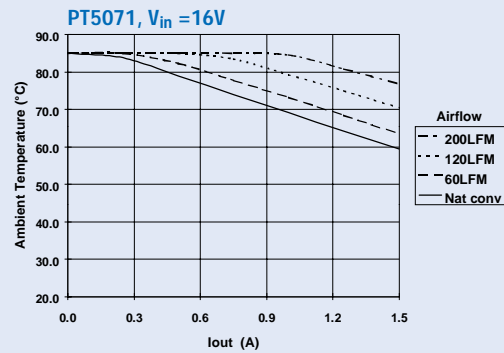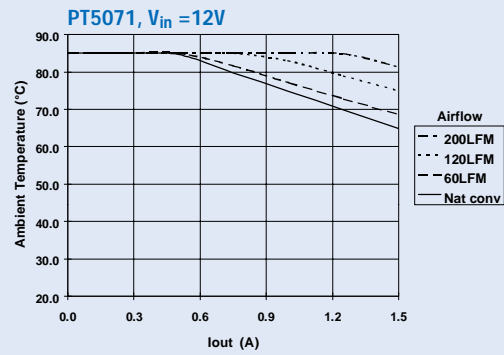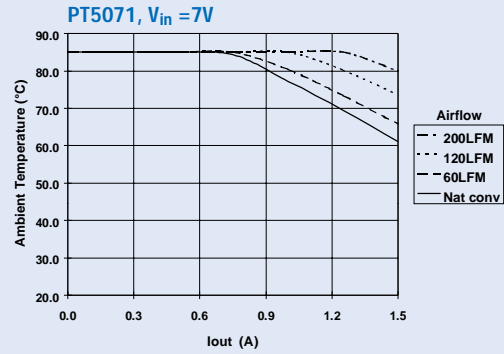

Note A: All Characteristic data in the above graphs has been developed from actual products tested at 25°C. This data is considered typical data for the ISR.
 Note B: SOA curves represent operating conditions at which internal components are at or below manufacturer's maximum rated operating temperatures.

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgment, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Customers are responsible for their applications using TI components.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, license, warranty or endorsement thereof.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations and notices. Representation or reproduction of this information with alteration voids all warranties provided for an associated TI product or service, is an unfair and deceptive business practice, and TI is not responsible nor liable for any such use.

Resale of TI's products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service, is an unfair and deceptive business practice, and TI is not responsible nor liable for any such use.

Also see: [Standard Terms and Conditions of Sale for Semiconductor Products](http://www.ti.com/sc/docs/stdterms.htm). www.ti.com/sc/docs/stdterms.htm

Mailing Address:

Texas Instruments
Post Office Box 655303
Dallas, Texas 75265