## SIEMENS

## Data sheet

## 3LD2064-0TB53-0US2



SENTRON, Switch disconnector 3LD, emergency switching-off switch, 3-pole, Iu: 16 A, operating power / at AC-23 A 400 V: 7.5 kW, Molded plastic encapsulation for inch cable gland, rotary operating mechanism, red/yellow

Model		
product brand name	SENTRON	
product designation	3LD Switch disconnector	
design of the product	EMERGENCY-STOP switch	
display version / for switch position indicator manual operation	1 ON - 0 OFF	
design of the actuating element	Short rotary knob	
design of handle	rotary operating mechanism, red/yellow	
type of the driving mechanism / motor drive	No	
General technical data		
number of poles	3	
number of poles / note	N + PE	
type of device	fixed mounting	
type of switch	Molded-plastic enclosure for inch threaded joint	
size of switch disconnector	1	
mechanical service life (switching cycles) / typical	100 000	
electrical endurance (switching cycles)		
• at AC-23 A / at 690 V	6 000	
I2t value / with closed switch / at 690 V / for combination switch + gG fuse / maximum	3 kA2.s	
let-through I2t value / with closed switch / at 440 V / for combination switch + gG fuse / maximum	2.5 kA2.s	
operating frequency / maximum	50 1/h	
Voltage		
insulation voltage / rated value	690 V	
surge voltage resistance / rated value	6 kV	
Protection class		
protection class IP	IP65	
degree of protection NEMA rating	1, 4X, 12	
protection class IP / on the front	IP65	
Dissipation		
power loss [W]		
<ul> <li>for rated value of the current / at AC / in hot operating state / per pole</li> </ul>	0.5 W	
<ul> <li>per conductor / typical</li> </ul>	1 W	
Current		
operational current		
• at 40 °C / rated value	16 A	
• at 45 °C / rated value	16 A	
<ul> <li>at 50 °C / rated value</li> </ul>	16 A	

• at 55 °C / rated value	16 A
<ul> <li>at AC / rated value</li> </ul>	16 A
<ul> <li>at AC-23 A / at 400 V / rated value</li> </ul>	16 A
<ul> <li>at AC-21 / at 690 V / rated value</li> </ul>	16 A
<ul> <li>at AC-21 A / at 240 V / rated value</li> </ul>	16 A
at AC-21 A / at 440 V / rated value	16 A
operational current / of upstream fuse / rated value	20 A
let-through current / with closed switch	
<ul> <li>at 440 V / for combination switch + gG fuse / maximum</li> </ul>	3 kA
<ul> <li>at 690 V / for combination switch + gG fuse / maximum permissible</li> </ul>	3 kA
Main circuit	
operating power	
<ul> <li>at AC-23 A / at 240 V / rated value</li> </ul>	4 kW
<ul> <li>at AC-23 A / at 400 V / rated value</li> </ul>	8 kW
<ul> <li>at AC-23 A / at 440 V / rated value</li> </ul>	7.5 kW
<ul> <li>at AC-23 A / at 690 V / rated value</li> </ul>	8 kW
<ul> <li>at AC-3 / at 240 V / rated value</li> </ul>	3 kW
• at AC-3 / at 400 V / rated value	6 kW
• at AC-3 / at 690 V / rated value	5.5 kW
operational current / rated value	16 A
Auxiliary circuit	
number of CO contacts / for auxiliary contacts	0
number of NC contacts / for auxiliary contacts	0
number of NO contacts / for auxiliary contacts	0
operating voltage / of auxiliary contacts / at AC / maximum	500 V
continuous current / of the auxiliary contact / rated value	10 A
insulation voltage / of the auxiliary switch / rated value	500 V
Suitability	
suitability for use	
main switch	Yes
	Tes
switch disconnector	Yes
<ul><li>switch disconnector</li><li>EMERGENCY OFF switch</li></ul>	Yes Yes
<ul><li>switch disconnector</li><li>EMERGENCY OFF switch</li><li>safety switch</li></ul>	Yes Yes
<ul> <li>switch disconnector</li> <li>EMERGENCY OFF switch</li> <li>safety switch</li> <li>maintenance/repair switch</li> </ul>	Yes Yes
<ul> <li>switch disconnector</li> <li>EMERGENCY OFF switch</li> <li>safety switch</li> <li>maintenance/repair switch</li> </ul> Appearance	Yes Yes Yes
switch disconnector     EMERGENCY OFF switch     safety switch     maintenance/repair switch Appearance color / of the actuating element	Yes Yes
<ul> <li>switch disconnector</li> <li>EMERGENCY OFF switch</li> <li>safety switch</li> <li>maintenance/repair switch</li> </ul> Appearance	Yes Yes Yes
switch disconnector     EMERGENCY OFF switch     safety switch     maintenance/repair switch  Appearance color / of the actuating element  Product details product feature	Yes Yes Yes
switch disconnector     EMERGENCY OFF switch     safety switch     maintenance/repair switch  Appearance color / of the actuating element  Product details	Yes Yes Yes Yes Yes
switch disconnector     EMERGENCY OFF switch     safety switch     maintenance/repair switch      Appearance     color / of the actuating element      Product details      product feature         can be locked into OFF position     number of bracket locks / maximum	Yes Yes Yes red Yes 3
<ul> <li>switch disconnector</li> <li>EMERGENCY OFF switch</li> <li>safety switch</li> <li>maintenance/repair switch</li> </ul> Appearance <ul> <li>color / of the actuating element Product details <ul> <li>product feature</li> <li>can be locked into OFF position</li> <li>number of bracket locks / maximum</li> <li>hasp thickness / of the bracket locks / minimum</li> </ul></li></ul>	Yes Yes Yes Yes Yes
<ul> <li>switch disconnector</li> <li>EMERGENCY OFF switch</li> <li>safety switch</li> <li>maintenance/repair switch</li> </ul> Appearance <ul> <li>color / of the actuating element Product details <ul> <li>product feature</li> <li>can be locked into OFF position</li> <li>number of bracket locks / maximum</li> <li>hasp thickness / of the bracket locks / maximum</li> </ul></li></ul>	Yes Yes Yes red Yes 3
<ul> <li>switch disconnector</li> <li>EMERGENCY OFF switch</li> <li>safety switch</li> <li>maintenance/repair switch</li> </ul> Appearance <ul> <li>color / of the actuating element Product details <ul> <li>product feature</li> <li>can be locked into OFF position</li> <li>number of bracket locks / maximum</li> <li>hasp thickness / of the bracket locks / maximum</li> <li>hasp thickness / of the bracket locks / maximum</li> <li>product extension / optional</li> </ul></li></ul>	Yes Yes Yes Yes Yes Yes 3 4 mm
<ul> <li>switch disconnector</li> <li>EMERGENCY OFF switch</li> <li>safety switch</li> <li>maintenance/repair switch</li> </ul> Appearance <ul> <li>color / of the actuating element Product details <ul> <li>product feature</li> <li>can be locked into OFF position</li> <li>number of bracket locks / maximum</li> <li>hasp thickness / of the bracket locks / maximum</li> <li>hasp thickness / of the bracket locks / maximum</li> <li>product extension / optional</li> <li>motor drive</li> </ul></li></ul>	Yes Yes Yes Yes Yes Yes 3 4 mm
<ul> <li>switch disconnector</li> <li>EMERGENCY OFF switch</li> <li>safety switch</li> <li>maintenance/repair switch</li> </ul> Appearance <ul> <li>color / of the actuating element Product details <ul> <li>product feature</li> <li>can be locked into OFF position</li> <li>number of bracket locks / maximum</li> <li>hasp thickness / of the bracket locks / minimum</li> <li>hasp thickness / of the bracket locks / maximum</li> <li>product extension / optional</li> <li>motor drive</li> <li>voltage trigger</li> </ul></li></ul>	Yes Yes Yes Yes Yes 3 4 mm 8 mm
<ul> <li>switch disconnector</li> <li>EMERGENCY OFF switch</li> <li>safety switch</li> <li>maintenance/repair switch</li> </ul> Appearance <ul> <li>color / of the actuating element Product details <ul> <li>product feature</li> <li>can be locked into OFF position</li> <li>number of bracket locks / maximum</li> <li>hasp thickness / of the bracket locks / maximum</li> <li>hasp thickness / of the bracket locks / maximum</li> <li>product extension / optional</li> <li>motor drive</li> </ul></li></ul>	Yes Yes Yes Yes Yes 3 4 mm 8 mm No
<ul> <li>switch disconnector</li> <li>EMERGENCY OFF switch</li> <li>safety switch</li> <li>maintenance/repair switch</li> </ul> Appearance <ul> <li>color / of the actuating element Product details <ul> <li>product feature</li> <li>can be locked into OFF position</li> <li>number of bracket locks / maximum</li> <li>hasp thickness / of the bracket locks / minimum</li> <li>hasp thickness / of the bracket locks / maximum</li> <li>product extension / optional</li> <li>motor drive</li> <li>voltage trigger</li> </ul></li></ul>	Yes Yes Yes Yes Yes 3 4 mm 8 mm No
<ul> <li>switch disconnector</li> <li>EMERGENCY OFF switch</li> <li>safety switch</li> <li>maintenance/repair switch</li> </ul> Appearance <ul> <li>color / of the actuating element Product details <ul> <li>product feature</li> <li>can be locked into OFF position</li> <li>number of bracket locks / maximum</li> <li>hasp thickness / of the bracket locks / minimum</li> <li>hasp thickness / of the bracket locks / maximum</li> <li>product extension / optional</li> <li>motor drive</li> <li>voltage trigger</li> </ul></li></ul>	Yes Yes Yes Yes Yes 3 4 mm 8 mm No
<ul> <li>switch disconnector</li> <li>EMERGENCY OFF switch</li> <li>safety switch</li> <li>maintenance/repair switch</li> </ul> Appearance <ul> <li>color / of the actuating element Product details <ul> <li>product feature</li> <li>can be locked into OFF position</li> <li>number of bracket locks / maximum</li> <li>hasp thickness / of the bracket locks / minimum</li> <li>hasp thickness / of the bracket locks / maximum</li> <li>product extension / optional</li> <li>motor drive</li> <li>voltage trigger</li> </ul> Short circuit <ul> <li>conditional short-circuit current / with line-side fuse protection</li> </ul></li></ul>	Yes Yes Yes Yes red Yes 3 4 mm 8 mm No No
<ul> <li>switch disconnector</li> <li>EMERGENCY OFF switch</li> <li>safety switch</li> <li>maintenance/repair switch</li> </ul> Appearance <ul> <li>color / of the actuating element Product details <ul> <li>product feature</li> <li>can be locked into OFF position</li> <li>number of bracket locks / maximum</li> <li>hasp thickness / of the bracket locks / minimum</li> <li>hasp thickness / of the bracket locks / maximum</li> <li>product extension / optional</li> <li>motor drive</li> <li>voltage trigger</li> </ul> Short circuit <ul> <li>conditional short-circuit current / with line-side fuse protection</li> <li>at 690 V / by gG fuse / rated value</li> </ul></li></ul>	Yes Yes Yes Yes red Yes 3 4 mm 8 mm No No
<ul> <li>switch disconnector</li> <li>EMERGENCY OFF switch</li> <li>safety switch</li> <li>maintenance/repair switch</li> </ul> Appearance <ul> <li>color / of the actuating element Product details <ul> <li>product feature</li> <li>can be locked into OFF position</li> <li>number of bracket locks / maximum</li> <li>hasp thickness / of the bracket locks / minimum</li> <li>hasp thickness / of the bracket locks / maximum</li> <li>product extension / optional</li> <li>motor drive</li> <li>voltage trigger</li> </ul> Short circuit <ul> <li>conditional short-circuit current / with line-side fuse protection</li> <li>at 690 V / by gG fuse / rated value</li> </ul> according UL <ul> <li>operational current / at AC / according to UL 508/UL</li> </ul></li></ul>	Yes Yes Yes Yes Yes 3 4 mm 8 mm No No No
<ul> <li>switch disconnector</li> <li>EMERGENCY OFF switch</li> <li>safety switch</li> <li>maintenance/repair switch</li> </ul> Appearance <ul> <li>color / of the actuating element Product details <ul> <li>product feature</li> <li>can be locked into OFF position</li> <li>number of bracket locks / maximum</li> <li>hasp thickness / of the bracket locks / minimum</li> <li>hasp thickness / of the bracket locks / maximum</li> <li>product extension / optional</li> <li>motor drive</li> <li>voltage trigger</li> </ul> Short circuit <ul> <li>conditional short-circuit current / with line-side fuse protection</li> <li>at 690 V / by gG fuse / rated value</li> </ul> according UL <ul> <li>operational current / at AC / according to UL 508/UL 60947-4-1 / rated value</li> <li>operating voltage / at AC / at 50/60 Hz / according to UL</li> </ul></li></ul>	Yes Yes Yes Yes 7es 7es 7es 7es 7es 7es 7es 7es 7es 7
<ul> <li>switch disconnector</li> <li>EMERGENCY OFF switch</li> <li>safety switch</li> <li>maintenance/repair switch</li> </ul> Appearance <ul> <li>color / of the actuating element Product details <ul> <li>product feature</li> <li>can be locked into OFF position</li> <li>number of bracket locks / maximum</li> <li>hasp thickness / of the bracket locks / minimum</li> <li>hasp thickness / of the bracket locks / maximum</li> <li>product extension / optional</li> <li>motor drive</li> <li>voltage trigger</li> </ul> Short circuit <ul> <li>conditional short-circuit current / with line-side fuse protection</li> <li>at 690 V / by gG fuse / rated value</li> </ul> according UL <ul> <li>operational current / at AC / according to UL 508/UL 60947-4-1 / rated value</li> <li>active power [hp] / at AC / at 480 V / according to UL</li> </ul></li></ul>	Yes Yes Yes Yes 7 Yes 3 4 mm 8 mm No No No No No
<ul> <li>switch disconnector</li> <li>EMERGENCY OFF switch</li> <li>safety switch</li> <li>maintenance/repair switch</li> </ul> Appearance <ul> <li>color / of the actuating element Product details <ul> <li>product feature</li> <li>can be locked into OFF position</li> <li>number of bracket locks / maximum</li> <li>hasp thickness / of the bracket locks / minimum</li> <li>hasp thickness / of the bracket locks / maximum</li> <li>product extension / optional</li> <li>motor drive</li> <li>voltage trigger</li> </ul> Short circuit <ul> <li>conditional short-circuit current / with line-side fuse protection</li> <li>at 690 V / by gG fuse / rated value</li> </ul> according UL <ul> <li>operational current / at AC / according to UL 508/UL 60947-4-1 / rated value</li> <li>active power [hp] / at AC / at 600 V / according to UL 508/UL 60947-4-1 / rated value</li> </ul></li></ul>	Yes Yes Yes Ted Yes 3 4 mm 8 mm No No No No No 7.5

to UL 508/UL 60947-4-1	
continuous current / of upstream fuse / according to UL /	50 A
rated value	
type of fuse / according to UL	RK5
Number	
number of connectable NC contacts / for auxiliary contacts / attachable / maximum	3
number of connectable NO contacts / for auxiliary contacts / attachable / maximum	5
number of connectable CO contacts / for auxiliary contacts / attachable / maximum	0
Connections	
AWG number / as coded connectable conductor cross section / solid	
• maximum	10
• minimum	18
type of connectable conductor cross-sections / for copper	
conductor	
• solid	1x (16mm <sup>2</sup> )
<ul> <li>finely stranded / with core end processing</li> </ul>	1x (14mm <sup>2</sup> )
stranded     type of connectable conductor grace continue (for	1x (16mm²)
type of connectable conductor cross-sections / for auxiliary contacts	
• solid	lateral auxiliary switch 2x (0,75 2,5mm <sup>2</sup> ), 1x 4mm <sup>2</sup> ; front auxiliary switch 1x (0,75 2,5mm <sup>2</sup> )
• finely stranded / with core end processing	lateral auxiliary switch 2x (0,75 1,5mm <sup>2</sup> ), 1x 2,5mm <sup>2</sup> ; front auxiliary switch 1x 2,5mm <sup>2</sup>
• stranded	lateral auxiliary switch 2x (0,75 2,5mm <sup>2</sup> ), 1x 4mm <sup>2</sup> ; front auxiliary switch 1x (0,75 2,5mm <sup>2</sup> )
type of electrical connection	
<ul> <li>for main current circuit</li> </ul>	box terminal
<ul> <li>for auxiliary contacts</li> </ul>	connection terminals
Requirements	
design of the fuse link	
<ul> <li>for short-circuit protection of the main circuit / required</li> </ul>	fuse gL/gG: 20 A
<ul> <li>for short-circuit protection of the auxiliary switch / required</li> </ul>	fuse gL/gG: 10 A
Mechanical Design	
height	164 mm
width	100 mm
depth	118 mm
fastening method	Complete unit in enclosure
fastening method	
<ul> <li>4-hole front mounting</li> </ul>	No
<ul> <li>front mounting with central attachment</li> </ul>	Yes
rail mounting	No
net weight	474 g
Environmental conditions	
ambient temperature / during operation	
• minimum	-25 °C
maximum	55 °C
ambient temperature / during storage / minimum	-25 °C
General Product Approval	
Confirmation CSA	Miscellaneous UL VDE
General Product Declaration of Conformity	Test Certificates Marine / Shipping

Subject to change without notice © Copyright Siemens Approval



UK CA

CE EG-Konf. <u>Miscellaneous</u>

Special Test Certificate

-Ð

ø4.5



other

**Miscellaneous** 

Environmental Confirmations


## Further information


Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/lowvoltage/catalogs Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3LD2064-0TB53-0US2 Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3LD2064-0TB53-0US2 Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax\_en.aspx?mlfb=3LD2064-0TB53-0US2 CAx-Online-Generator


http://www.siemens.com/cax


Tender specifications

http://www.siemens.com/specifications







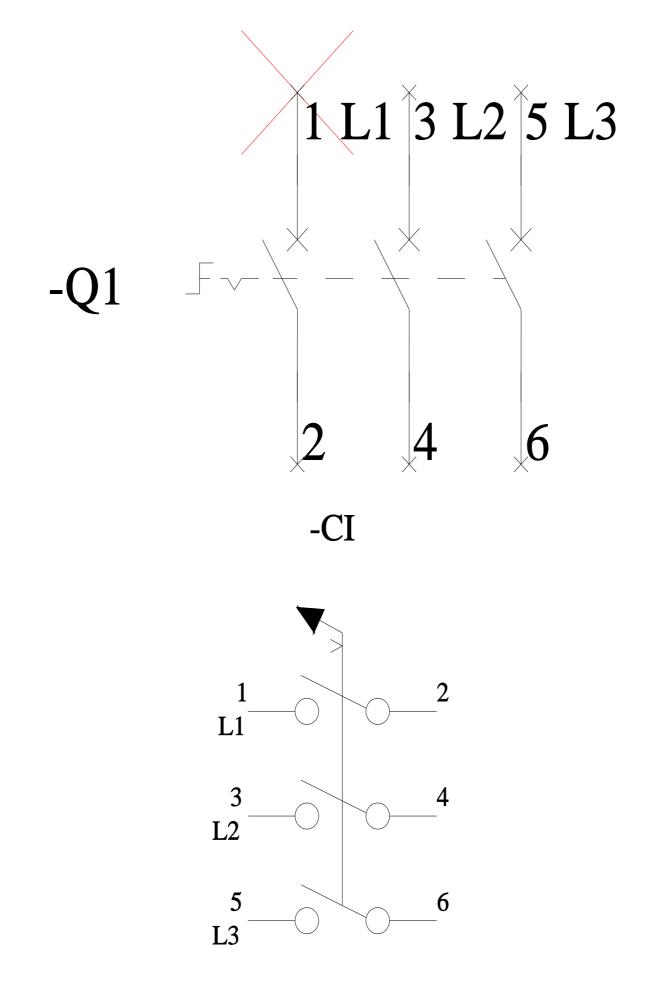

Ø