

Product Specification

Universal AC Input with PFC,
48VDC or 24/28VDC Input

Key Product Features

- Up to 650W
- 6U Cabinet
- Environmentally Rugged
- High Current 3.3V and 5V Outputs
- Up to 80A
- Accurate Current Sharing
- Internal Oring FETs for redundant applications
- PICMG 2.11 Compliant

Safety and EMC

- UL/cUL 60950-1, IEC/EN60950-1 Approved (AC Input and 48 VDC Input)
- EN55022 Level B Emissions

CPCI-6U Series

350–650 Watt Compact PCI Power Supply



Description

The CPCI 6U Series of power supplies offer industry leading performance with up to 650 Watts in a 6U package. A full range of AC Input, 24/28VDC Input and 48VDC Input products is available and all products are compliant to the PICMG 2.11 power interface specification. These CPCI products are ruggedized and excel in defense and harsh industrial applications.

Ratings

Input Voltage Range—AC Input	90-264 VAC, 47-63Hz
Input Voltage Range—48VDC Input	36-72 VDC
Input Voltage Range—24/28VDC Input	18-36 VDC
Operating Temperature Range	-5°C to +55°C Full Power with 400 LFM
Current Sharing Accuracy (V1 and V2)	10% Sharing – up to 6 units

Model Selection

Model	Input	Output Power	V1 Output	V2 Output	V3 Output	V4 Output
CPCI-AC-6U-400	90-264VAC	400W	+5V/50A	+3.3V/80A	+12V/7.5A	-12V/1.5A
CPCI-AC-6U-500	90-264VAC	500W	+5V/65A	+3.3V/80A	+12V/12A	-12V/1.5A
CPCI-AC-6U-600	90-264VAC	600W	+5V/70A	+3.3V/70A	+12V/7A	-12V/1.5A
CPCI-AC-6U-650	90-264VAC	650W	+5V/80A	+3.3V/70A	+12V/7A	-12V/1.5A
CPCI-DC-6U-350/24	18-36VDC	350W	+5V/50A	+3.3V/60A	+12V/7A	-12V/1.5A
CPCI-DC-6U-400/24	20-36VDC	400W	+5V/50A	+3.3V/60A	+12V/7A	-12V/1.5A
CPCI-DC-6U-400/48	36-72VDC	400W	+5V/50A	+3.3V/80A	+12V/7.5A	-12V/1.5A
CPCI-DC-6U-500/48	36-72VDC	500W	+5V/65A	+3.3V/80A	+12V/12A	-12V/1.5A
CPCI-DC-6U-600/48	36-72VDC	600W	+5V/70A	+3.3V/70A	+12V/7A	-12V/1.5A
CPCI-DC-6U-650/48	36-72VDC	650W	+5V/80A	+3.3V/70A	+12V/7A	-12V/1.5A

Electrical Specifications

Input

AC Models	90–264 VAC, 47–63 Hz
Power Factor	>0.90/0.95 typical @ 110/220 VAC (full load)
Hold-up Time	16 ms minimum (full load)
Inrush Current	<35/65 A @ 110/230 VAC
48VDC Input Models	36–72 VDC Input range
24VDC Input Models	18–36 VDC Input range

Output

Line Regulation	± 0.5% for minimum to maximum voltage input
Transient Response	>0.90/0.95 typical @ 110/220 VAC (full load)
Over-Voltage Protection	110–125% of V1/V2/V3 (latched shutdown)
Overload Protection	V1 and V2: 125% / V3 and V4: 200% (400W & 500W auto recovery)(600W & 650W recycle AC input power to reset.)
Load Regulation	V1 and V2: ±1% maximum, V3 and V4: ±5% maximum
Min Load Requirement	None
Turn-On Delay	2 seconds maximum
Initial Setting Accuracy	V1 and V2 ±1% @ 50% load, V3 and V4 ±2% @ 50% load
Ripple/Noise (20MHz BW)	V1 and V2: 60 mV, V3 and V4: 120mV (20M Hz bandwidth)

EMC and Safety Certifications

Electromagnetic Compatibility

Electrostatic Discharge	EN61000-4-2, ±KV Contact / ±8KV Air Discharge
Radiated Susceptibility	EN61000-4-3, 26-1000MHz, 10V/M, 80% AM
EFT / Bursts	EN61000-4-4, ±2KV
Surges	EN61000-4-5, ±2KV Line-Earth, ±1KV Line-Line
Conducted Immunity	EN61000-4-6, 0.15-800MHz, 10V, 80% AM
Voltage Dips	EN61000-4-11, 30% Dip for 10ms, 60% Dip for 100ms
Voltage Interruptions	EN61000-4-11, 95% Reduction, 5s
Fluctuations & Flicker	EN61000-3-3

Safety & Emissions

Safety Approvals	UL/cUL 60950-1, IEC/EN 60950-1
Emissions	EN 55022 Level-B

Environmental Specifications


Operating Temperature Range	-5°C to 55°C (23°F to 131°F); De-rate of 2.5% per 1°C to 70°C (34°F to 158°F)
Storage Temperature Range	-40°C to 85°C (-40°F to 185°F)
Cooling	400W and 500W models: 250LFM airflow required for full power at 55°C 600W and 650W models: 400LFM airflow required for full power at 55°C
Humidity	Up to 95% RH non-condensing
Shock & Vibration	Storage: EN 300 019-2-1 class 1.2. Transportation: EN 300 019-2-2 class 2.3. Use: EN 300 019-2-3 class 3.3.
MTBF	>400,000 hours per Belcore 332 issue 6

Status/Control


Remote Inhibit	Inhibited with GND or TTL“0” = Off
DC Fail	Open collector—Active Low signal. Indicates one or more outputs below 90% of specified rating
Over Temperature Warning	Open collector Active Low nominally 10 deg C before shut down.
Remote Sense	Available V1 and V2. Total voltage compensation up to 300 mV drop.
Current Share	Single wire (V1 and V2) ±10% up to 6 parallel units.
Front Panel Green LED	Outputs OK
Front Panel Red LED	Fault condition

Output Power Derating


**Output Power Derating CPCI-XX-6U-650
400 LFM Airflow**

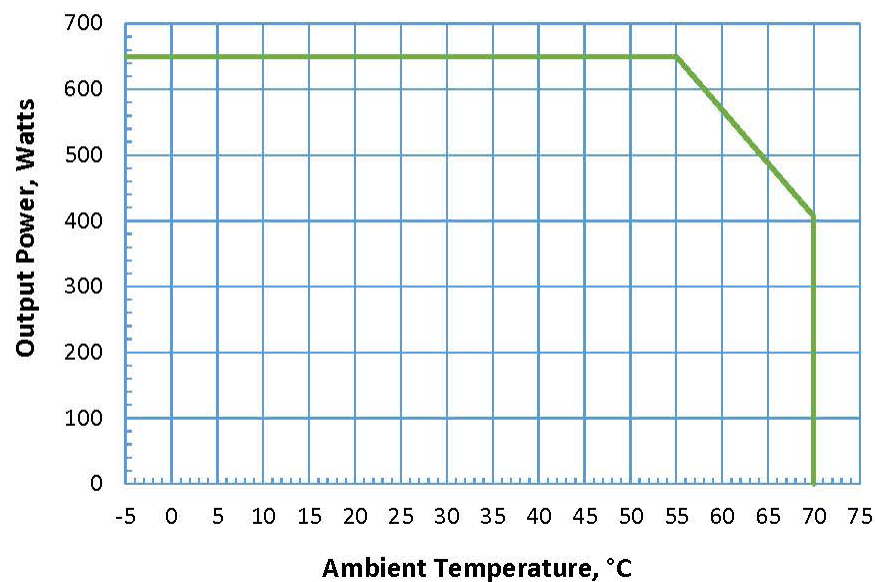


**Output Power Derating CPCI-XX-6U-600
400 LFM Airflow**

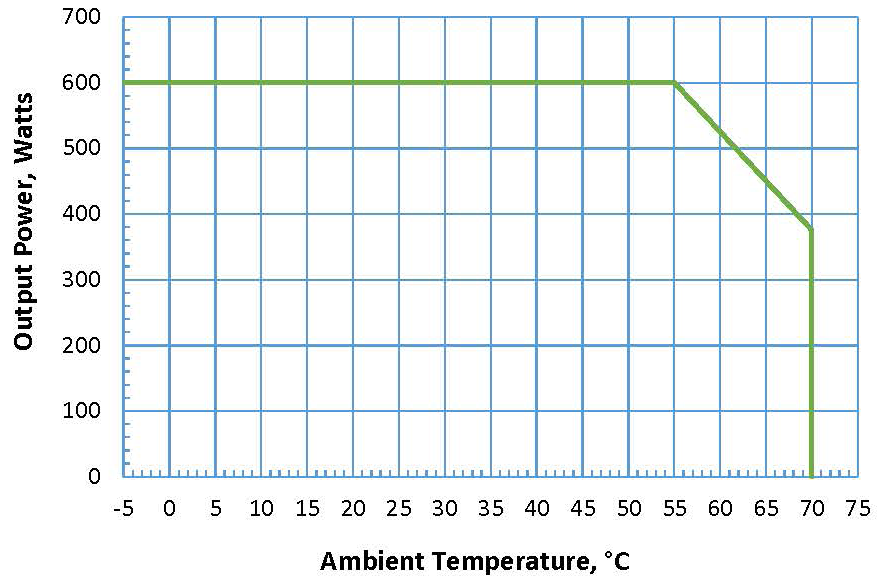


**Output Power Derating CPCI-XX-6U-500
250 LFM Airflow**

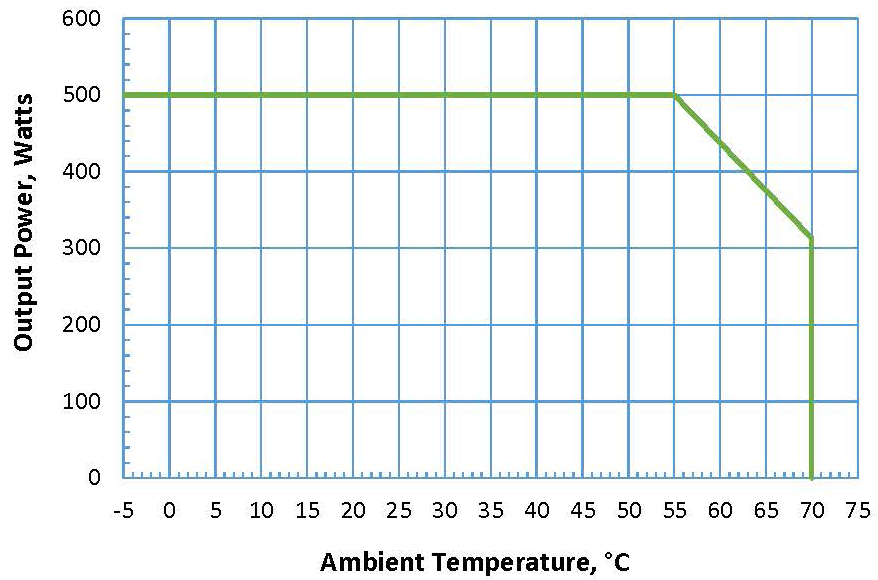

**Output Power Derating CPCI-XX-6U-400
250 LFM Airflow**

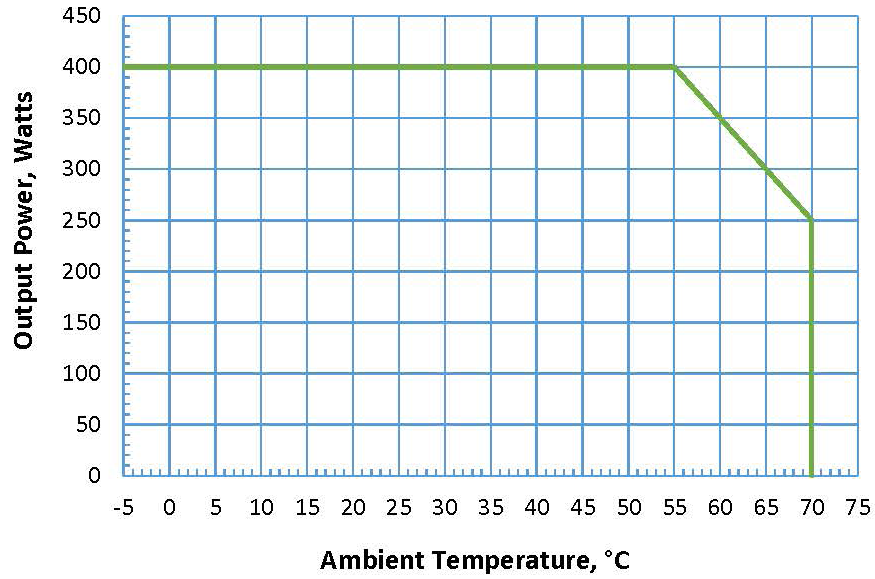

Mechanical Outline

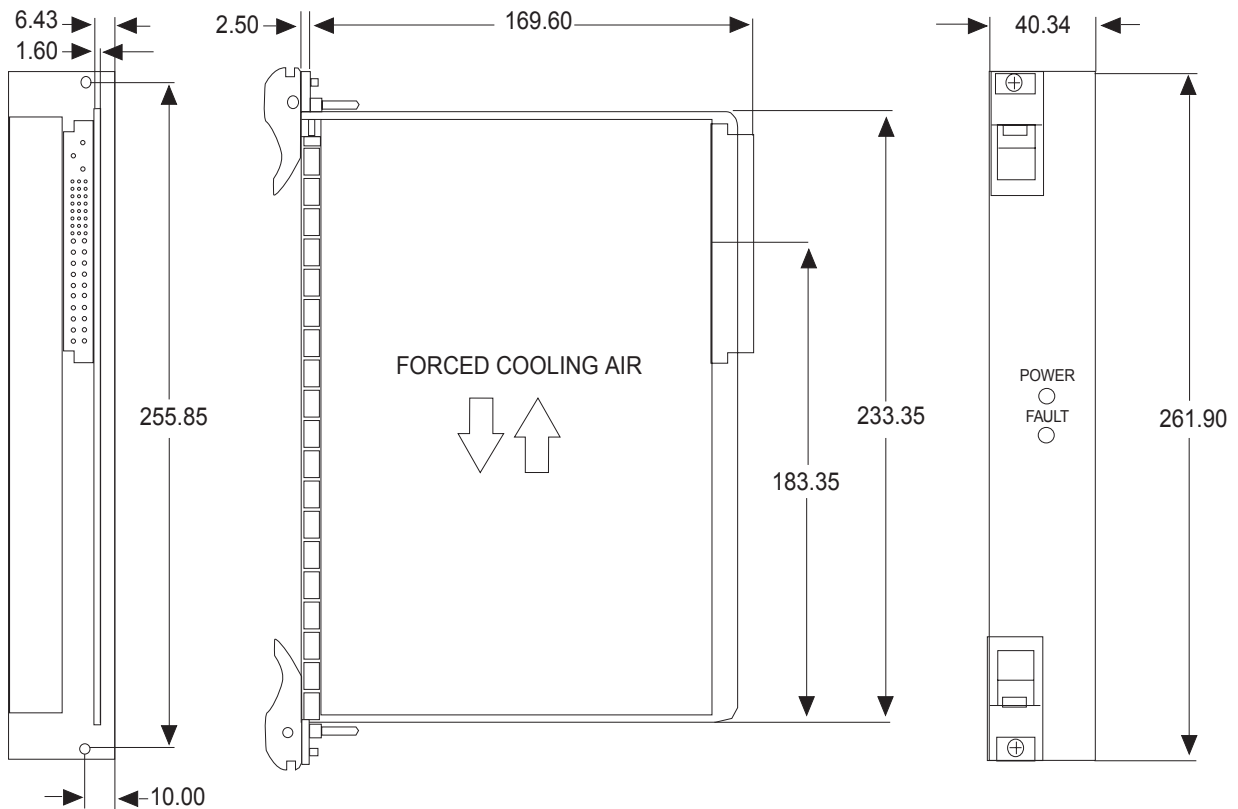

OUTPUT CONNECTOR - Positronic-PCIH47M400A1/AA
PIN ASSIGNMENT

Pin	Pin Type	Signal Name.	Description
1-4	Normal	V1	V1 Output
5-12	Normal	RTN	V1 and V2 Return
13-18	Normal	V2	V2 Output
19	Normal	RTN	V3 Return
20	Normal	V3	V3 Output
21	Normal	V4	V4 Output
22	Normal	RTN	Signal Return
23	Normal	RTN	Signal Return
24	Normal	RTN	V4 Return
25	Normal	GA-0	Geographic ADD-0 (option)
26	Normal	Reverse	Reverse
27	Short	EN#	Enable
28	Normal	GA-1	Geographic ADD-1 (option)
29	Normal	NC	Not Connected
30	Normal	V1 Sense	V1 Remote Sense
31	Normal	GA-2	Geographic ADD-2 (option)
32	Normal	NC	Not Connected
33	Normal	V2 Sense	V2 Remote Sense
34	Normal	S RTN	Sense Return
35	Normal	V1 Share	V1 Current Share
36	Normal	NC	Not Connected
37	Normal	IPMB_SCL	System Manager Bus (option)
38	Normal	DEG#	Degrade Signal
39	Normal	INH#	Open – ON Low - OFF
40	Normal	IPMB_SDA	System Manager Bus (option)
41	Normal	V2 Share	V2 Current Share
42	Normal	FAL#	Fail Signal
43	Normal	IPMB_PWR	Power–System Manager (option)
44	Normal	NC	Not Connected
45	Long	Chassis GND	Chassis GND
46	Long	Neutral	DC input Neutral
47	Long	Line	DC Input Line