SIEMENS

Data sheet

3RA6120-0CB30



SIRIUS Compact load feeder DOL starter 690 V 24 V AC/DC 50...60 Hz 1...4 A IP20 Connection main circuit: plug-in, without terminals Connection auxiliary circuit: plug-in, without terminals

product brand name	SIRIUS
product designation	compact starter
design of the product	direct starter
product type designation	3RA61
General technical data	
product function control circuit interface to parallel wiring	Yes
product extension auxiliary switch	Yes
power loss [W] for rated value of the current at AC in hot operating state	1 W
• per pole	0.33 W
power loss [W] for rated value of the current without load current share typical	2.9 W
insulation voltage rated value	690 V
degree of pollution	3
surge voltage resistance rated value	6 000 V
maximum permissible voltage for safe isolation	
 between main and auxiliary circuit 	400 V
 between auxiliary and auxiliary circuit 	250 V
 between control and auxiliary circuit 	300 V
degree of protection NEMA rating	other
shock resistance	a=60 m/s2 (6g) with 10 ms per 3 shocks in all axes
vibration resistance	f= 4 5.8 Hz, d= 15 mm; f= 5.8 500 Hz, a= 20 m/s²; 10 cycles
mechanical service life (switching cycles)	
 of the main contacts typical 	10 000 000
 of auxiliary contacts typical 	10 000 000
 of the signaling contacts typical 	10 000 000
electrical endurance (switching cycles) of auxiliary contacts	
 at DC-13 at 6 A at 24 V typical 	30 000
 at AC-15 at 6 A at 230 V typical 	200 000
type of assignment	continous operation according to IEC 60947-6-2
reference code acc. to IEC 81346-2	Q
Substance Prohibitance (Date)	01.05.2012 00:00:00
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
 ambient temperature during operation 	-20 +60 °C
 ambient temperature during storage 	-55 +80 °C

relative humidity during operation	10 90 %	
Main circuit		
number of poles for main current circuit	3	
	3 14A	
adjustable current response value current of the current-dependent overload release	14A	
formula for making capacity limit current	12 x le	
formula for breaking capacity limit current	10 x le	
yielded mechanical performance for 4-pole AC motor		
 at 400 V rated value 	1.5 kW	
• at 500 V rated value	2.2 kW	
 at 690 V rated value 	3 kW	
 operating voltage at AC-3 rated value maximum 	690 V	
operational current		
 at AC at 400 V rated value 	4 A	
• at AC-43		
— at 400 V rated value	3.6 A	
— at 500 V rated value	3.9 A	
— at 690 V rated value	3.8 A	
operating power		
• at AC-3 at 400 V rated value	1 500 W	
• at AC-43		
— at 400 V rated value	1 500 W	
— at 500 V rated value	2 200 W	
— at 690 V rated value	3 000 W	
no-load switching frequency	3 600 1/h	
operating frequency		
• at AC-41 acc. to IEC 60947-6-2 maximum	750 1/h	
• at AC-43 acc. to IEC 60947-6-2 maximum	250 1/h	
Control circuit/ Control		
type of voltage	AC/DC	
type of voltage control supply voltage 1 at AC	AC/DC	
control supply voltage 1 at AC		
• at 50 Hz rated value	24 V	
 control supply voltage 1 at AC at 50 Hz rated value at 60 Hz rated value 		
• at 50 Hz rated value	24 V 24 V	
control supply voltage 1 at AC • at 50 Hz rated value • at 60 Hz rated value control supply voltage frequency • 1 rated value	24 V 24 V 50 Hz	
control supply voltage 1 at AC • at 50 Hz rated value • at 60 Hz rated value control supply voltage frequency • 1 rated value • 2 rated value	24 V 24 V	
control supply voltage 1 at AC • at 50 Hz rated value • at 60 Hz rated value control supply voltage frequency • 1 rated value • 2 rated value control supply voltage 1	24 V 24 V 50 Hz 60 Hz	
control supply voltage 1 at AC • at 50 Hz rated value • at 60 Hz rated value control supply voltage frequency • 1 rated value • 2 rated value control supply voltage 1 • at DC rated value	24 V 24 V 50 Hz	
control supply voltage 1 at AC • at 50 Hz rated value • at 60 Hz rated value control supply voltage frequency • 1 rated value • 2 rated value control supply voltage 1 • at DC rated value	24 V 24 V 50 Hz 60 Hz 24 V	
control supply voltage 1 at AC • at 50 Hz rated value • at 60 Hz rated value control supply voltage frequency • 1 rated value • 2 rated value control supply voltage 1 • at DC rated value holding power • at AC maximum	24 V 24 V 50 Hz 60 Hz 24 V 2.8 W	
control supply voltage 1 at AC • at 50 Hz rated value • at 60 Hz rated value control supply voltage frequency • 1 rated value • 2 rated value control supply voltage 1 • at DC rated value holding power • at DC maximum • at DC maximum	24 V 24 V 50 Hz 60 Hz 24 V	
control supply voltage 1 at AC • at 50 Hz rated value • at 60 Hz rated value control supply voltage frequency • 1 rated value • 2 rated value control supply voltage 1 • at DC rated value holding power • at DC maximum • at DC maximum	24 V 24 V 50 Hz 60 Hz 24 V 2.8 W 2.9 W	
control supply voltage 1 at AC e at 60 Hz rated value e 1 rated value e 2 rated value e at DC rated value holding power e at DC maximum e at DC contacts for auxiliary contacts	24 V 24 V 50 Hz 60 Hz 24 V 2.8 W 2.9 W	
control supply voltage 1 at AC • at 50 Hz rated value • at 60 Hz rated value control supply voltage frequency • 1 rated value • 2 rated value control supply voltage 1 • at DC rated value holding power • at DC maximum • at DC contacts for auxiliary contacts number of NC contacts for auxiliary contacts	24 V 24 V 50 Hz 60 Hz 24 V 2.8 W 2.9 W	
control supply voltage 1 at AC e at 60 Hz rated value e 1 rated value e 2 rated value e at DC rated value holding power e at DC maximum e at DC contacts for auxiliary contacts	24 V 24 V 50 Hz 60 Hz 24 V 2.8 W 2.8 W 2.9 W	
control supply voltage 1 at AC • at 50 Hz rated value • at 60 Hz rated value control supply voltage frequency • 1 rated value • 2 rated value control supply voltage 1 • at DC rated value holding power • at AC maximum • at DC rated value holding power • at DC maximum • at DC contacts for auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts of instantaneous short-circuit trip	24 V 24 V 50 Hz 60 Hz 24 V 2.8 W 2.8 W 2.9 W	
control supply voltage 1 at AC • at 50 Hz rated value • at 60 Hz rated value • 1 rated value • 2 rated value control supply voltage 1 • at DC rated value holding power • at DC maximum • at DC maximum • at DC contacts for auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts of instantaneous short-circuit trip unit for signaling contact number of CO contacts of the current-dependent overload	24 V 24 V 50 Hz 60 Hz 24 V 2.8 W 2.9 W 1 1 1	
control supply voltage 1 at AC • at 50 Hz rated value • at 60 Hz rated value control supply voltage frequency • 1 rated value • 2 rated value control supply voltage 1 • at DC rated value holding power • at DC maximum • at DC maximum • at DC contacts for auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts of instantaneous short-circuit trip unit for signaling contact number of CO contacts of the current-dependent overload release for signaling contact	24 V 24 V 50 Hz 60 Hz 24 V 2.8 W 2.9 W 1 1 1 1	
control supply voltage 1 at AC <td a="" b="" b<="" end="" td="" to=""><td>24 V 24 V 50 Hz 60 Hz 24 V 2.8 W 2.9 W 1 1 1 1 1 1 1 1</td></td>	<td>24 V 24 V 50 Hz 60 Hz 24 V 2.8 W 2.9 W 1 1 1 1 1 1 1 1</td>	24 V 24 V 50 Hz 60 Hz 24 V 2.8 W 2.9 W 1 1 1 1 1 1 1 1
control supply voltage 1 at AC • at 50 Hz rated value • at 60 Hz rated value control supply voltage frequency • 1 rated value • 2 rated value control supply voltage 1 • at DC rated value holding power • at DC maximum • at DC maximum • at DC contacts for auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of NO contacts of instantaneous short-circuit trip unit for signaling contact number of CO contacts of the current-dependent overload release for signaling contact operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at DC-13 at 250 V Protective and monitoring functions	24 V 24 V 50 Hz 60 Hz 24 V 2.8 W 2.9 W 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
control supply voltage 1 at AC • at 50 Hz rated value • at 60 Hz rated value control supply voltage frequency • 1 rated value • 2 rated value control supply voltage 1 • at DC rated value holding power • at DC maximum • at DC maximum • at DC contacts for auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts of instantaneous short-circuit trip unit for signaling contact number of CO contacts of the current-dependent overload release for signaling contact operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at DC-13 at 250 V Protective and monitoring functions trip class	24 V 24 V 50 Hz 60 Hz 24 V 2.8 W 2.9 W 1 1 1 1 1 1 1 1	
control supply voltage 1 at AC • at 50 Hz rated value • at 60 Hz rated value control supply voltage frequency • 1 rated value • 2 rated value control supply voltage 1 • at DC rated value holding power • at DC maximum • at DC maximum • at DC contacts for auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of NO contacts of instantaneous short-circuit trip unit for signaling contact number of CO contacts of the current-dependent overload release for signaling contact operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at DC-13 at 250 V Protective and monitoring functions	24 V 24 V 50 Hz 60 Hz 24 V 2.8 W 2.9 W 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
control supply voltage 1 at AC • at 50 Hz rated value • at 60 Hz rated value control supply voltage frequency • 1 rated value • 2 rated value control supply voltage 1 • at DC rated value holding power • at AC maximum • at DC rated value holding power • at DC maximum • at DC contacts for auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of NO contacts of instantaneous short-circuit trip unit for signaling contact operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at DC-13 at 250 V Protective and monitoring functions trip class breaking capacity operating short-circuit current (lcs) • at 400 V	24 V 24 V 50 Hz 60 Hz 24 V 2.8 W 2.9 W 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
control supply voltage 1 at AC <td a="" b="" end="" of="" stat<="" state="" td="" the="" to=""><td>24 V 24 V 50 Hz 60 Hz 24 V 2.8 W 2.9 W 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1</td></td>	<td>24 V 24 V 50 Hz 60 Hz 24 V 2.8 W 2.9 W 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1</td>	24 V 24 V 50 Hz 60 Hz 24 V 2.8 W 2.9 W 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
control supply voltage 1 at AC • at 50 Hz rated value • at 60 Hz rated value control supply voltage frequency • 1 rated value • 2 rated value • at DC rated value control supply voltage 1 • at DC rated value holding power • at AC maximum • at DC maximum • at DC contacts for auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of NO contacts of instantaneous short-circuit trip unit for signaling contact operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at AC-12 maximum operational current of auxiliary contacts at DC-13 at 250 V Protective and monitoring functions trip class breaking capacity operating short-circuit current (lcs) • at 400 V • at 500 V rated value	24 V 24 V 50 Hz 60 Hz 24 V 2.8 W 2.9 W 1 1 1 1 1 1 1 1 1 CLASS 10 and 20 adjustable 53 kA 3 kA	

	-		
full-load current (FLA) for 3-phase AC motor			
 at 480 V rated value 	4 A		
at 600 V rated value	4 A		
yielded mechanical performance [hp] for 3-phase AC motor			
 at 200/208 V rated value 	0.75 hp		
 at 220/230 V rated value 	0.75 hp		
 at 460/480 V rated value 	2 hp		
 at 575/600 V rated value 	3 hp		
contact rating of auxiliary contacts according to UL	contacts 21-22, 13-14, 43-44 Q600 / A600, contacts 77-78 R300 / B300, contacts 95-96-98 R300 / D300		
Short-circuit protection			
product function short circuit protection	Yes		
design of short-circuit protection	electromagnetic		
design of the fuse link			
 for short-circuit protection of the auxiliary switch required 	fuse gL/gG: 10 A		
 for short-circuit protection of the signaling switch of the short-circuit release required 	6A gL/gG/400V		
 for short-circuit protection of the signaling switch of the overload release required 	4A gL/gG/400V		
Installation/ mounting/ dimensions			
mounting position	any		
recommended	vertical, on horizontal standard mounting rail		
fastening method	screw and snap-on mounting		
height	170 mm		
width	45 mm		
depth	165 mm		
Connections/ Terminals			
product function			
 removable terminal for main circuit 	Yes		
 removable terminal for auxiliary and control circuit 	Yes		
type of electrical connection			
for main current circuit	plug-in without terminals		
 for auxiliary and control circuit 	plug-in without terminals		
Safety related data			
B10 value with high demand rate acc. to SN 31920	3 000 000		
proportion of dangerous failures			
with low demand rate acc. to SN 31920	40 %		
 with high demand rate acc. to SN 31920 	50 %		
failure rate [FIT] with low demand rate acc. to SN 31920	100 FIT		
T1 value for proof test interval or service life acc. to	20 y		
IEC 61508	,		
protection class IP on the front acc. to IEC 60529	IP20		
touch protection on the front acc. to IEC 60529	finger-safe		
Communication/ Protocol			
product function bus communication	No		
protocol is supported			
AS-Interface protocol	No		
IO-Link protocol	No		
product function control circuit interface with IO link			
	NO		
	No		
Electromagnetic compatibility			
Electromagnetic compatibility conducted interference			
Electromagnetic compatibility conducted interference • due to burst acc. to IEC 61000-4-4	4 kV main contacts, 2 kV auxiliary contacts		
Electromagnetic compatibility conducted interference • due to burst acc. to IEC 61000-4-4 • due to conductor-earth surge acc. to IEC 61000-4-5 • due to conductor-conductor surge acc. to IEC			
Electromagnetic compatibility conducted interference • due to burst acc. to IEC 61000-4-4 • due to conductor-earth surge acc. to IEC 61000-4-5	4 kV main contacts, 2 kV auxiliary contacts 4 kV main contacts, 2 kV auxiliary contacts		


field-based interferer	nce acc. to IEC 6100	0-4-3 10) V/m		
electrostatic discharg	ge acc. to IEC 61000	- 4-2 8	kV		
conducted HF interference emissions acc. to CISPR11		c. to CISPR11 15	50 kHz 30 MHz Class	A	
field-bound HF interf	erence emission ac	c. to CISPR11 30) 1000 MHz Class A		
Supply voltage					
Supply voltage requi	red Auxiliary voltage	e N	C		
Display					
number of LEDs		2			
Certificates/ approvals	1				
General Product App	proval			EMC	Functional Safety/Safety of Machinery
SP SM	CCC		EHC		VDE
Declaration of Confo	ormity	Test Certificates	Marine / Shipping		
<u>Miscellaneous</u>	CE EG-Konf.	<u>Type Test</u> <u>Certificates/Test</u> <u>Report</u>	ABS	BUREAU VERITAS	Lloyd's Register urs
Marine / Shipping				other	
PRS	RINA	KIMPS	ONV-GL	<u>Confirmation</u>	
Further information Information- and Dow https://www.siemens.c Industry Mall (Online https://mall.industry.sie Cax online generator	om/ic10 ordering system) emens.com/mall/en/e		fb=3RA6120-0CB30		
Cax online generator		//CAXorder/default as	px?lang=en&mlfb=3RA6	\$120-0CB30	
Service&Support (Ma				<u>, 120-00000</u>	
https://support.industry					
Image database (pro	duct images 2D dir	onsion drawings 3) models, dovice circu	it diagrams. EPLAN m	acros)


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RA6120-0CB30&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current https://support.industry.siemens.com/cs/ww/en/ps/3RA6120-0CB30/char

Further characteristics (e.g. electrical endurance, switching frequency) http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RA6120-0CB30&objecttype=14&gridview=view1

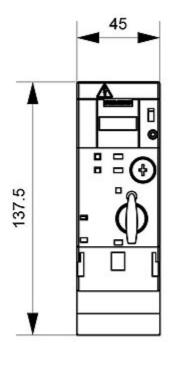

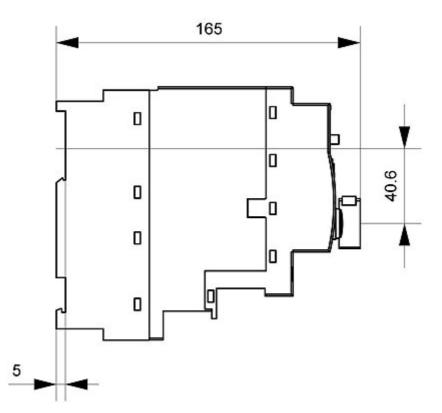

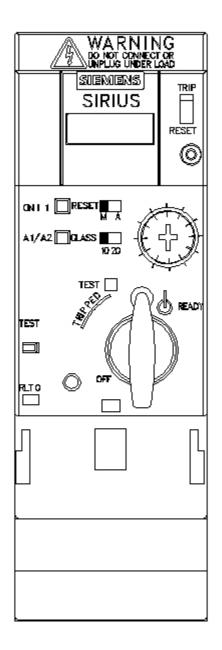

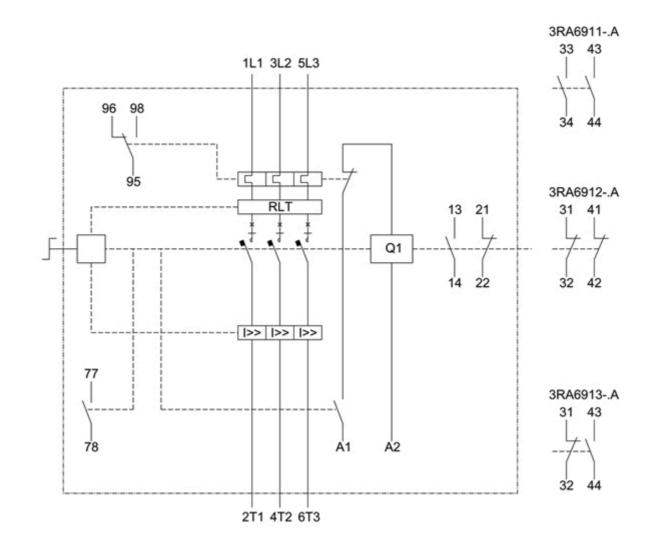

last modified:

1/20/2021 🖸