


Ultra High-Speed Mixed Signal ASICs

Office: (310) 530-9400 Fax: (310) 530-9402 www.adsantec.com

ASNT6163-KMC DC-32GHz Analog Signal Selector 1-of-2

- DC to 32*GHz* broadband operation
- Two differential CML-type input ports and one differential CML-type output port
- Temperature-stabilized differential gain of approximately 0dB
- 1*dB* compression point of 0*dBm*
- DC-to-1*GHz* broadband channel selector port
- Optional two-channel mixer/adder setting available
- Low jitter and limited temperature variation over industrial temperature range
- Single +3.6V or -3.6V power supply
- Power consumption: 700*mW*
- Fabricated in SiGe for high performance, yield, and reliability
- Custom CQFP 24-pin package

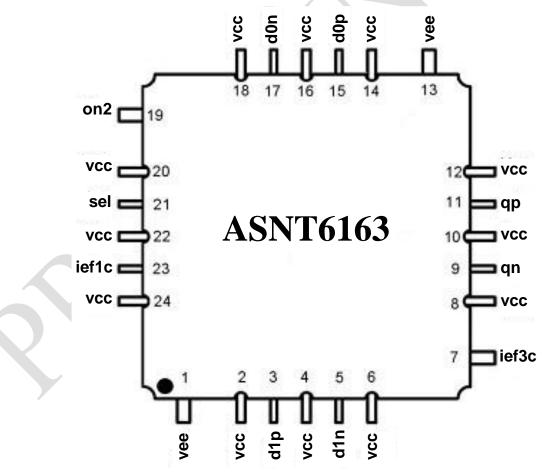



DESCRIPTION

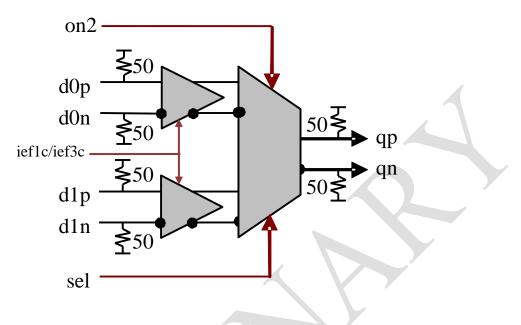


Fig. 1. Functional Block Diagram

The temperature stable ASNT6163-KMC analog signal selector 1-of-2 is intended for use in high-speed systems. The IC shown in Fig. 1 can deliver one of two different broad-band analog differential signals d0p/d0n and d1p/d1n to its differential output qp/qn with a nominal gain of 0dB. It can also be used as a two-channel analog mixer/adder of signals d0p/d0n and d1p/d1n. Two low-speed analog current controls lef1c and lef3c are available for bandwidth and peaking adjustments.

The active input selection is performed through the external high-speed single-ended port **sel** that can be referenced to either **vcc** or **vee**. When the low-speed single-ended control port **on2** is set to **vcc**, it switches the circuit into mixer/adder mode with both inputs active at the same time.

The part's I/O's support the CML logic interface with on chip 50*Ohm* termination to vcc and may be used differentially, AC/DC coupled, single-ended, or in any combination (also see POWER SUPPLY CONFIGURATION). In the DC-coupling mode, the input signal's common mode voltage should comply with the specifications shown in ELECTRICAL CHARACTERISTICS. In the AC-coupling mode, the input termination provides the required common mode voltage automatically.

POWER SUPPLY CONFIGURATION

The part can operate with either negative supply (vcc = 0.0V = ground and vee = -3.6V), or positive supply (vcc = +3.6V and vee = 0.0V = ground). In case of the positive supply, all I/Os need AC termination when connected to any devices with 50*Ohm* termination to ground.

Different PCB layouts will be needed for each different power supply combination.

All the characteristics detailed below assume vcc = 0.0V = ground.

Rev. 0.2.2

May 2020



ABSOLUTE MAXIMUM RATINGS

Caution: Exceeding the absolute maximum ratings shown in Table 1 may cause damage to this product and/or lead to reduced reliability. Functional performance is specified over the recommended operating conditions for power supply and temperature only. AC and DC device characteristics at or beyond the absolute maximum ratings are not assumed or implied. All min and max voltage limits are referenced to ground (assumed vcc).

Parameter	Min	Max	Units	
Supply Voltage (vee)		-4	V	
Power supply current		320	mA	
Input Voltage	vcc-1.2	vcc-0.6	V	
RF Input Voltage Swing (SE)		0.6	V	
Case Temperature		+90	°С	
Storage Temperature	-40	+100	°С	
Operational Humidity	10	98	%	
Storage Humidity	10	98	%	

Table 1. Absolute Maximum Ratings

TERMINAL FUNCTION

ТЕ	RMIN	NAL DESCRIPTION					
Name	No.	Туре					
	High-speed Signals						
d0p	15	CML -	Differential high speed data inputs with internal SE 500hm				
d0n	17	type	termination to VCC				
d1p	3	CML -					
d1n	5	type					
qp	11	CML -	Differential high speed data outputs with internal SE 500hm				
qn	9	type	termination to vcc. Require external SE 50 <i>Ohm</i> termination to vcc				
Control Signals							
sel	21	SE	High-speed high-impedance input (active: high, d1 is connected to				
501	21		q default: low, d0 is connected to q;)				
ief1c	23	Analog	Analog current control with internal 64 <i>KOhm</i> termination to VCC				
ief3c	7	Control	and 72KOhm termination to vee.				
on2	on2 19 CMOS		Low-speed high-impedance input (active: high, mixer/adder mode;				
		CIVIOS	default: low, 1-of-2 selector mode;)				
Supply and Termination Voltages							
Name Description		Description	Pin Number				
vcc	cc Positive power supply rail		power supply rail	2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24			
vee	Negative power supply rail			1, 13			



Ultra High-Speed Mixed Signal ASICs

 \mathbb{F}

Ξ

Office: (310) 530-9400 Fax: (310) 530-9402 www.adsantec.com


ELECTRICAL CHARACTERISTICS

PARAMETER M	IIN	TYP	MAX	X U	NIT	COMMENTS
		Gen	neral P	arame	eters	
vee	-3.4	-3.	6	-3.8	V	$\pm 5.5\%$
VCC		0.	0		V	External ground
Ivee		20	0		mА	In Selector Mode
Tvee		28	80		mА	In Mixer/Adder Mode
Power consumption		70	0		mW	In Selector Mode
Power consumption		100	00		mW	In Mixer/Adder Mode
Junction temperature	-25	5	0	125	$^{\circ}C$	
	Inp	out Ana	log (d(0p/d0n	, <mark>d1p/d</mark>	1n)
Bandwidth	DC			32	GHz	-3dB
Common mode level		VC	C		mV	AC-coupled
	0			400	V	Single-ended, with unused input not
Voltage swing, pk-pk	0		400		mV	connected or AC terminated
	0			800	mV	Differential
		-3	5		dB	at 3GHz
S11		-1	6		dB	at 10GHz
511		-1	1		dB	at 20GHz
		-9)		dB	at 25GHz
	Curr	ent Co	ntrol S	ignals	(ief1c/i	ef3c)
Control range	vee			vcc	V	
Default voltage level		veel	+1.9		V	at ±3.6 <i>V</i> supply
		Outp	ut An	alog (Q	p/qn)	
Bandwidth	DC			32	GHz	-3dB
Common mode level	vcc-0.55			V	With external 500hm	
Common mode level			V	DC termination		
Small Signal Differential Gain	-1.5	0.	0	+1.5	dB	up to 25 <i>GHz</i>
Output referred 1 <i>dB</i> Compression Point		1			dBm	Single-Ended, 20GHz
		0.	5		%	at 1 <i>GHz</i>
		0.6			%	at 10GHz
THD		1.9			%	at 25GHz
		2.5			%	at 35GHz
		Low-S	peed (Contro	l (on2)	
High logic level		VC	с С		V	Mixer/Adder Mode
Low logic level		ve			V	1-of-2 Selector Mode
	•	High-S	Speed	Contr	ol (sel)	
Bandwidth		1			GHz	
High logic level		VC	C		V	Input d1p/d1n is active
Low logic level		ve			V	Input d0p/d0n is active
Input current				20	иА	sink or source



PACKAGE INFORMATION

The chip die is housed in a custom 24-pin CQFP package shown in Fig. 2. The package provides a center heat slug located on its back side to be used for heat dissipation. ADSANTEC recommends for this section to be soldered to the **vcc** plain, which is ground for a negative supply, or power for a positive supply.

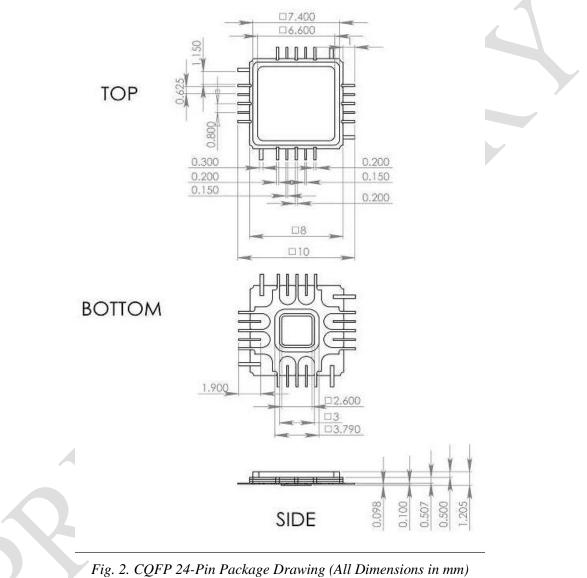

The part's identification label is ASNT6163-KMC. The first 8 characters of the name before the dash identify the bare die including general circuit family, fabrication technology, specific circuit type, and part version while the 3 characters after the dash represent the package's manufacturer, type, and pin out count.

This device complies with the Restriction of Hazardous Substances (RoHS) per 2011/65/EU for all ten substances.



REVISION HISTORY

Revision	Date	Changes			
0.2.2	05-2020	Updated Package Information			
0.1.2	08-2019	Corrected bandwidth			
0.0.2	08-2019	Updated Letterhead			
0.0.1	01-2019	Preliminary release			