## SIEMENS

## Data sheet


## 3RA2210-1HA16-2AK6



FUSELESS LOAD FEEDER REVERSING OPERATION, AC 400V, S00 5.5. ..8A, AC 110/120V 50/60HZ SCREW TERMINAL FOR RAIL MOUNTING, TYPE OF ASSIGNMENT 1,IQ = 150KA 1NC (CONTACTOR)

product brand name	SIRIUS
product designation	non-fused load feeders 3RA2
_design of the product	reversing starter
manufacturer's article number	
<ul> <li>of the supplied contactor</li> </ul>	<u>3RT2016-1AK62</u>
<ul> <li>of the supplied circuit-breakers</li> </ul>	<u>3RV2011-1HA10</u>
<ul> <li>of the supplied link module</li> </ul>	<u>3RA1921-1DA00</u>
General technical data	
size of the circuit-breaker	S00
size of load feeder	S00
product extension auxiliary switch	Yes
insulation voltage with degree of pollution 3 at AC rated value	690 V
degree of pollution	3
surge voltage resistance rated value	6 kV
shock resistance according to IEC 60068-2-27	6g / 11 ms
mechanical service life (switching cycles) of contactor typical	30 000 000
type of assignment	1
Substance Prohibitance (Date)	10/01/2009
Ambient conditions	
ambient temperature	
<ul> <li>during operation</li> </ul>	-20 +60 °C
<ul> <li>during storage</li> </ul>	-50 +80 °C
<ul> <li>during transport</li> </ul>	-50 +80 °C
Main circuit	
number of poles for main current circuit	3
design of the switching contact	electromechanical
adjustable current response value current of the current-dependent overload release	5.5 8 A
operating voltage	
<ul> <li>rated value</li> </ul>	690 V
<ul> <li>at AC-3 rated value maximum</li> </ul>	690 V
operating frequency rated value	50 60 Hz
operational current at AC-3 at 400 V rated value	6.5 A
operating power at AC-3	
<ul> <li>at 400 V rated value</li> </ul>	3 000 W
• at 500 V rated value	4 000 W
• at 690 V rated value	5 500 W
Control circuit/ Control	

control outputs voltors at AC	
control supply voltage at AC	440.1/
at 50 Hz rated value	110 V
at 60 Hz rated value	120 V
apparent holding power of magnet coil at AC	4.2 VA
Protective and monitoring functions	
trip class	CLASS 10
design of the overload release	thermal (bimetallic)
response value current of instantaneous short-circuit trip	104 A
unit UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	7.0 A
at 480 V rated value	7.6 A
at 600 V rated value	6.33 A
yielded mechanical performance [hp]	
for single-phase AC motor	
— at 110/120 V rated value	0.33 hp
— at 230 V rated value	1 hp
• for 3-phase AC motor	
— at 200/208 V rated value	2 hp
— at 220/230 V rated value	2 hp
— at 460/480 V rated value	5 hp
— at 575/600 V rated value	5 hp
Short-circuit protection	
product function short circuit protection	Yes
design of the short-circuit trip	magnetic
conditional short-circuit current (Iq)	
<ul> <li>at 690 V according to IEC 60947-4-1 rated value</li> </ul>	4 000 A
<ul> <li>at 400 V according to IEC 60947-4-1 rated value</li> </ul>	153 000 A
<ul> <li>at 500 V according to IEC 60947-4-1 rated value</li> </ul>	42 000 A
Installation/ mounting/ dimensions	
Installation/ mounting/ dimensions mounting position	vertical
	vertical screw and snap-on mounting onto 35 mm standard mounting rail
mounting position	
mounting position fastening method	screw and snap-on mounting onto 35 mm standard mounting rail
mounting position fastening method height	screw and snap-on mounting onto 35 mm standard mounting rail 170 mm
mounting position fastening method height width	screw and snap-on mounting onto 35 mm standard mounting rail 170 mm 90 mm
mounting position         fastening method         height         width         depth	screw and snap-on mounting onto 35 mm standard mounting rail 170 mm 90 mm
mounting position         fastening method         height         width         depth         required spacing	screw and snap-on mounting onto 35 mm standard mounting rail 170 mm 90 mm
mounting position         fastening method         height         width         depth         required spacing         • for grounded parts	screw and snap-on mounting onto 35 mm standard mounting rail 170 mm 90 mm 97.1 mm
mounting position         fastening method         height         width         depth         required spacing         • for grounded parts         — forwards	screw and snap-on mounting onto 35 mm standard mounting rail 170 mm 90 mm 97.1 mm
mounting position         fastening method         height         width         depth         required spacing         • for grounded parts         — forwards         — backwards	screw and snap-on mounting onto 35 mm standard mounting rail 170 mm 90 mm 97.1 mm 0 mm 0 mm
mounting position         fastening method         height         width         depth         required spacing         • for grounded parts         — forwards         — backwards         — upwards	screw and snap-on mounting onto 35 mm standard mounting rail 170 mm 90 mm 97.1 mm 0 mm 0 mm 20 mm
mounting position         fastening method         height         width         depth         required spacing         • for grounded parts         — forwards         — backwards         — upwards         — at the side	screw and snap-on mounting onto 35 mm standard mounting rail 170 mm 90 mm 97.1 mm 0 mm 0 mm 20 mm 9 mm
mounting position         fastening method         height         width         depth         required spacing         • for grounded parts         — forwards         — backwards         — upwards         — at the side         — downwards	screw and snap-on mounting onto 35 mm standard mounting rail 170 mm 90 mm 97.1 mm 0 mm 0 mm 20 mm 9 mm
mounting position         fastening method         height         width         depth         required spacing         • for grounded parts         — forwards         — backwards         — upwards         — at the side         — downwards         • for live parts	screw and snap-on mounting onto 35 mm standard mounting rail 170 mm 90 mm 97.1 mm 0 mm 0 mm 20 mm 9 mm 10 mm
mounting position         fastening method         height         width         depth         required spacing         • for grounded parts         — forwards         — backwards         — upwards         — at the side         — downwards         • for live parts         — forwards	screw and snap-on mounting onto 35 mm standard mounting rail 170 mm 90 mm 97.1 mm 0 mm 0 mm 20 mm 9 mm 10 mm 0 mm
mounting position         fastening method         height         width         depth         required spacing         • for grounded parts         — forwards         — backwards         — upwards         — at the side         — downwards         • for live parts         — forwards         — backwards	screw and snap-on mounting onto 35 mm standard mounting rail 170 mm 90 mm 97.1 mm 0 mm 0 mm 20 mm 9 mm 10 mm 0 mm
mounting position         fastening method         height         width         depth         required spacing         • for grounded parts         — forwards         — backwards         — upwards         — at the side         — downwards         • for live parts         — forwards         — upwards         — upwards         — obackwards         — upwards	screw and snap-on mounting onto 35 mm standard mounting rail 170 mm 90 mm 97.1 mm 0 mm 0 mm 20 mm 9 mm 10 mm 0 mm 20 mm 20 mm
mounting position         fastening method         height         width         depth         required spacing         • for grounded parts         — forwards         — backwards         — upwards         — at the side         — downwards         • for live parts         — forwards         — downwards         — forwards         — downwards         — hockwards         — downwards         — backwards         — downwards         — backwards         — upwards         — downwards	screw and snap-on mounting onto 35 mm standard mounting rail 170 mm 90 mm 97.1 mm 0 mm 0 mm 20 mm 9 mm 10 mm 0 mm 20 mm 10 mm
mounting position         fastening method         height         width         depth         required spacing         • for grounded parts         — forwards         — backwards         — upwards         — at the side         — downwards         • for live parts         — forwards         — downwards         • for live parts         — forwards         — at the side         — downwards         — at the side         — upwards         — at the side         — upwards         — at the side	screw and snap-on mounting onto 35 mm standard mounting rail 170 mm 90 mm 97.1 mm 0 mm 0 mm 20 mm 9 mm 10 mm 0 mm 20 mm 10 mm
mounting position         fastening method         height         width         depth         required spacing         • for grounded parts         — forwards         — backwards         — upwards         — at the side         — downwards         • for live parts         — forwards         — backwards         — at the side         — downwards         • for live parts         — forwards         — at the side         — upwards         — at the side         — downwards         — at the side         — downwards         — at the side	screw and snap-on mounting onto 35 mm standard mounting rail 170 mm 90 mm 97.1 mm 0 mm 0 mm 20 mm 10 mm 0 mm 20 mm 10 mm 9 mm 10 mm 20 mm 9 mm
mounting position         fastening method         height         width         depth         required spacing         • for grounded parts         — forwards         — backwards         — upwards         — at the side         — downwards         • for live parts         — forwards         — backwards         — at the side         — downwards         — backwards         — at the side         — downwards         — backwards         — upwards         — backwards         — upwards         — backwards         — upwards         — downwards         — at the side         Connections/ Terminals         type of electrical connection for main current circuit	screw and snap-on mounting onto 35 mm standard mounting rail 170 mm 90 mm 97.1 mm 0 mm 0 mm 20 mm 10 mm 0 mm 20 mm 10 mm 9 mm 10 mm 20 mm 9 mm
mounting position         fastening method         height         width         depth         required spacing         • for grounded parts         — forwards         — backwards         — upwards         — at the side         — downwards         • for live parts         — forwards         — downwards         • for live parts         — forwards         — at the side         — downwards         — at the side         — odownwards         — backwards         — upwards         — odownwards         — odownwards         — at the side         Connections/ Terminals         type of electrical connection for main current circuit         type of connectable conductor cross-sections	screw and snap-on mounting onto 35 mm standard mounting rail 170 mm 90 mm 97.1 mm 0 mm 0 mm 20 mm 9 mm 10 mm 0 mm 0 mm 20 mm 9 mm 10 mm 9 mm 20 mm
mounting position         fastening method         height         width         depth         required spacing         • for grounded parts         — forwards         — backwards         — upwards         — at the side         — downwards         • for live parts         — forwards         — at the side         — downwards         • for live parts         — forwards         — at the side         — downwards         — backwards         — upwards         — formards         — backwards         — upwards         — at the side         Connections/ Terminals         type of electrical connection for main current circuit         type of connectable conductor cross-sections         • for main contacts stranded         • at AWG cables for main contacts         connectable conductor cross-section for main contacts	screw and snap-on mounting onto 35 mm standard mounting rail 170 mm 90 mm 97.1 mm 0 mm 0 mm 20 mm 9 mm 10 mm 0 mm 20 mm 9 mm 10 mm 9 mm 10 mm 9 mm 10 mm 9 mm
mounting position         fastening method         height         width         depth         required spacing         • for grounded parts         — forwards         — backwards         — upwards         — at the side         — downwards         • for live parts         — forwards         — backwards         — upwards         — of rowards         — ownwards         • for live parts         — forwards         — upwards         — downwards         — at the side         Connections/ Terminals         type of electrical connection for main current circuit         type of connectable conductor cross-sections         • for main contacts stranded         • at AWG cables for main contacts         connectable conductor cross-section for main contacts finely stranded with core end processing	screw and snap-on mounting onto 35 mm standard mounting rail         170 mm         90 mm         97.1 mm         0 mm         0 mm         20 mm         9 mm         10 mm         0 mm         20 mm         9 mm         10 mm         9 mm         10 mm         9 mm         10 mm         9 mm         20 mm         20 mm         20 mm         10 mm         9 mm         20 mm<
mounting position         fastening method         height         width         depth         required spacing         • for grounded parts         — forwards         — backwards         — upwards         — at the side         — downwards         • for live parts         — forwards         — at the side         — downwards         • for live parts         — forwards         — at the side         — downwards         — backwards         — upwards         — formards         — backwards         — upwards         — formards         — backwards         — upwards         — formards         — backwards         — upwards         — for mards         — for wards         — othe side         Connections/ Terminals         type of electrical connection for main current circuit         type of connectable conductor cross-sections         • for main contacts stranded         • at AWG cables for main contacts         connectable conductor cross-section for main contacts <td>screw and snap-on mounting onto 35 mm standard mounting rail 170 mm 90 mm 97.1 mm 0 mm 0 mm 20 mm 9 mm 10 mm 0 mm 0 mm 20 mm 9 mm 10 mm 9 mm 10 mm 9 mm 10 mm 9 mm 20 mm 20</td>	screw and snap-on mounting onto 35 mm standard mounting rail 170 mm 90 mm 97.1 mm 0 mm 0 mm 20 mm 9 mm 10 mm 0 mm 0 mm 20 mm 9 mm 10 mm 9 mm 10 mm 9 mm 10 mm 9 mm 20
mounting position         fastening method         height         width         depth         required spacing         • for grounded parts         — forwards         — backwards         — upwards         — at the side         — downwards         • for live parts         — forwards         — backwards         — upwards         — of rowards         — ownwards         • for live parts         — forwards         — upwards         — downwards         — at the side         Connections/ Terminals         type of electrical connection for main current circuit         type of connectable conductor cross-sections         • for main contacts stranded         • at AWG cables for main contacts         connectable conductor cross-section for main contacts finely stranded with core end processing	screw and snap-on mounting onto 35 mm standard mounting rail         170 mm         90 mm         97.1 mm         0 mm         0 mm         20 mm         9 mm         10 mm         0 mm         20 mm         9 mm         10 mm         9 mm         10 mm         9 mm         10 mm         9 mm         20 mm         20 mm         20 mm         10 mm         9 mm         20 mm<
mounting position         fastening method         height         width         depth         required spacing         • for grounded parts         — forwards         — backwards         — upwards         — at the side         — downwards         • for live parts         — forwards         — backwards         — backwards         — of rowards         — of orwards         — of orwards         — of orwards         — downwards         — backwards         — upwards         — downwards         — backwards         — upwards         — downwards         — at the side         Connections/ Terminals         type of electrical connection for main current circuit         type of connectable conductor cross-sections         • for main contacts stranded         • at AWG cables for main contacts         connectable conductor cross-section for main contacts         finely stranded with core end processing         Safety related data         B10 value with high demand rate according to SN 31920         proportion of dangerous failures with high demand rat	screw and snap-on mounting onto 35 mm standard mounting rail 170 mm 90 mm 97.1 mm 0 mm 0 mm 20 mm 9 mm 10 mm 0 mm 0 mm 20 mm 9 mm 10 mm 20 mm 20 mm 10 mm 20 mm
mounting position         fastening method         height         width         depth         required spacing         • for grounded parts         — forwards         — backwards         — upwards         — at the side         — downwards         • for live parts         — forwards         — backwards         — upwards         — of rowards         — ownwards         • for live parts         — forwards         — backwards         — upwards         — downwards         — at the side         Connections/ Terminals         type of electrical connection for main current circuit         type of connectable conductor cross-sections         • for main contacts stranded         • at AWG cables for main contacts         connectable conductor cross-section for main contacts         finely stranded with core end processing         Safety related data         B10 value with high demand rate according to SN 31920	screw and snap-on mounting onto 35 mm standard mounting rail 170 mm 90 mm 97.1 mm 0 mm 0 mm 20 mm 9 mm 10 mm 0 mm 0 mm 20 mm 10 mm 9 mm 10 mm 9 mm 10 mm 9 mm 10 mm 9 mm 10 mm 9 mm 10 mm 9 mm 10 mm 10 mm 9 mm 10 mm

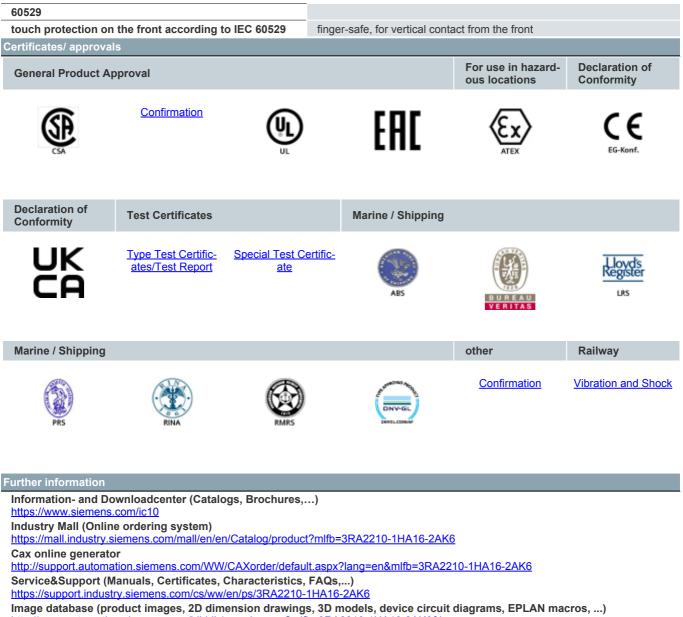


http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RA2210-1HA16-2AK6&lang=en

Characteristic: Tripping characteristics, I2t, Let-through current

https://support.industry.siemens.com/cs/ww/en/ps/3RA2210-1HA16-2AK6/char

Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RA2210-1HA16-2AK6&objecttype=14&gridview=view1

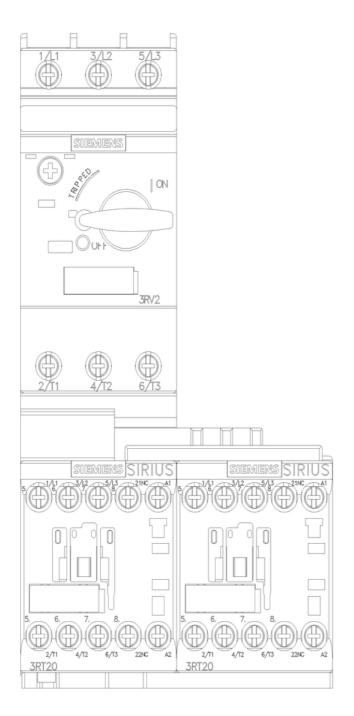

last modified:

12/15/2020 🖸