

Microfire LLC Mod-ISO Datasheet

Release Information

Copyright © 2021 Microfire LLC

This documentation is licensed under a [Creative Commons Attribution-NoDerivatives 4.0 International \(CC BY-ND\)](https://creativecommons.org/licenses/by-nd/4.0/).

Release History

Release	Date	Description
1.1.0	8/13/2021	Added additional reflow procedures and information regarding I ² C pullup resistors.
1.0.0	5/11/2021	Initial

Legal Disclaimer

TECHNICAL AND RELIABILITY DATA FOR MICROFIRE LLC PRODUCTS (INCLUDING DATASHEETS) AS MODIFIED FROM TIME TO TIME (“RESOURCES”) ARE PROVIDED BY MICROFIRE LLC "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW IN NO EVENT SHALL MICROFIRE LLC BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY

OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THE RESOURCES, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

MICROFIRE LLC reserves the right to make any enhancements, improvements, corrections or any other modifications to the RESOURCES or any products described in them at any time and without further notice.

The RESOURCES are intended for skilled users with suitable levels of design knowledge. Users are solely responsible for their selection and use of the RESOURCES and any application of the products described in them. User agrees to indemnify and hold MICROFIRE LLC harmless against all liabilities, costs, damages or other losses arising out of their use of the RESOURCES.

HIGH RISK ACTIVITIES. MICROFIRE LLC products are not designed, manufactured or intended for use in hazardous environments requiring fail safe performance, such as in the operation of nuclear facilities, aircraft navigation or communication systems, air traffic control, weapons systems or safety-critical applications (including life support systems and other medical devices), in which the failure of the products could lead directly to death, personal injury or severe physical or environmental damage, or business loss (“High Risk Activities”). MICROFIRE LLC specifically disclaims any express or implied warranty of fitness for High Risk Activities and accepts no liability for use or inclusions of MICROFIRE LLC products in High Risk Activities.

Microfire LLC Mod-ISO Datasheet

Release Information

Release History

Legal Disclaimer

About the Mod-ISO I2C UART Module

Mechanical Specification

Pinout

Surface Mounting

Operating Conditions

Electrical Specification

Isolated Power

Signal Isolation

Design Incorporation

Power

Ground

ENable

I²C Pullup Resistors

Unused Pins

Certificate of Compliance

RoHS 3 Directive 2015/863/EU

Justin Decker

About the Mod-ISO Module

An easy solution to create regulated and isolated power for I²C buses.

- Power Isolation
 - 3.3 isolated and regulated power output
 - 3.0 to 5.5 volts power input
- Signal Isolation
 - 3.3 to 5-volt logic level
 - I²C compatible

Mechanical Specification

The Mod-ISO module is a single-sided 25x15 mm 0.8 mm thick PCB with dual castellated/through-hole pins around the east and west edges. It is designed to be usable as a surface mount module as well as in Dual Inline Package (DIP) type format, with the 12 pins on a 2.54mm pitch grid with 0.8mm holes.

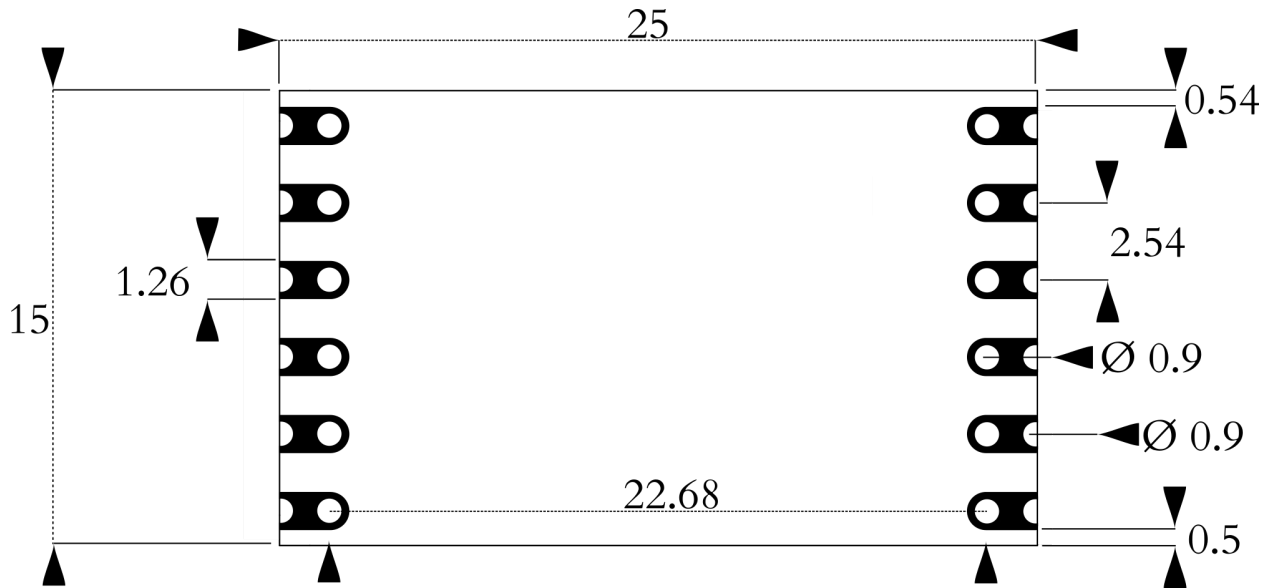


Figure 1. Physical dimensions of the module.

Pinout

The pinout of the module has been designed to provide as many interface options as possible.

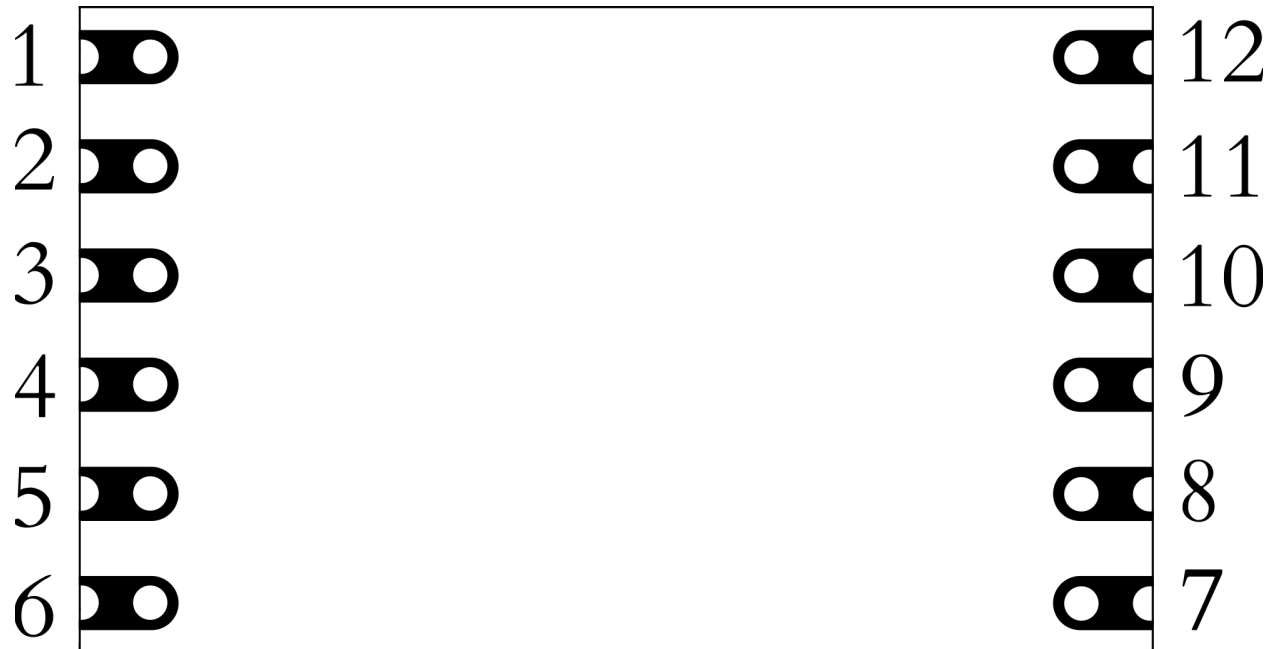


Figure 2. Pinout of the module.

Pin 1: GND Supply side ground

Pin 2: VIN Supply side voltage input, between 3.15 and 5.25 volts.

Pin 3: Non-isolated I²C SDA. Data line for I2C interface

Pin 4: Non-isolated I²C SCL. Clock line for I2C interface

Pin 5: EN. Enable pin.

Pin 6: Not used.

Pin 7: Not used.

Pin 8: Not used.

Pin 9: Isolated I²C SCL. Clock line for I2C interface


Pin 10: Isolated I²C SDA. Data line for I2C interface.

Pin 11: Isolated 3.3-volt output

Pin 12: Isolated Ground.

Surface Mounting

The following figure shows the recommended footprint for mounting the module through reflow processes. It provides for a Class 1 connection (*IPC-A-610G § 8.3.4 Castellated Terminations*).

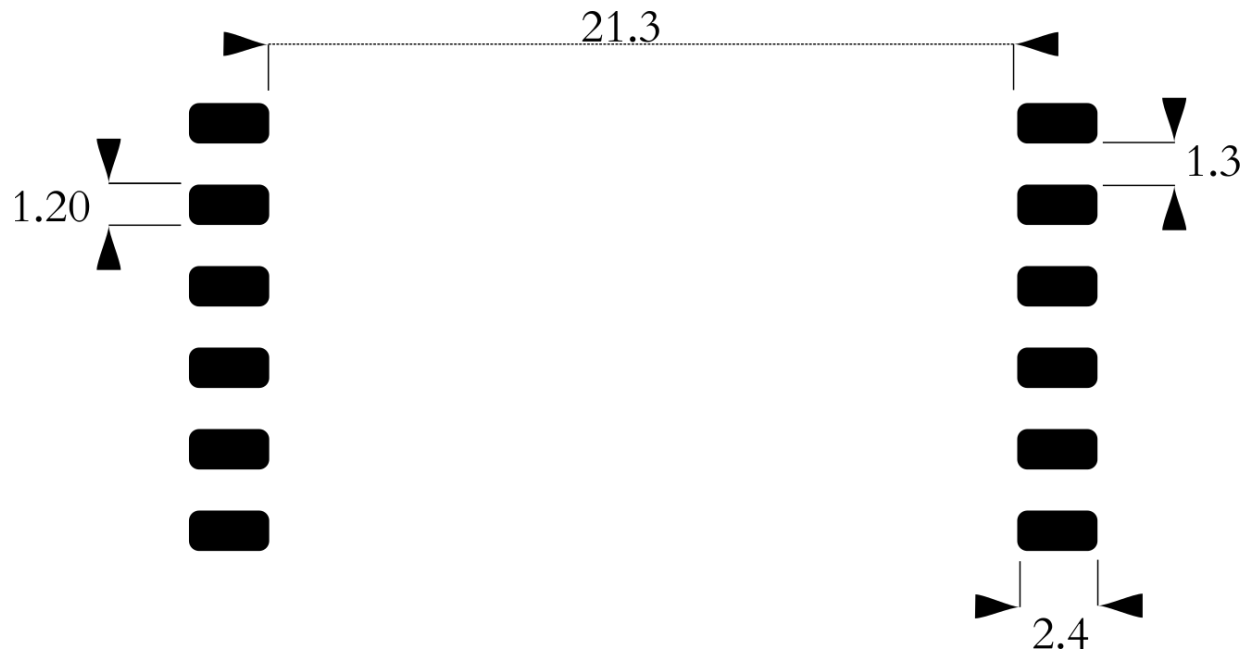

It is recommended that the stencil be 8 mils in thickness to ensure enough solder paste can flow into the castellations.

The module is assembled with [Chip Quik SMD291SNL50T3](#) (Sn96.5/Ag3.0/Cu0.5) solder paste, a lead-free paste with a 249-degree Celsius peak reflow temperature. Reflowing the module multiple times can cause malfunction, to avoid the issue, if it is possible, use a lower melting-point temperature solder paste.

Operating Conditions

Temperature:

- **Absolute:**
 - **Maximum:** 105 C
 - **Minimum:** -40 C

Voltage:

- **Absolute Maximum:** 5.5 volts
- **Absolute Minimum:** 3.0 volts

Electrical Specification

This module incorporates an Analog Devices ADM3260. Refer to their [datasheet](#) for detailed information.

Isolated Power

Output power varies based on input power:

- 5.0 volts: 100 mW
- 3.3 volts: 66 mW

Signal Isolation

The module provides isolation suitable for use in I2C buses.

Design Incorporation

Adding the module is a straightforward process.

Power

A suitable power supply must be supplied between 3.0 and 5.5 volts.

Ground

A low-impedance connection is needed.

ENable

The ENable **Pin 5** must be pulled low to activate the module. Pulling it high will deactivate the module to conserve power.

I²C Pullup Resistors

Pullup resistors are required on the non-isolated side (Pin 3 and Pin 4) sized appropriately for the bus speed, devices on the bus, etc. Pullup resistors are not required on the isolated side.

Unused Pins

Any unused pins should be left unconnected to any other trace or net.



Microfire LLC

Justin Decker, CEO
61190 Deronda Ave
Whitewater, CA 92282
<https://microfire.co>
justin@microfire.co

17 May 2021

Certificate of Compliance

RoHS 3 Directive 2015/863/EU

Microfire LLC certifies to the best of its knowledge and belief that the products listed herein conform with RoHS 3 Directive 2015/863/EU and its subsequent amendments. This declaration further certifies that Microfire LLC has obtained RoHS Certificates of Compliance from each applicable supplier of materials and parts used in the assembly and manufacture of these goods.

Modules

Mod-EC
Mod-pH
Mod-ORP
Mod-ISO

Development Boards

Isolated Qwiic Dev Board
Mod-EVAL
Mod-EVAL_ISO

Probes

Industrial pH Probe
Industrial EC Probe
Industrial ORP Probe
Lab pH Probe
Lab EC Probe
Lab ORP Probe


Justin Decker

