# **Technical Data Sheet**

PART NUMBER: **R574312625** 



SP6T Terminated Ramses SMA 3GHz Normally open Indicators 12Vdc
TTL Diodes D-sub connector

#### RF CHARACTERISTICS

PAGE 1/2

Number of ways : 6

ISSUE **22-03-22** 

Frequency range : 0 - 3 GHz Impedance : 50 Ohms

Frequency (GHz)	DC - 3
VSWR max	1,20
Insertion loss max	0.20 dB
Isolation min	80 dB
Average power (*)	240 W

TERMINATION IMPEDANCE : 50 Ohms

TERM. AVG. POWER AT 25° C : 1 W per termination / 3 W total power

SERIE: SPnT

#### **ELECTRICAL CHARACTERISTICS**

Actuator : NORMALLY OPEN

Nominal current \*\* : 250 mA

Actuator voltage (Vcc) : 12V (10.2 to 13V)

Terminals : 25 pins D-SUB male connector

Indicator rating : 1 W / 30 V / 100 mA

TTL inputs (E) - High level : 2.2 to 5.5 V / 800 $\mu$ A at 5.5 V

- Low level : 0 to 0.8 V / 20 $\mu$ A at 0.8 V

### MECHANICAL CHARACTERISTICS

Connectors : SMA female per MIL-C 39012 Life : 2 million cycles per position

## **ENVIRONMENTAL CHARACTERISTICS**

Operating temperature range : -40°C to +85°C Storage temperature range : -55°C to +85°C

(\* Average power at 25°C per RF Path)

(\*\* At 25° C ±10%)

(\*\*\* Nominal voltage; 25° C)








SP6T Terminated Ramses SMA 3GHz Normally open Indicators 12Vdc
TTL Diodes D-sub connector

SERIE : SPnT PART NUMBER : R574312625


# DRAWING

PAGE **2/2** 




ISSUE **22-03-22** 

TTL input	RF Continuity	Ind.
E1 = 1	$IN \leftrightarrow 1$	D.E
E2 = 1	$IN \leftrightarrow 2$	D.F
E3 = 1	$IN \leftrightarrow 3$	D.G
E4 = 1	$IN \leftrightarrow 4$	D.H
E5 = 1	IN ↔ 5	D.I
E6 = 1	$IN \leftrightarrow 6$	D.J




General tolerances: ±0,5 mm [0,02 in]





# SCHEMATIC DIAGRAM

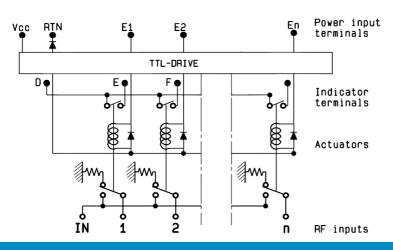

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from Radiall. The data defined in this document are given as an indication, in the effort to improve our products; we reserve the right to make any changes judged necessary.