



Electrical Specifications

Center Frequency: 202 MHz
3dB Bandwidth Min: 170-230 MHz
Insertion Loss: 1.5 dB Max at Fo
Attenuation: >45 dB @ ≤120 MHz
>35 dB @ ≥300-900 MHz
In/Out Impedance: 50 Ω


Mechanical

Connector Type: F-Type (F)
Dimensions: 2.38 x 1.0 x 1.0 Inches

Environmental

Operating Temperature: -30 to +85° C
Storage Temperature: -40 to +95° C
Shock: 20 G. 11 ms
Vibration: 20 G. 5 to 200 MHz

Outline Drawing:

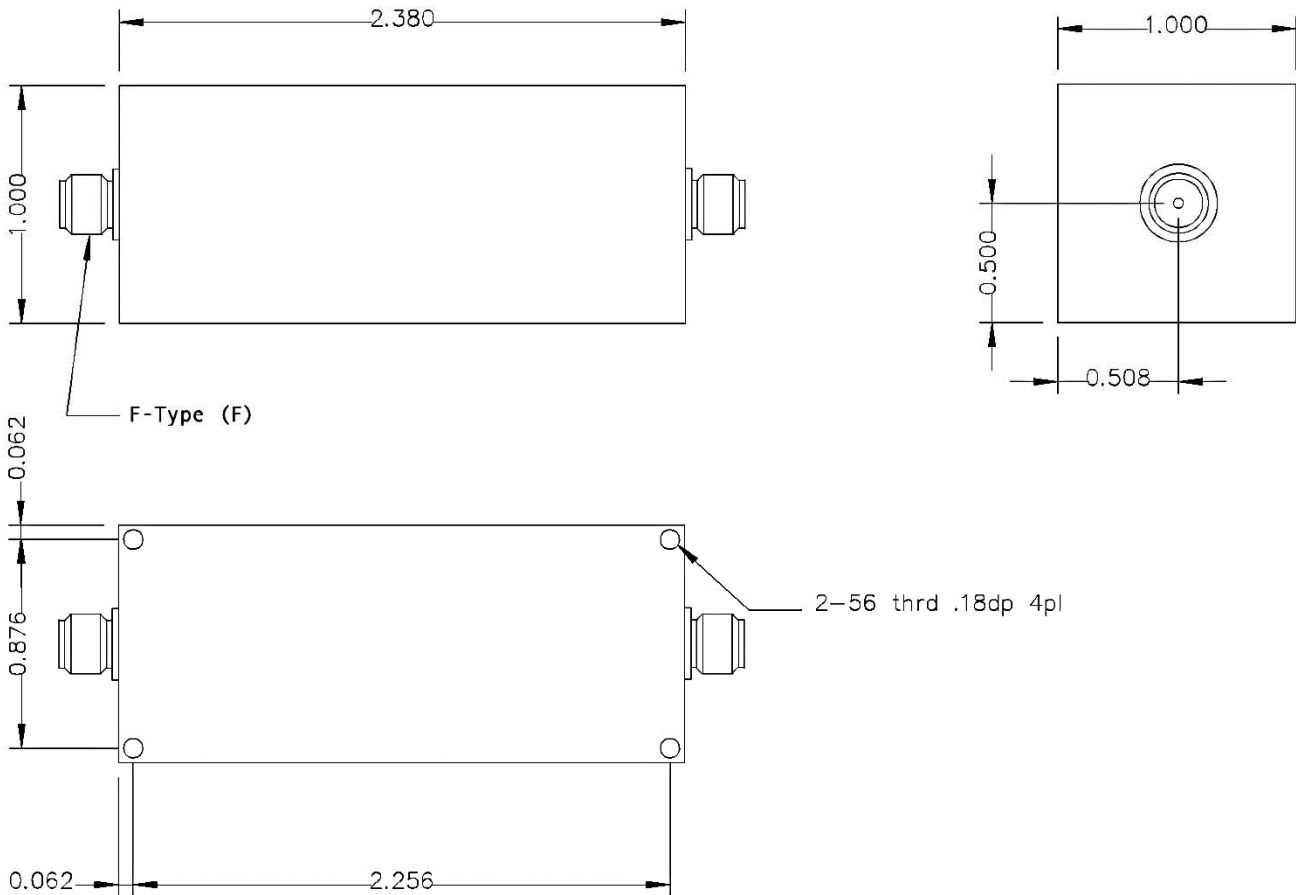



Response Plot:

