

WIRE CONNECTOR; 4 PCS. ACCESSORY FOR: 3VA5/6 400/600



Model	
product brand name	SETRON
product designation	accessories
Accessories	Wire connector
General technical data	
designation / of the terminal	TA1.5
Connections according IEC	
connectable conductor cross-section	
<ul style="list-style-type: none"> <li>for copper cable / stranded / minimum</li> <li>for copper cable / stranded / maximum</li> <li>for aluminum cable / stranded / minimum</li> <li>for aluminum cable / stranded / maximum</li> </ul>	50 mm <sup>2</sup> 300 mm <sup>2</sup> 50 mm <sup>2</sup> 300 mm <sup>2</sup>
stripped length	28 mm
tightening torque / when using copper cables	
<ul style="list-style-type: none"> <li>stranded</li> <li>finely stranded</li> </ul>	50 - 300 mm <sup>2</sup> : 42.4 Nm 50 - 300 mm <sup>2</sup> : 42.4 Nm
Connections according UL	
permissible temperature / of connectable conductor / according to UL 486A-486B	75 °C
stripped length	1.1 in
connectable conductor cross-section	
<ul style="list-style-type: none"> <li>for copper cable / stranded / minimum</li> <li>for copper cable / stranded / maximum</li> <li>for copper cable / finely stranded / minimum</li> <li>for copper cable / finely stranded / maximum</li> <li>for aluminum cable / stranded / minimum</li> <li>for aluminum cable / stranded / maximum</li> </ul>	1 AWG 600 kcmil 1 AWG 600 kcmil 1 AWG 600 kcmil
tightening torque / when using copper cables	
<ul style="list-style-type: none"> <li>stranded</li> <li>finely stranded</li> </ul>	1 AWG - 600 kcmil: 375 lb-in 1 AWG - 600 kcmil: 375 lb-in

**Further information**

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9374-0JB13>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9374-0JB13>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3VA9374-0JB13](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9374-0JB13)

CAx-Online-Generator

<http://www.siemens.com/cax>

**Tender specifications**

<http://www.siemens.com/specifications>

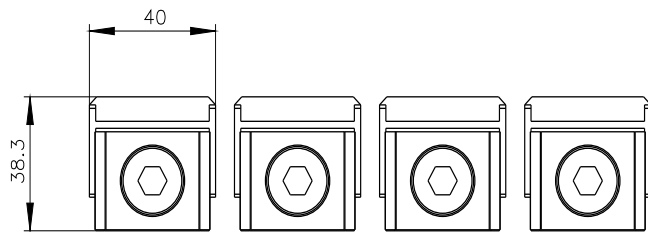

last modified:

7/5/2022 

