


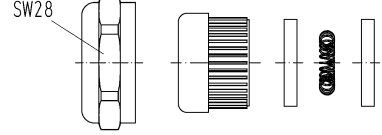


Technical characteristics

Limiting temperature -40 ... +130 °C
 Degree of protection acc. to IEC IP65
 60529

Technical characteristics

Material (cable glands) Metal
 RoHS compliant with exemption

| Identification | Size | Clamping range (mm) | Part number | Drawing (dimensions in mm) | | | | | | | | | | | | | | | | |
|---|-------------------|---|--|--|--|-------|-----------|----|----------------|----------------|-------------|----|----------------|----------------|-------------|----|----------------|--------------|-------------|----|
| Han-Compact®, Cable gland, for hoods, IP65  | M25 M25 | 10.5 ... 14 14 ... 17 | 19 12 000 5057 19 12 000 5058 |  | | | | | | | | | | | | | | | | |
| Han-Compact®, Cable gland, EMC version, for hoods  | M25 M25 M25 | 10.5 ... 14 10.5 ... 14 14 ... 17 | 19 62 000 5056 19 62 000 5057 19 62 000 5058 |  <table border="1"> <thead> <tr> <th></th> <th>Cable</th> <th>Shielding</th> <th>SW</th> </tr> </thead> <tbody> <tr> <td>19 62 000 5056</td> <td>10.5 ... 14 mm</td> <td>9 ... 13 mm</td> <td>28</td> </tr> <tr> <td>19 62 000 5057</td> <td>10.5 ... 14 mm</td> <td>6 ... 11 mm</td> <td>28</td> </tr> <tr> <td>19 62 000 5058</td> <td>14 ... 17 mm</td> <td>9 ... 13 mm</td> <td>28</td> </tr> </tbody> </table> | | Cable | Shielding | SW | 19 62 000 5056 | 10.5 ... 14 mm | 9 ... 13 mm | 28 | 19 62 000 5057 | 10.5 ... 14 mm | 6 ... 11 mm | 28 | 19 62 000 5058 | 14 ... 17 mm | 9 ... 13 mm | 28 |
| | Cable | Shielding | SW | | | | | | | | | | | | | | | | | |
| 19 62 000 5056 | 10.5 ... 14 mm | 9 ... 13 mm | 28 | | | | | | | | | | | | | | | | | |
| 19 62 000 5057 | 10.5 ... 14 mm | 6 ... 11 mm | 28 | | | | | | | | | | | | | | | | | |
| 19 62 000 5058 | 14 ... 17 mm | 9 ... 13 mm | 28 | | | | | | | | | | | | | | | | | |