SPECIFICATIONS			
PARAMETERS	VALUES	UNITS	
RESONANT FREQUENCY	2,900 ± 500	Hz	
RESONANT IMPEDANCE (MAX)	500	Ohm	
MAX INPUT VOLTAGE	30	Vp-p	
CAPACITANCE @ 1kHZ	25,000 ± 30%	рF	
PLATE MATERIAL	BRASS	-	
OPERATING TEMPERATURE	-20 ~ +70	°C	
STORAGE TEMPERATURE	-30 ~ +80	°C	
WEIGHT	3.5	g	

1. ALL DIMENSIONS ARE IN MILLIMETERS.

3. THIS PART IS RoHS 2011/65/EU COMPLIANT.


WITHOUT NOTICE.

2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL

THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PUI AUDIO, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PUI AUDIO, INC. IS PROHIBITED.

©2010, PUI AUDIO, Inc.

REVISION HISTORY			
LTR	DESCRIPTION	DATE	APPROVED
-	RELEASED FROM ENGINEERING	12/06/2013	
Α	UPDATE PLATE THICKNESS DIMENSION	11/8/2019	ML

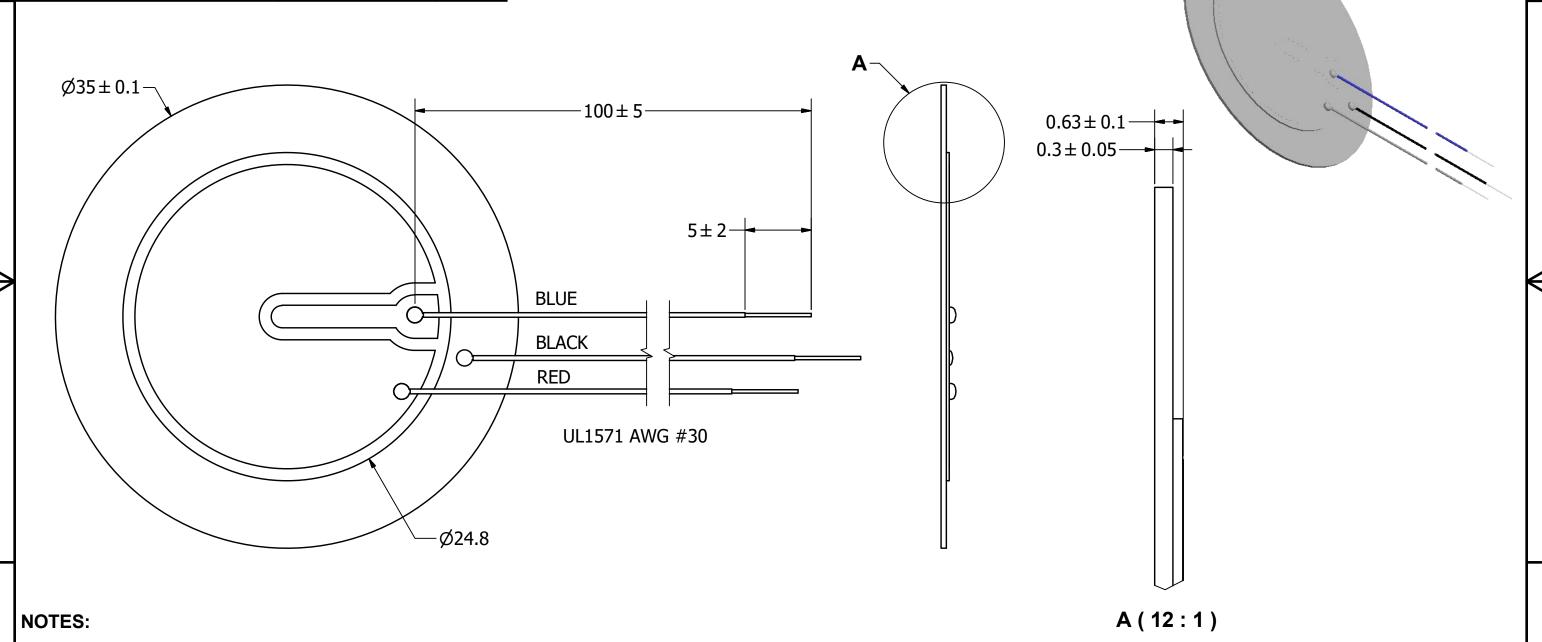

UNLESS OTHERWISE

SPECIFIED:

DIMENSIONS ARE IN MILLIMETERS,

TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°.

AB3529BF-LW100-R.idw

Designed by

J.D.

SIZE

Date

12/6/2013

Checked by

M.L

Approved by

B.R.

Bender

AB3529BF-LW100-R

Date

12/6/2013 | 12/6/2013

Drawn Date

Sheet

1/1

Date

12/6/2013