

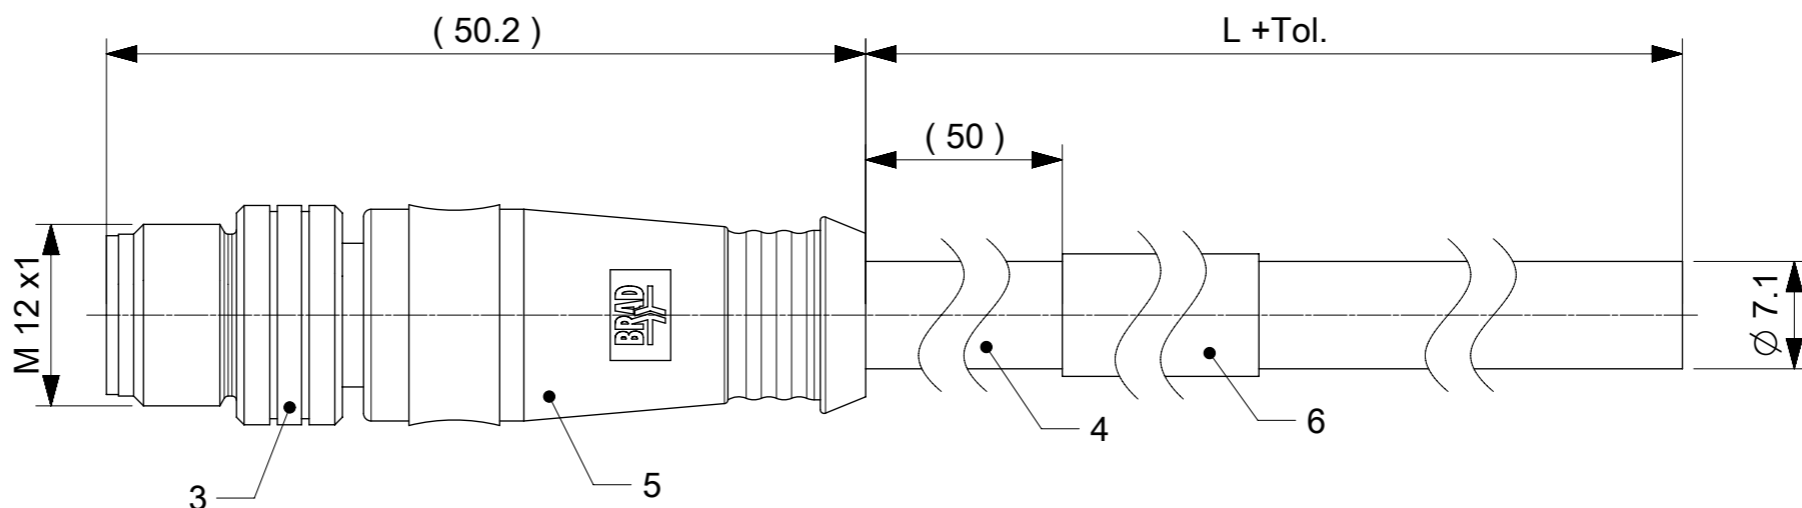
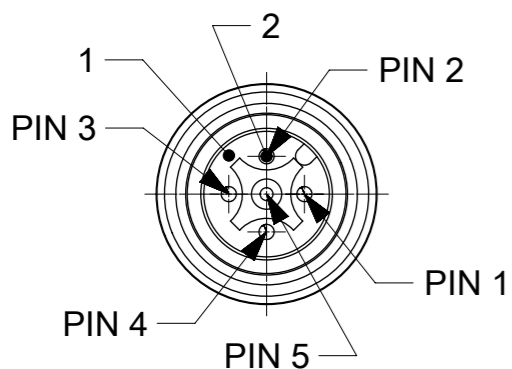


CONNECTOR SPECIFICATION

RATED VOLTAGE: 250 V AC/DC  
 RATED CURRENT: 4 A  
 PROTECTION: IP67  
 OPERATING TEMPERATURE: -25°C TO +85°C

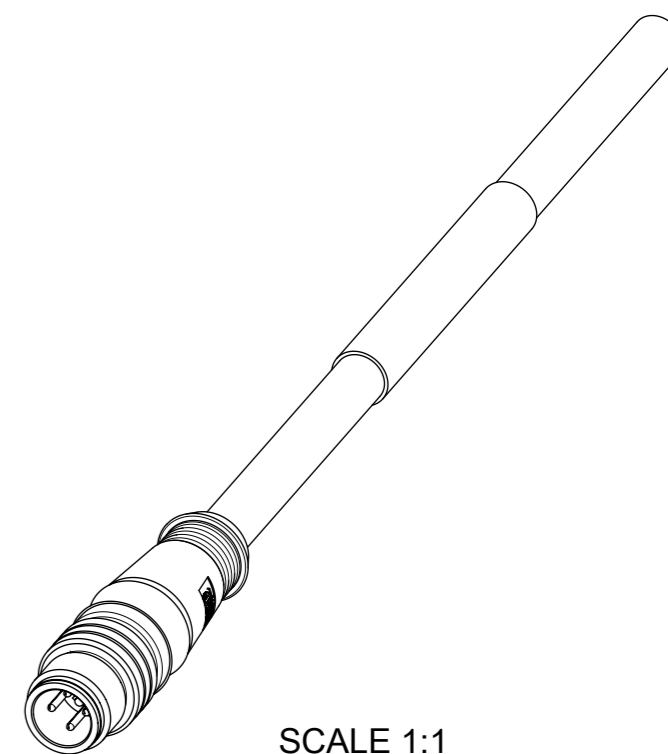

WIRING DIAGRAM

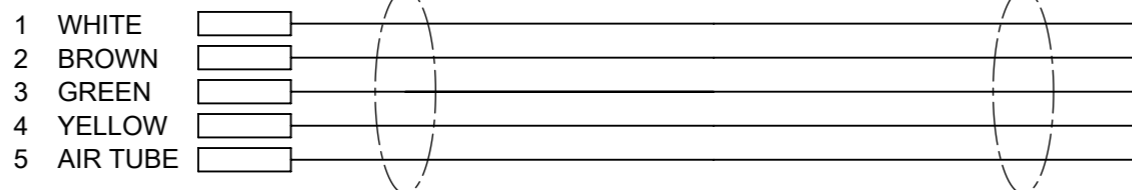

SCALE 1:1

TABLE 1

POS	QTY	DESCRIPTION	MATERIAL	FINISH
1	1	INSERT M12 MA 5P BK	ELASTOLLAN	-
2	4	CONTACT 10 MA	COPPER ALLOY	SELECTIVE GOLD OVER NICKEL
3	1	SHELL M12 MA	BRASS	NICKEL PLATED
4	-	CABLE	SEE SHEET 2	-
5	-	OVERMOULDING MATERIAL BK	TPU	-
6	1	LABEL	VINYL	-

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													
QUALITY SYMBOLS		2016/07/12		2016/07/29		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION UNITS		SCALE			
FA	= 0	EC NO: 106989 DRWN: FGAIK CHK'D: REV APPR: RSILLER		RSILLER		ANGULAR TOL ± 1.0 °		MM		2:1			
FE	= 0					4 PLACES ±		DRWN BY		DATE		molex®	
FF	= 0					3 PLACES ±		FGAIK		2016/07/12			
FD	= 0					2 PLACES ± 0.05		CHK'D BY		DATE			
FC	= 0					1 PLACE ± 0.3		APPR BY		DATE		PRODUCT CUSTOMER DRAWING	
FX	= 0					0 PLACES ± 0.5		RSILLER		2016/07/29		SERIES	
FS	= 0	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		A3		THIRD ANGLE PROJECTION		120065		SEE SHEET 2			
FT	= 0							DRAWING SIZE		CUSTOMER			
								A3		GENERAL MARKET			
								DOCUMENT NUMBER		DOC TYPE			
								1200659862		PSD			
								DOC PART		SHEET NUMBER			
								000		1 OF 2			

ENGINEERING NO. - NUMERICAL CODE (Available parts see PART LIST table. Others on request).

OPTIONS

805006XXXMXXX

80=M12x1  
Single ended

Poles:  
5=5 Poles

Heads style:  
006=Plug Male straight

Cable type: See Table 3

Units:  
M=Meter

Length  
Examples:  
005=0.5 units  
010=1 units  
100=10 units

Overmold color:  
Blank (Standard)=Black  
H= 2 pcs. of I/D Carrier PVC Transparent




TABLE 2

MOLEX PN	ENGINEERING NO.	L [mm]	Tol. [mm]
1200659862	805006EP2M006	600	+40
1200659863	805006EP2M010	1000	+40
1200659864	805006EP2M015	1500	+60
1200659865	805006EP2M020	2000	+60
1200659866	805006EP2M025	2500	+60
1200659867	805006EP2M030	3000	+60
1200659868	805006EP2M040	4000	+60
1200659869	805006EP2M050	5000	+60
1200659870	805006EP2M075	7500	+80
1200659871	805006EP2M100	10000	+80
1200659872	805006EP2M120	12000	+140
1200659873	805006EP2M150	15000	+140
1200659874	805006PP2M006	600	+40
1200659875	805006PP2M010	1000	+40
1200659876	805006PP2M015	1500	+60
1200659877	805006PP2M020	2000	+60
1200659878	805006PP2M025	2500	+60
1200659879	805006PP2M030	3000	+60
1200659880	805006PP2M040	4000	+60
1200659881	805006PP2M050	5000	+60
1200659882	805006PP2M075	7500	+80
1200659883	805006PP2M100	10000	+80
1200659884	805006PP2M120	12000	+140
1200659885	805006PP2M150	15000	+140

TABLE 3

CABLE TYPE	NO. OF WIRES	CROSS SECTION	CABLE JACKET	UL	TEMPERATURE RANGE		SHIELD
					STATIC	FLEX	
EP2	4+air tube	0.25mm <sup>2</sup>	PVC BLACK	UL 1731/2517	-25°C to +105°C	-5°C to +105°C	YES
PP2	4+air tube	0.25mm <sup>2</sup>	PUR BLACK	UL 1729/20233	-40°C to +80°C	-25°C to +80°C	YES

QUALITY SYMBOLS FA = 0 FE = 0 FP = 0 FV = 0 FC = 0 FX = 0 FS = 0 FT = 0	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										
	EC NO: 106989 DRWN: FGAIK CHK'D: RSILLER APPR: RSILLER	2016/07/12 2016/07/29	GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL ± 1.0 ° 4 PLACES ± 3 PLACES ± 2 PLACES ± 0.05 1 PLACE ± 0.3 0 PLACES ± 0.5	DIMENSION UNITS: MM SCALE: 1:1	DRWN BY: FGAIK DATE: 2016/07/12		CHK'D BY: RSILLER DATE: 2016/07/29		APPR BY: RSILLER DATE: 2016/07/29		DRAWING SIZE: A3 THIRD ANGLE PROJECTION
PRODUCT CUSTOMER DRAWING											
SERIES: 120065		MATERIAL NUMBER: SEE TABLE 2				CUSTOMER: GENERAL MARKET					
DOCUMENT NUMBER: 1200659862				DOC TYPE: PSD		DOC PART: 000		SHEET NUMBER: 2 OF 2			