

“Stay Connected” with



Liquid Tight Cordgrips


a PennEngineering® Company



## Heyco® Retaining Sealing Washers

Will Fit These Electrical Fitting Threaded Hubs	PART NO. Black	DESCRIPTION	PART DIMENSIONS					
			A Inside Diameter		B Outside Diameter		C Thickness	
			in.	mm.	in.	mm.	in.	mm.
<b>NPT Hubs</b>								
1/4	<b>G6000</b>	RSW 1/4 NPT	.540	13,7	.740	18,8	.076	1,9
3/8	<b>G6001</b>	RSW 3/8 NPT	.680	17,3	.865	22,0		
1/2	<b>G6002</b>	RSW 1/2 NPT	.875	22,2	1.050	26,7		
3/4	<b>G6003</b>	RSW 3/4 NPT	1.109	28,2	1.300	33,0		
1	<b>G6004</b>	RSW 1 NPT	1.375	34,9	1.725	43,8		
<b>NEW!</b> 1-1/4	<b>G6005</b>	RSW 1-1/4 NPT	1.735	44,1	2.094	53,2		
<b>NEW!</b> 1-1/2	<b>G6006</b>	RSW 1-1/2 NPT	1.984	50,4	2.375	60,3		
<b>NEW!</b> 2	<b>G6007</b>	RSW 2 NPT	2.469	62,7	2.740	69,6		
<b>Pg Hubs</b>								
Pg 7	<b>G6010</b>	RSW PG 7	.495	12,6	.740	18,8	.076	1,9
Pg 9	<b>G6011</b>	RSW PG 9	.600	15,2	.865	22,0		
Pg 13	<b>G6013</b>	RSW PG 13.5	.810	20,6	1.050	26,7		
Pg 16	<b>G6014</b>	RSW PG 16	.890	22,6	1.187	30,1		
Pg 21	<b>G6015</b>	RSW PG 21	1.120	28,4	1.300	33,0		
Pg 29	<b>G6016</b>	RSW PG 29	1.475	37,5	1.725	43,8		
<b>Metric Hubs</b>								
M12	<b>G6020</b>	RSW M12	.475	12,1	.740	18,8	.076	1,9
M16	<b>G6021</b>	RSW M16	.635	16,1	.865	22,0		
M20	<b>G6022</b>	RSW M20	.790	20,1	1.050	26,7		
M25	<b>G6023</b>	RSW M25	.990	25,1	1.300	33,0		
M32	<b>G6024</b>	RSW M32	1.270	32,3	1.725	43,8		

Standard color black.

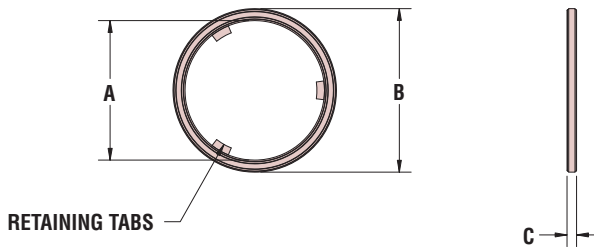

- Retaining tabs hold washer on threads for easier assembly.
- Liquid tight, dust tight, and oil tight at enclosure.
- Suitable for wet locations requiring a separate gasket between the box and fitting.
- Also suitable for other panel sealing applications.
- Easy to install since washers seal off on the perimeter, not on the connector threads.
- Special double sealing ridges compensate for minor unevenness at enclosure.

Material SBR (Styrene Butadiene)  
 Flammability Rating HB  
 Temperature Range -4°F (-20°C) to 212°F (100°C)