


order number	lens name	f-stop
0703-090-000-25	Rodagon-F 4/40	4
0703-090-000-26	Rodagon-F 5.6/40	5.6
0703-090-000-27	Rodagon-F 8/40	8

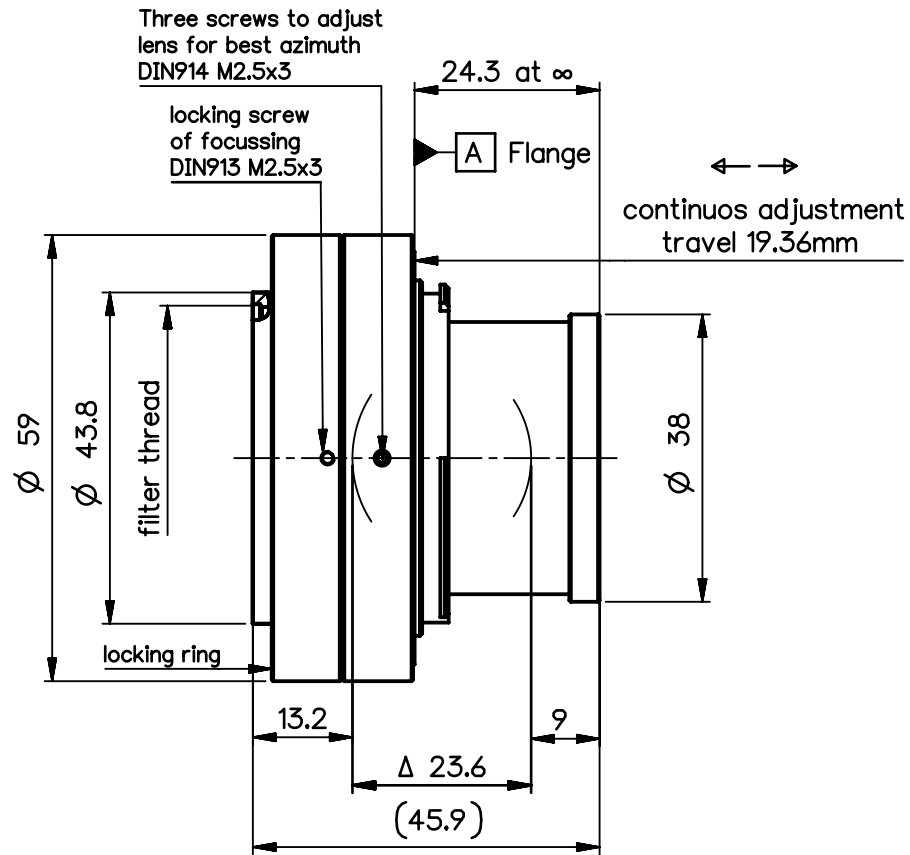


<b>Specification</b>		ON	7411-9001	
image circle max. (mm)	44	working distance (mm)	94 - ∞	
focal length f' (mm) *	40.4	interface	F-mount	
magnification β' [range]	-0.1 [-0.5 ... 0]	filter thread	M40.5 x0.5	
spectral range λ (nm)	400 - 750	weight (g)	150	
schematic diagram		design includes CCD cover glass: no		
*) in air		SF (mm)	-26.5	f-stop
		S'F' (mm) *	31.2	∅ EnP
		HH' (mm) *	0.5	∅ Exp
		SH (mm)	13.9	
		S'H' (mm) *	-9.2	
		SEnP (mm)	11.1	
		S'Exp (mm) *	-12.2	

PROTECTIVE NOTE "DIN ISO 16016" TO BE OBSERVED	EU-D	AL-T1A	US-D	US-ML	not export controlled
	REV	ECC	DATE	APPROVED	PDM Status Freigabe
	a	Neuausg			-
	b	14-0184	14.08.14	Schiff e	
				SCALE 1:1	
				MATERIAL	
				TITLE	
				<b>Rodagon F 40</b>	
				FIRST DATE NAME	
				ISSUE 05.08.08 Labarte	
				CHKD 05.08.08 Schaeffler	
				DRAWING NO.	
				<b>0703-090-100-00-0001b</b>	SHEET 1
				REPLACES	OF 1

**DIN A 4**


ALL DIMENSIONS ARE IN MM AND INCLUDE SURFACE TREATMENT




**QI OPTIQ**

# Rodagon-WA\_4/40


MTF at ratio -0.1 f/ 4.0

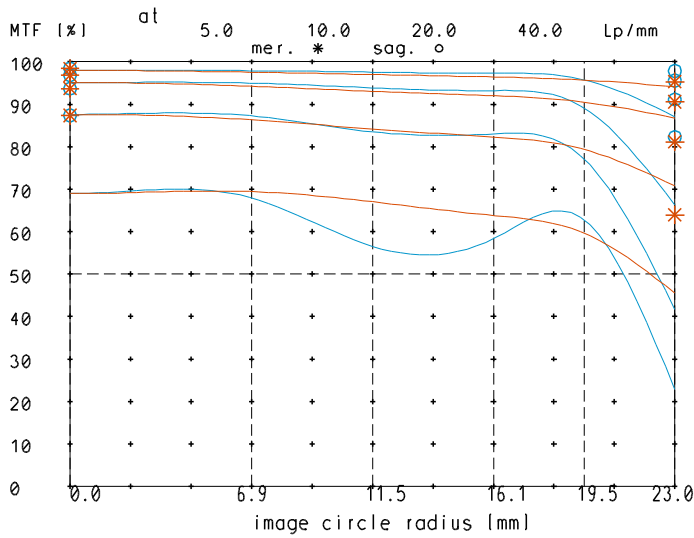


relative light fall-off at ratio -0.1

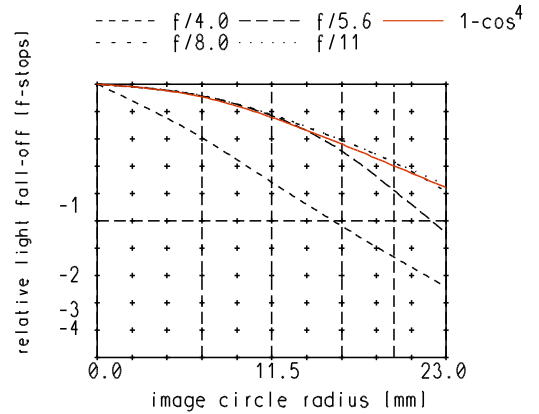

MTF at ratio -0.1 f/ 8.0

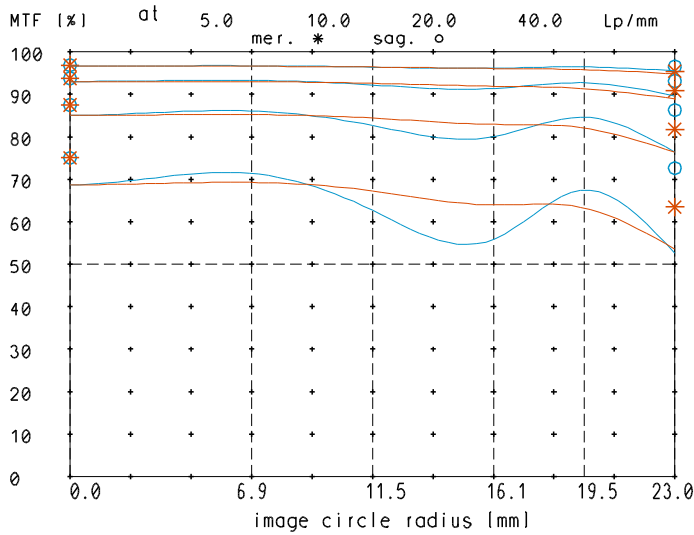


Distortion at ratio 0.05x to 0.5x

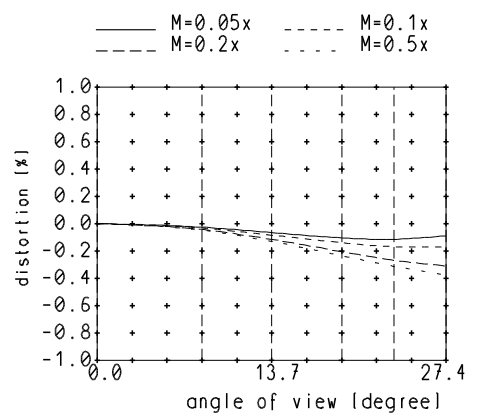

— sagittal. o Diffraction limited value  
— meridional \* Diffraction limited value

Longitudinal color aberration at ratio -0.1

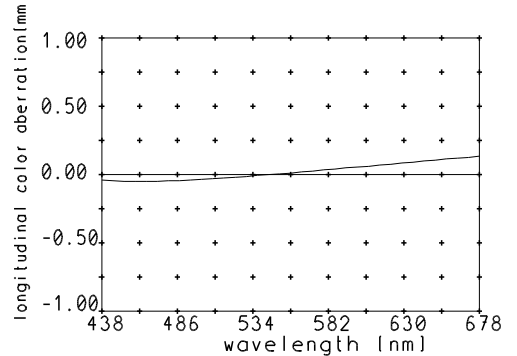

Named frequencies (line pairs/mm) in modular transfer function (MTF) as well as diagrams of relative light fall-off, distortion and longitudinal color aberration refer to film plane.