


MOTOR SPECIFICATIONS

Part Number	BL23E22-01-RO
Dimension "A" Max	2.19 in [55.5mm]
Rated Voltage	24 VDC
Rated Torque	20.53 oz-in [0.145N-m]
Rated Speed	4000 RPM
Rated Power	60 Watts
Rated Current	3.2 Amps
Peak Torque	41.07 oz-in [0.29N-m]
Peak Current	6.4 Amps
Torque Constant (kt)	6.37 oz-in/Amp
Back EMF Constant (Ke)	4.34 Vp/KRPM
Motor Constant (Km)	9.2 oz-in/√W [0.065 N-m/√W]
Resistance	0.48 Ohms
Inductance	0.45 mH
Rotor Inertia	0.81 oz-in ²
Weight	1.41 lb [0.64 kg]
Electrical Time Constant	0.9 ms
Mechanical Time Constant	3.8 ms

DIMENSIONS

PERFORMANCE CURVE

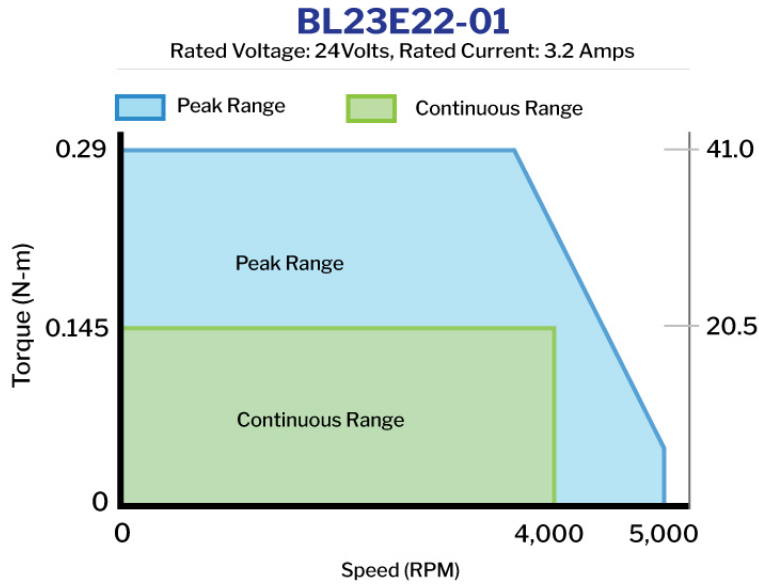

PIN OUT CHARTS

PIN #	COLOR	PHASE
1	RED	VCC (+5V)
2	YELLOW	HV
3	BLUE	HW
4	BLACK	GND
5	ORANGE	HU

PIN #	COLOR	PHASE
1	BLUE	W
2	ORANGE	U
5	YELLOW	V

RECOMMENDED PRODUCTS




BLDC DRIVER
BLDC50-BL23E22-01




BLDC EXTENSION CABLE
4201-100/300


OPERATION & USAGE TIPS




Do not disassemble motors; a significant reduction in motor performance will occur.




Do not machine shafts; this will have a negative effect on shaft run out and perpendicularity.



Do not disconnect motor from drive while in operation.



Do not use holding torque/detent torque of motor as a fail safe brake.



Do not hold motor by lead wires.



Do not exceed the rated current; this will burn the motor.

FAILURE TO COMPLY WITH THESE RECOMMENDATIONS WILL VOID ALL WARRANTY TERMS

Motion Control, **Solved.**

MOTOR ENGINEERING & MANUFACTURING



Optimized
For Your
Application



Quick
Prototype
Turnaround



Small Batch
to OEM Volume
Production



US Based
Support &
Manufacturing