

**Style** M12 Plug, shielded

4 pin A-coding

Ratings Voltage: 250 V Current: 4A

# **Operating Temperature Range**

-40 ~ 105 °C

### Materials

- (1) Insulator: Polyamide 66 (PA66), UL94 HB, black (2) Pin: C3604 brass, gold plated (3) Shell: C3604 brass, nickel plated (4) Nut: C3604 brass, nickel plated

- (5) O-ring: Nitrile rubber, black & green

# **Electrical Requirements**


Dielectric strength: 1 min @ 500 Vac Insulation resistance: 100 MΩ @ 500 Vdc Contact resistance:  $10 \text{ m}\Omega$  or less

# **Mechanical Requirements**

Life cycle: 500 mating cycles minimum

Environmental Requirements
Salt spray test: 35 °C, relative humidity 90-95%, 5% NaCl mist for 48 hrs. Wash parts after test. Maintain mechanical requirements and a contact resistance of less than 10 m $\Omega$ . Waterproof: IP67

5

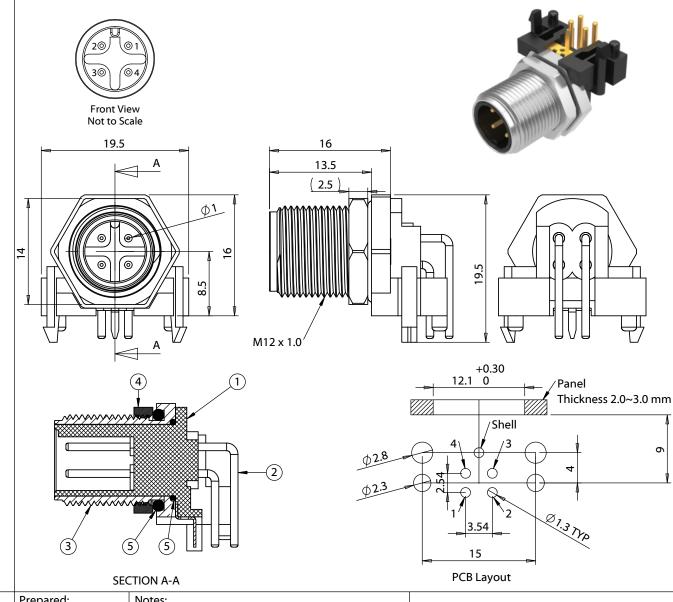

Revision:	Date:	Description:	Prepared:	Notes:						
Α	9/30/2020	Initial release		RoHS compliant			F	VSII.	ITY	
			Verified:	Function test: no open, no short circuit, no intermittent		tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com				
			Dimensions are in							
			millimeters. Tolerances:	Description: Connector, 4 pin M12 A-code plug, 12xL24.3mm, gold plated, PCB mount, 90°, PCB, IP67		Size: Part number:				
			X: ± 0.5 mm			Α	А 54-00249			
			X.X: ± 0.3 mm X.XX: ± 0.1 mm			Scale:	2:1		Sheet 1 of 1	

3