
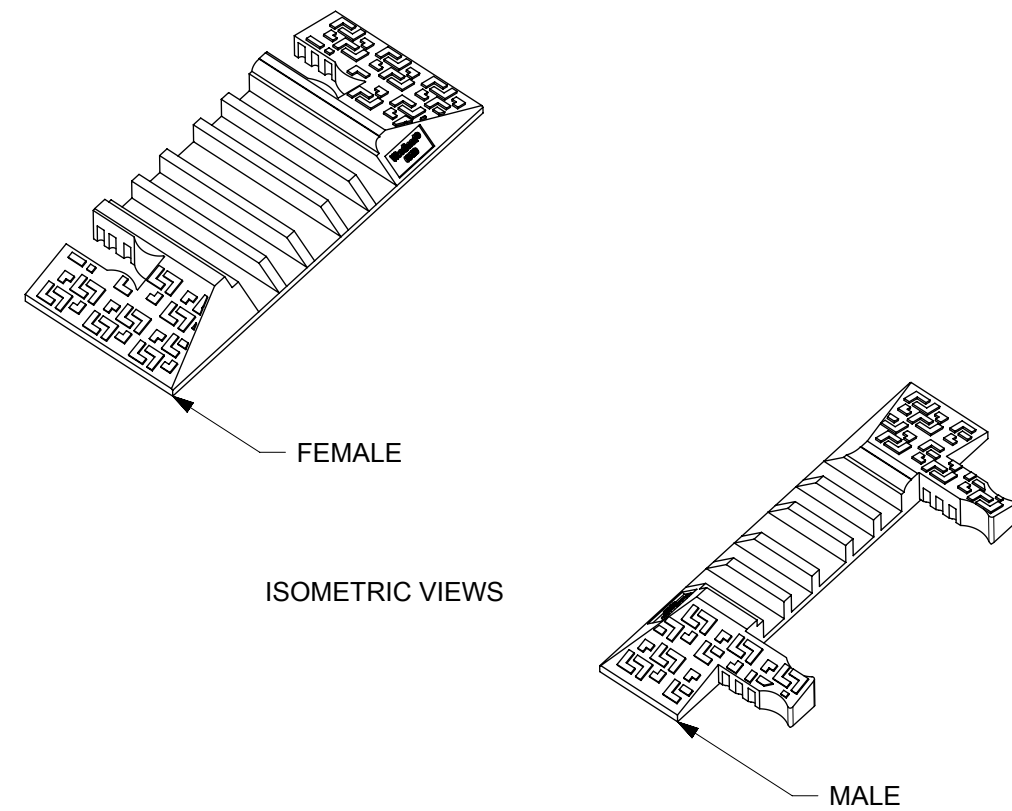
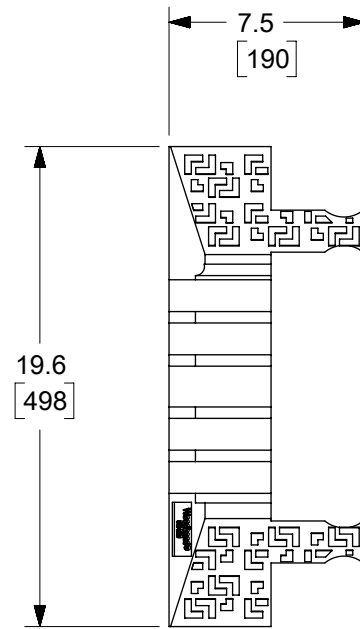


SAME DIMENSIONS FOR BOTH MALE AND FEMALE

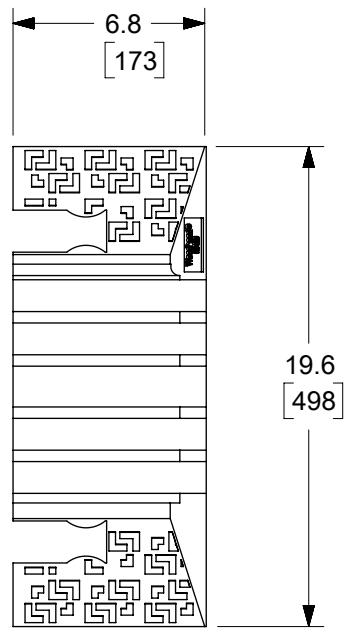

FEMALE  
ISOMETRIC VIEWS  
MALE

- NOTES:
- 1) MATERIAL: HEAVY-DUTY, NON-CONDUCTIVE POLYURETHANE, UV STABILIZED  
COLOR: BLACK
  - 2) WEIGHT:  
MALE: 3.5 LBS/ 1.6 KG ±10%  
FEMALE: 4.5 LBS/ 2 KG ±10%
  - 3) LOAD CAPACITY PER TIRE/AXLE:  
16,300 LBS PER TIRE/32,600 LBS PER AXLE AT 70°F
  - 4) OPERATING TEMPERATURE: -40°F TO 120°F (-40°C TO 48°C)
  - 5) ENGINEERING NO.: 610-END
  - 6) ROHS COMPLIANT

PENDING APPROVAL

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
DIMENSION UNITS	SCALE	CURRENT REV DESC: UPDATE NOTE 2							
INCH	1:8								
GENERAL TOLERANCES (UNLESS SPECIFIED)									
ANGULAR TOL	± 3.0°	EC NO: 174322		5 CHANNEL END CAPS, MALE & FEMALE SAFEMWAY® CABLE PROTECTOR					
4 PLACES	± 0.25	DRWN: WLEUNG 2018/03/26		PRODUCT CUSTOMER DRAWING					
3 PLACES	± 0.25	CHK'D: DNGUYEN62 2018/04/02		DOCUMENT NUMBER					
2 PLACES	± 0.25	APPR:		1301380117		DOC TYPE		DOC PART	
1 PLACE	± 0.25	INITIAL REVISION:		PSD		000		REVISION	
0 PLACES	± 0.25	DRWN: WLEUNG 2016/04/18		D					
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		APPR: BWOODMAN 2016/04/28		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
		THIRD ANGLE PROJECTION		DRAWING		SERIES		1 OF 1	
		B-SIZE		130138					

DOCUMENT STATUS	RQ	RELEASE DATE	
-----------------	----	--------------	--