



| | | | |
|--|------|-------------|----------|
| SIGN | DATE | DESCRIPTION | APPROVER |
| | | | |
| THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!! | | | |






Material:


- Housing: PBT Glass Filled (UL 94V-0)
- Color: Black
- Spring Wire: 0.35mm Diameter Phosphor Bronze
Gold Plating over Nickel on contact
Tin Plating over Nickel on solder area
- Temp. Range: -40°C/+80°C
- Durability: 500 Mating cycles Min.

Electrical:

- Current rating: 1.5A Max.
- Voltage rating: 120V AC
- Insulation Resistance: 500 MΩ Min.
- Contact Resistance: 30mΩ Max.
- Dielectric Voltage: 1,000 Vrms for 60 sec. min.

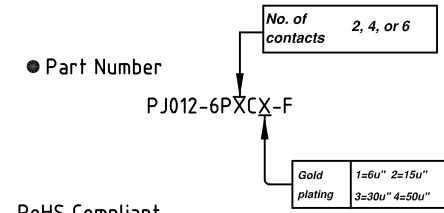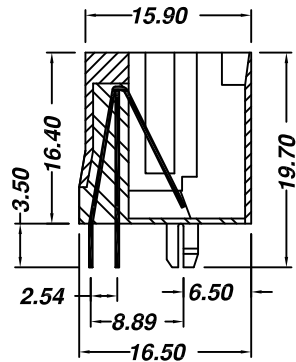

RoHS Compliant

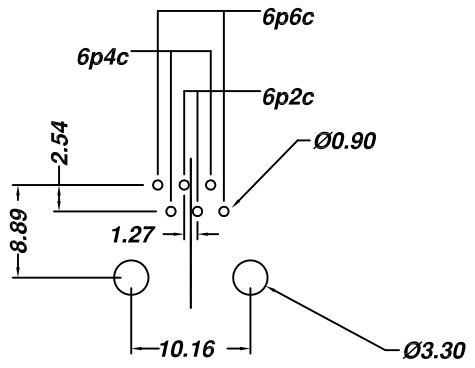

PCB LAYOUT / TOP VIEW

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.



| | | | | | |
|---------------------|---------------------|------------------------------------|----------------------|--------------|--|
| TITLE | | PJ012, 6 pos, top entry, thru hole | | | |
| PART NO. | PJ012-6PXCX-F | DWG NO. | PJ012-6PXCX-F.DWG | | |
| APPROVED | CHECKED | DESIGNED | DRAWN | CUST NO. | Tolerance |
| Billy 2008.06.01 | Johnn 2008.06.01 | Tony 2008.06.01 | Steven 2008.06.01 | | X.XX ±0.025 X.XXX ±0.13 X.XXXX ±0.05 |
| | | | | UNIT: mm | |
| | | | | SCALE: NONE | |
| | | | | REV: B | |
| | | | | SHEET: 01/01 | |