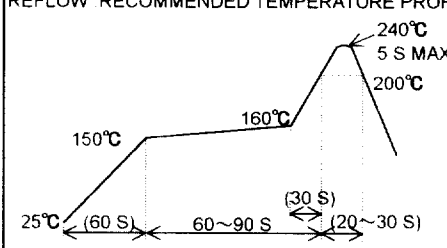


May.1.2023 Copyright 2023 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

△	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	△	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△						△					
△						△					
<b>APPLICATION STANDARD</b>											
RATING	OPERATING TEMPERATURE RANGE		-55 °C TO 85 °C			STORAGE TEMPERATURE RANGE		-10 °C TO 60 °C			
	VOLTAGE		AC 50 V			OPERATING HUMIDITY RANGE		RELATIVE HUMIDITY : 95 % MAX (NO DEW CONDENSATION IS PERMITTED)			
	CURRENT		0.3 A								
<b>SPECIFICATIONS</b>											
ITEM		TEST METHOD				REQUIREMENT				QT	AT
<b>CONSTRUCTION</b>											
GENERAL EXAMINATION		VISUALLY AND BY MEASURING INSTRUMENT.				ACCORDING TO DRAWING				X	X
MARKING		CONFIRMED VISUALLY.								X	X
<b>ELECTRICAL CHARACTERISTICS</b>											
CONTACT RESISTANCE		100 mA (DC OR 1000 Hz).				60 mΩ MAX.				X	X
INSULATION RESISTANCE		100 V DC.				100 MΩ MIN.				X	-
VOLTAGE PROOF		150 V AC FOR 1 min.				NO FLASHOVER OR BREAKDOWN.				X	X
<b>MECHANICAL CHARACTERISTICS</b>											
INSERTION AND WITHDRAWAL FORCES		MEASURED BY APPLICABLE CONNECTOR.				INSERTION FORCE: 55.2 N MAX WITHDRAWAL FORCE: 2.3 N MIN.				X	-
MECHANICAL OPERATION		50 TIMES INSERTION AND EXTRACTIONS.				1) CONTACT RESISTANCE: 70 mΩ MAX. 2) NO DAMAGE, CRACK AND LOOSENESS OF PART.				X	-
VIBRATION		FREQUENCY: 10 TO 55 Hz, SINGLE AMPLITUDE: 0.75 mm, - m/s <sup>2</sup> AT 10 CYCLES FOR 3 DIRECTIONS.				1) NO ELECTRICAL DISCONTINUITY OF 1 μs MIN. 2) NO DAMAGE, CRACK AND LOOSENESS OF PART.				X	-
SHOCK		490 m/s <sup>2</sup> DURATION OF PULSE 11 ms AT 3 TIMES FOR 3 DIRECTIONS.								X	-
<b>ENVIRONMENTAL CHARACTERISTICS</b>											
DAMP HEAT (STEADY STATE)		EXPOSED AT 40±2 °C, 90~95 %, 96 h.				1) CONTACT RESISTANCE: 70 mΩ MAX. 2) INSULATION RESISTANCE: 100 MΩ MIN.				X	-
RAPID CHAGE OF TEMPERTURE		TEMPERTURE -55→15~35→ 85→15~35°C TIME 30→ 2~ 3→ 30→ 2~ 3 min. UNDER 5 CYCLES.				3) NO DAMAGE, CRACK AND LOOSENESS OF PART.				X	-
DRY HEAT		EXPOSED AT 85 °C, 96 h.				1) CONTACT RESISTANCE: 70 mΩ MAX.				X	-
COLD		EXPOSED AT -55 °C, 96 h.				2) NO DAMAGE, CRACK AND LOOSENESS OF PART.					
CORROSION SALT MIST		EXPOSED IN 5 % SALT WATER SPRAY FOR 48 h.				NO HEAVY CORROSION.				X	-
SULPHUR DIOXIDE		EXPOSED IN 10 PPM FOR 96 h. (TEST STANDARD: JIS C 0090)				1) CONTACT RESISTANCE: 70 mΩ MAX. 2) NO HEAVY CORROSION.				X	-
RESISTANCE TO SOLDERING HEAT		REFLOW RECOMMENDED TEMPERATURE PROFILE  25°C (60 S) 150°C 160°C (30 S) 240°C 5 S MAX 200°C (20~30 S) TO BE TESTED UNDER THE ABOVE CONDITIONS.				NO MELTING OF RESIN WHICH AFFECTS THE PERFORMANCE OF COMPONENT.				X	-
SOLDRABILITY		SOLDERED AT SOLDER TEMPERATURE, 235 °C FOR IMMERSION DURATION, 2 s.				NO PINHOLE OR DEWETTING ON SOLDERED SURFACE.				X	-
REMARKS					DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED		
					<i>M. Sakuma</i> 99.10.27	<i>M. Sakuma</i> 99.10.27	<i>M. Sakuma</i> 99.10.28	<i>J. Shimizu</i> 99.10.28			
UNLESS OTERWISE SPECIFIED, REFER TO JIS C 5402.											
NOTE QT: QUALIFICATION TEST AT: ASSURANCE TEST X: APPLICABLE TEST											
<b>HRS</b> HIROSE ELECTRIC CO., LTD.				SPECIFICATION SHEET				PART NO. FX11LB - 92P - SV (22)			
CODE NO.(OLD) CL			DRAWING NO. ELC4 - 152105 - 02			CODE NO. CL 573 - 0053 - 8 - 22			1 / 1		

TO  
PCK