
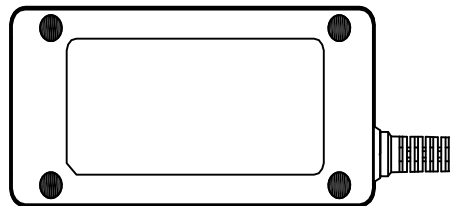
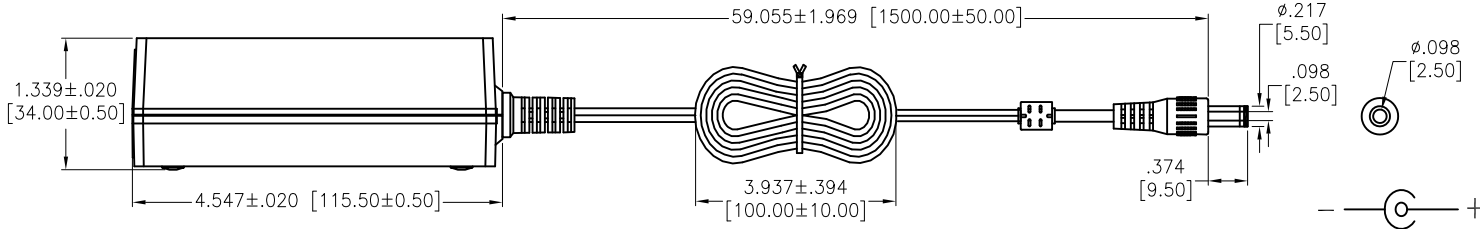
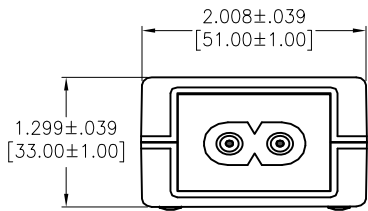


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/19/21	
A		ADDED TOLERANCE	6/10/21	WX/AC
B		UPDATE LABEL	7/19/21	WX/AC

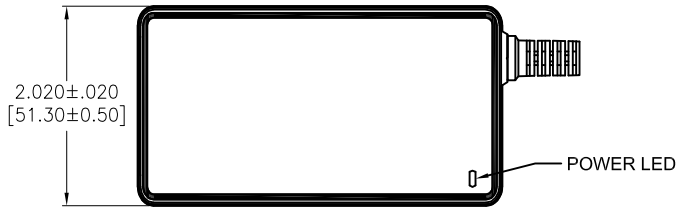

SPECIFICATIONS:

Connector
 P1: Power Adapter, IEC Female C5
 P2: DC Plug, W/Strain Relief, 5.5*2.5*9.5mm
 Overmold Color: Black PVC-45P


CABLE:
 UL2468: 22AWG*2C 80°C, Jacket Color: Black

Electrical:
Input:
 Voltage: 100Vac to 240Vac
 Current: 1.5A Max. @ 100Vac input & max load
 Frequency: 50Hz / 60Hz

Output:
 Voltage: 48V
 Current: 1.35A max.
 Load Regulation: ±5%
 Line Regulation: ±3%

Line Load Regulation-Output Rate: 48V, 1.35A
 Insulation Resistance: 100 Mohms min @ 500VDC
 Dielectric withstanding voltage (Hi-pot): 3,000V AC For 1 Minute
 Leakage Current: 0.25mA max. @ 240V AC/50Hz
 Temperature Rating:
 Operating Temperature: 0°C to +45°C
 Storage Temperature: -25°C to +85°C

Environmental:
 Lead free, RoHS compliant.

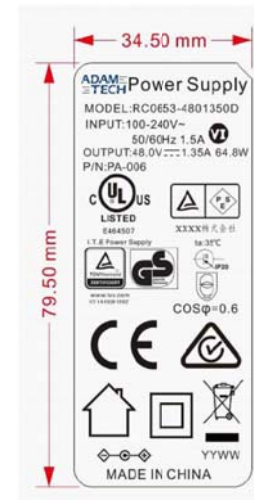

APPROVALS		DATE
DRAWN	WX	3/19/21
CHECKED	AC	3/19/21
APPROVED		

		909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
		TITLE: POWER ADAPTER, IEC C7 TO 2.5 X 5.5 X 9.5 DC PLUG, 48 VOLT, 1.35 AMP, UL2468 22AWG	
SIZE X	PART NO. PA-006	REV. B	
REF:	SCALE: NTS	SHEET 1 OF 1	

6

5

4

3

2

1

D

D

C

C

B

B

A

A

6

5

4

3

2

1