



DATE	REV	ECN	APP'D. BY
10/20/20	A0	RELEASED	ADB
-	-	-	-

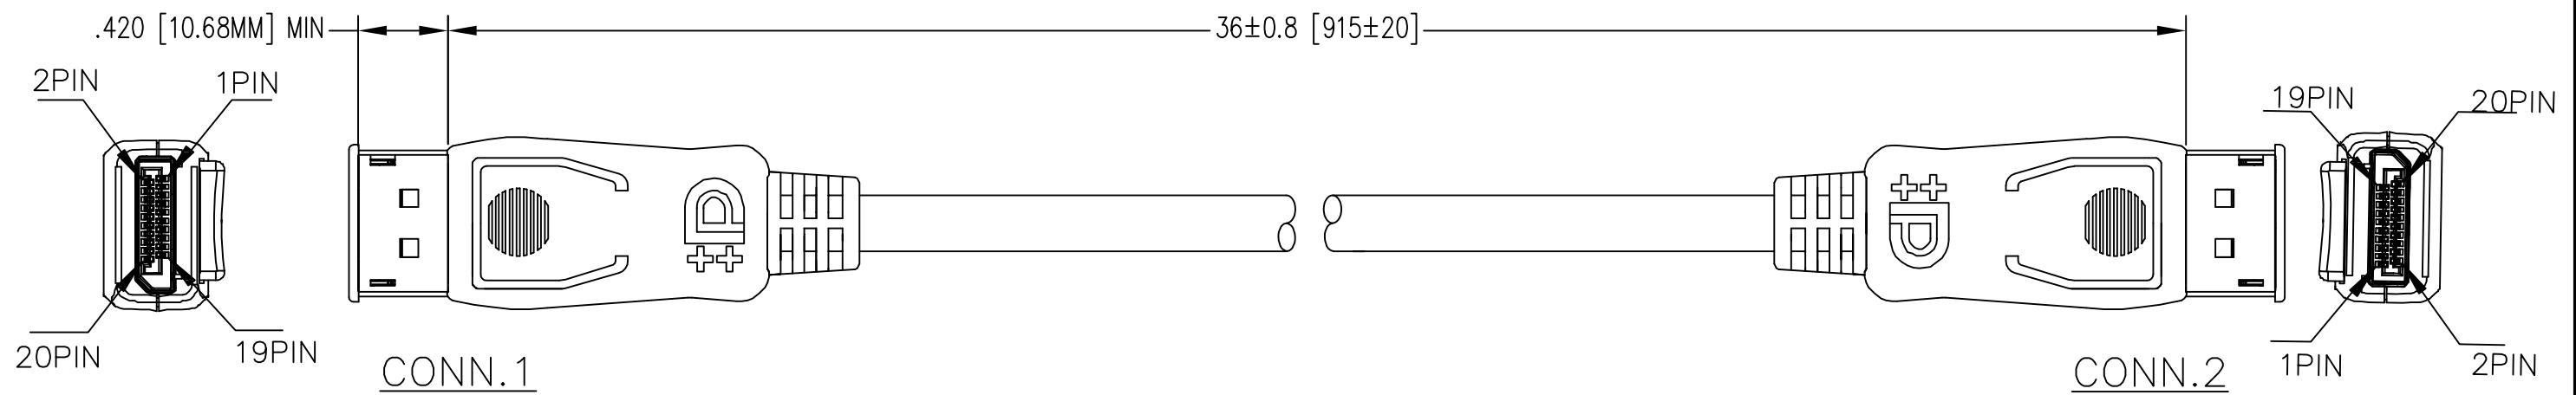


PIN ASSIGNMENT

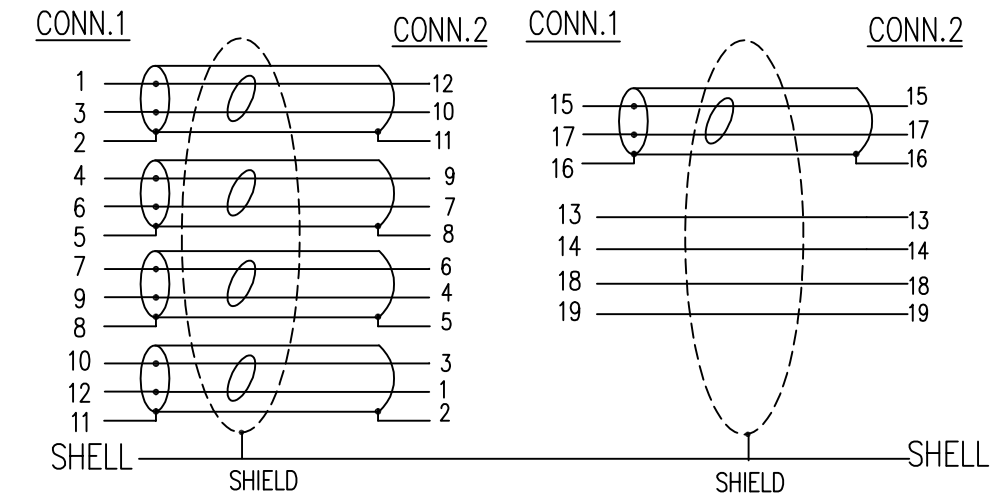

NOTES:

- COMPLIANT WITH DISPLAYPORT 1.4 SPECIFICATION.
- CONNECTOR COMPONENTS:  
 TRANSPARENT DUST COVER  
 INSIDE MOLDING: LDPE  
 STRAIN RELIEF: 45P PVC, BLACK  
 OUTSIDE MOLDING: ABS, BLACK  
 SHELL PLATING: GOLD FLASH  
 CONTACT: GOLD PLATING  
 CABLE: DP1.4  
 [32AWG(7/0.08TC)+EAM]\*5P+32AWG(7/0.08TC)\*5C+AEB(16/7/0.12 85%AL)  
 OD: 0.19 [4.8] COLOR: BLACK  
 CABLE PRINTING: DISPLAYPORT CABLE E342987 AWM STYLE 20276 80°C 30V VW-1
- ELECTRICAL TESTING:  
 100% OPEN & SHORT & CONTINUITY WIRE TEST  
 CONTACT RESISTANCE: 2 OHM MAX.  
 INSULATION RESISTANCE: 10M OHM MIN.  
 HI-POT:100V DC/10ms
- PACKAGING:  
 ONE CABLE PER BAG



P/N	LENGTH
BC-4D4D003F	36 [915]

THIRD ANGLE PROJECTION

DO NOT SCALE DRAWING  
 DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE

DIMENSIONS: INCHES [METRIC]


UNLESS OTHERWISE SPECIFIED  
 TOLERANCES ARE ±.005 [0.13]  
 ANGLES ARE ± 1°

SHEET NO. 1 OF 1

206 Van Vorst Street  
 Jersey City, NJ 07302  
 +1 201 432 0463  
<http://www.belfuse.com>

TITLE: DISPLAY PORT 1.4 CABLE, MALE TO MALE, 3 FEET

DRN BY: JE	DATE 10/07/20
APPD BY: ADB	DATE 10/20/20
DWG NO. CT999225	REV. A0



ASSEMBLY FORMAT REV. 6/3/05