



Stainless Steel Sleeve (c)

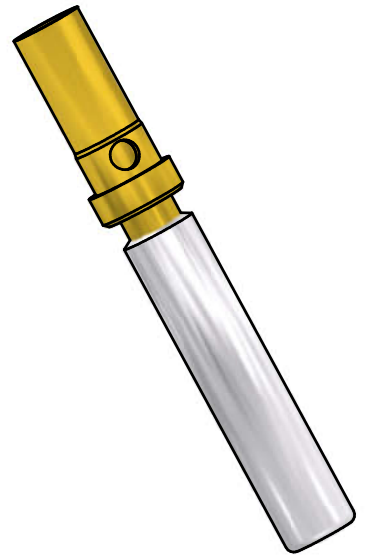

(b) STRIPPING DIMENSIONS

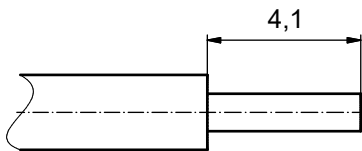

Plating	Part no.
GOLD FLASH over NICKEL	<b>132A15019X</b>
min. 30µin HARD GOLD over min. 50µin NICKEL	<b>132C15019X</b>
min. 50µin HARD GOLD over min. 50µin NICKEL	<b>132J15019X</b>

NOTES:

- MATERIAL: COPPER ALLOY
- PLATING: SEE TABLE
- CRIMPING: USE CRIMP TOOL 360X10329X WITH TOOL INSERT 360X20039X  
SELECTOR SETTINGS: 7 FOR AWG 20  
6 FOR AWG 22  
5 FOR AWG 24

RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.  
OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name	tolerance	ISO 2768-m	dim. in mm
1 x f	Ä20-0464	10.11.20	Lehm. drawn	30.01.02	Parei	
2 x e	Ä 4145	26.10.11	Lehm. appd.	30.01.02	Mickenbecker	
6 x d	Ä 2532	12.07.06	HS	norm		
2 x c	Ä 2193	21.03.05	Lehm. d-old			
2 x b	Ä 2177	02.03.05	Lehm.			
a	Original					

scale:	10:1
material:	SEE NOTES
title:	<b>SIGNAL CRIMP CONTACT</b> SOCKET CONTACT Wire Size 20-24
dwg no:	Inventor 10 (d) DIN-A3 sh: 1
part no:	<b>16K1A471A</b>
part no:	SEE TABLE

