




MT16/16-ASJL-A

Ruland Adjustable Two-Way Spring Joint, Clamp 16mm, Height 112mm, Lever Length 78mm, Aluminum

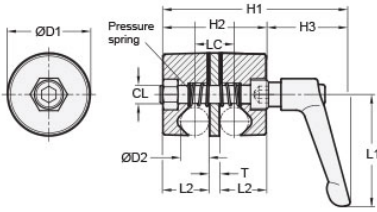


Description

Ruland MT16/16-ASJL-A is an adjustable two-way spring joint with a 16mm clamping diameter, M10 clamp screw, 46mm base diameter, 78mm lever length, and 57mm overall length. It is designed to mate Ruland MT16 or the user's own round tubes and rods via a V-groove, allowing a greater tolerance to be bridged. MT16/16-ASJL-A is aluminum, the lever is zinc die-cast with a plastic coating, and the inserts are stainless steel for use in most industrial applications. It is used in mounting systems for sensors, screens, reflectors, plexiglass machine guards, and other industrial components. The spring is made tighter or looser by adjusting the clamping lever allowing the user to rapidly adjust tubes as needed. MT16/16-ASJL-A is manufactured by Otto Ganter, inventoried by Ruland, and RoHS3 compliant..

Product Specifications

| | | | |
|----------------------|-----------------------|------------------------|--------------|
| Clamping Diameter D2 | 16 mm | Base Diameter D1 | 46 mm |
| Lever Length L1 | 78 mm | Lever Height H3 | 55 mm |
| Body Height H2 | 57 mm | Overall Height H1 | 112 mm |
| Surface To Edge L2 | 25.5 mm | Center To Center LC | 22 mm |
| Spacer Thickness T | 6 mm | Clamp Screw CL | M10 |
| Weight (lbs) | 0.781100 | Material Specification | Aluminum |
| Manufacturer | JW Winco/ Otto Ganter | UPC | 634529230008 |
| Country of Origin | Taiwan | Tariff Code | 7609.00.0000 |
| UNSPC | 31162908 | | |

Note 1 Performance ratings are for guidance only. The user must determine suitability for a particular application.

Prop 65  **WARNING** This product can expose you to chemicals including Soots and Nickel (metallic), known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.