


molex

INSULATION DISPLACEMENT CABLE: 0.0394" PITCH, 28 AWG, STRANDED EXTRUDED FEP

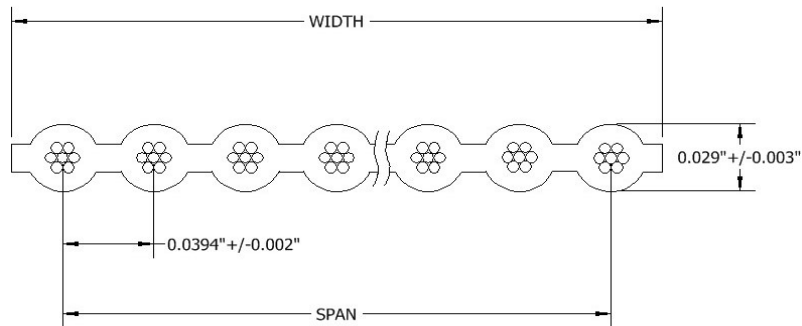

Cond. No.	Part Number	Span	Width
4	1000570197	$0.118'' \pm 0.005''$	$0.158'' \pm 0.007''$
5	1000570424	$0.158'' \pm 0.005''$	$0.197'' \pm 0.007''$
6	1000570082	$0.197'' \pm 0.007''$	$0.237'' \pm 0.007''$
8	1000570218	$0.276'' \pm 0.007''$	$0.315'' \pm 0.007''$
10	1000570140	$0.354'' \pm 0.007''$	$0.394'' \pm 0.007''$
10	1000570141	$0.354'' \pm 0.007''$	$0.394'' \pm 0.007''$
12	1000570145	$0.433'' \pm 0.007''$	$0.472'' \pm 0.007''$
12	1000570146	$0.433'' \pm 0.007''$	$0.472'' \pm 0.007''$
14	1000570149	$0.512'' \pm 0.007''$	$0.551'' \pm 0.007''$
14	1000570426	$0.512'' \pm 0.007''$	$0.551'' \pm 0.007''$
16	1000570155	$0.590'' \pm 0.007''$	$0.630'' \pm 0.007''$
16	1000570156	$0.590'' \pm 0.007''$	$0.630'' \pm 0.007''$
20	1000570161	$0.748'' \pm 0.010''$	$0.787'' \pm 0.010''$
20	1000570162	$0.748'' \pm 0.010''$	$0.787'' \pm 0.010''$
24	1000570168	$0.906'' \pm 0.010''$	$0.945'' \pm 0.010''$
26	1000570173	$0.984'' \pm 0.010''$	$1.024'' \pm 0.010''$
26	1000570174	$0.984'' \pm 0.010''$	$1.024'' \pm 0.010''$
30	1000570179	$1.142'' \pm 0.010''$	$1.181'' \pm 0.010''$
30	1000570180	$1.142'' \pm 0.010''$	$1.181'' \pm 0.010''$
34	1000570185	$1.299'' \pm 0.010''$	$1.338'' \pm 0.010''$
34	1000570474	$1.299'' \pm 0.010''$	$1.338'' \pm 0.010''$
40	1000570192	$1.535'' \pm 0.010''$	$1.575'' \pm 0.010''$
40	1000570193	$1.535'' \pm 0.010''$	$1.575'' \pm 0.010''$
44	1000570200	$1.693'' \pm 0.010''$	$1.732'' \pm 0.010''$
44	1000570201	$1.693'' \pm 0.010''$	$1.732'' \pm 0.010''$
50	1000570202	$1.929'' \pm 0.010''$	$1.968'' \pm 0.010''$
50	1000570203	$1.929'' \pm 0.010''$	$1.968'' \pm 0.010''$

CHARACTERISTICS	
Conductor	28 AWG, 7/36, Silver Plated Copper
Insulation	FEP
Color	Blue Or Blue with Blue Polarity Stripe
Impedance (ohms)	105 Unbalanced
Capacitance (pF/ft)	11.5 Unbalanced
Inductance (uH/ft)	0.12 Unbalanced
Insulation Resistance (Mohm)	>500
Voltage Rating	300V
Temperature Rating	-55°C to 200°C

STANDARD PACKAGING

100 ft./spool, 10 Ft. minimum length

UL STYLE 20424