

TECHNICAL DATA SHEET

F727.754.100


LC DUPLEX APC SINGLEMODE ADAPTOR ZIRCONIA ALIGNMENT SLEEVE

Packaging 100

Series LC Issue 03/26/04

Page 1/2

Adaptor : color GREEN Duplex

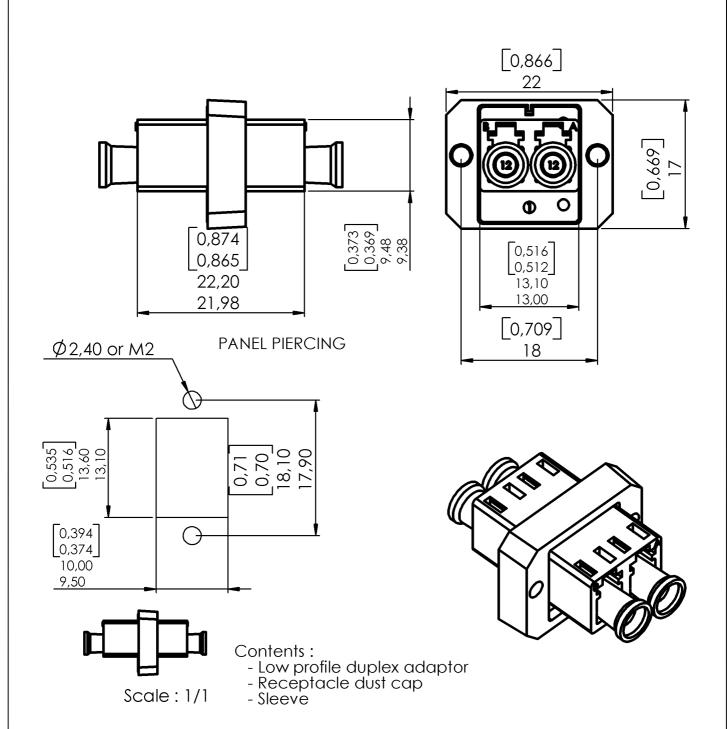

Original dimensions in mm [inch]



TECHNICAL DATA SHEET

F727.754.100

LC DUPLEX APC SINGLEMODE ADAPTOR ZIRCONIA ALIGNMENT SLEEVE

Packaging 100

Series LC Issue 03/26/04

Page 2/2

Adaptor : color GREEN Duplex

GENERAL

□ **TYPE** IEC 61754-20 (LC)

RJ-45 latching system Receptacle color : GREEN

■ **MOUNTING** SC panel cut-out screw in

Max. panel thickness 1.7 mm

□ ALIGNMENT SLEEVE Zirconia

CHARACTERISTICS (Depending on fibre or cable construction)

□ MATERIAL Plastic molded: Material in accordance with TELCORDIA GR-326 CORE

Inflammability V0 (UL 94)

□ **MECHANICAL** Durability 200 cycles

Plug Retention 68 N

■ ENVIRONMENTAL Storage temperature range -40 °C to +85 °C

Operating temperature range $-40 \, ^{\circ}\text{C} \text{ to } +70 \, ^{\circ}\text{C}$

□ PROOF TEST Straight pull 68 N

Side pull 23 N

□ VIBRATION TEST 10 to 55 Hz, 1,5 mm (peak to peak), 2 Hr/axis

(Performance and specification : see document GEN - F727 001)