



Electrical Specifications

Center Frequency: 28000 MHz
Bandwidth: 600 MHz
Pass Band: 27700-28300 MHz
Insertion Loss: 2.0 dB Max
VSWR: 1.50:1 Max
Rejection: ≥40 dB @ 28750 MHz


Mechanical

Connector Type: WR28
Dimensions: 3.36 x 0.75 x 0.75 Inches

Environmental

Operating Temperature: -45 to +85° C
Storage Temperature: -55 to +125° C
Shock: 20 G. 11 ms
Vibration: 20 G. 5 to 200 MHz

Outline Drawing:

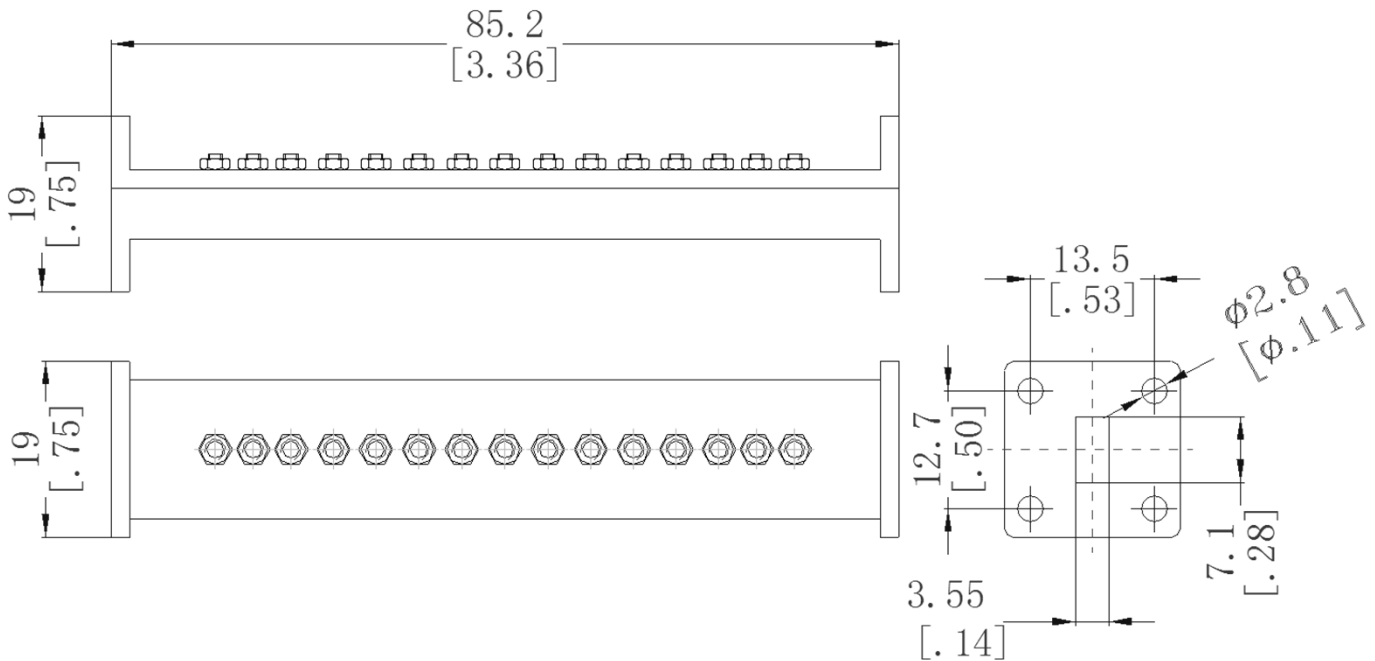



Response Plot:

