


May.1.2023 Copyright 2023 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

ELV. RoHS COMPLIANT

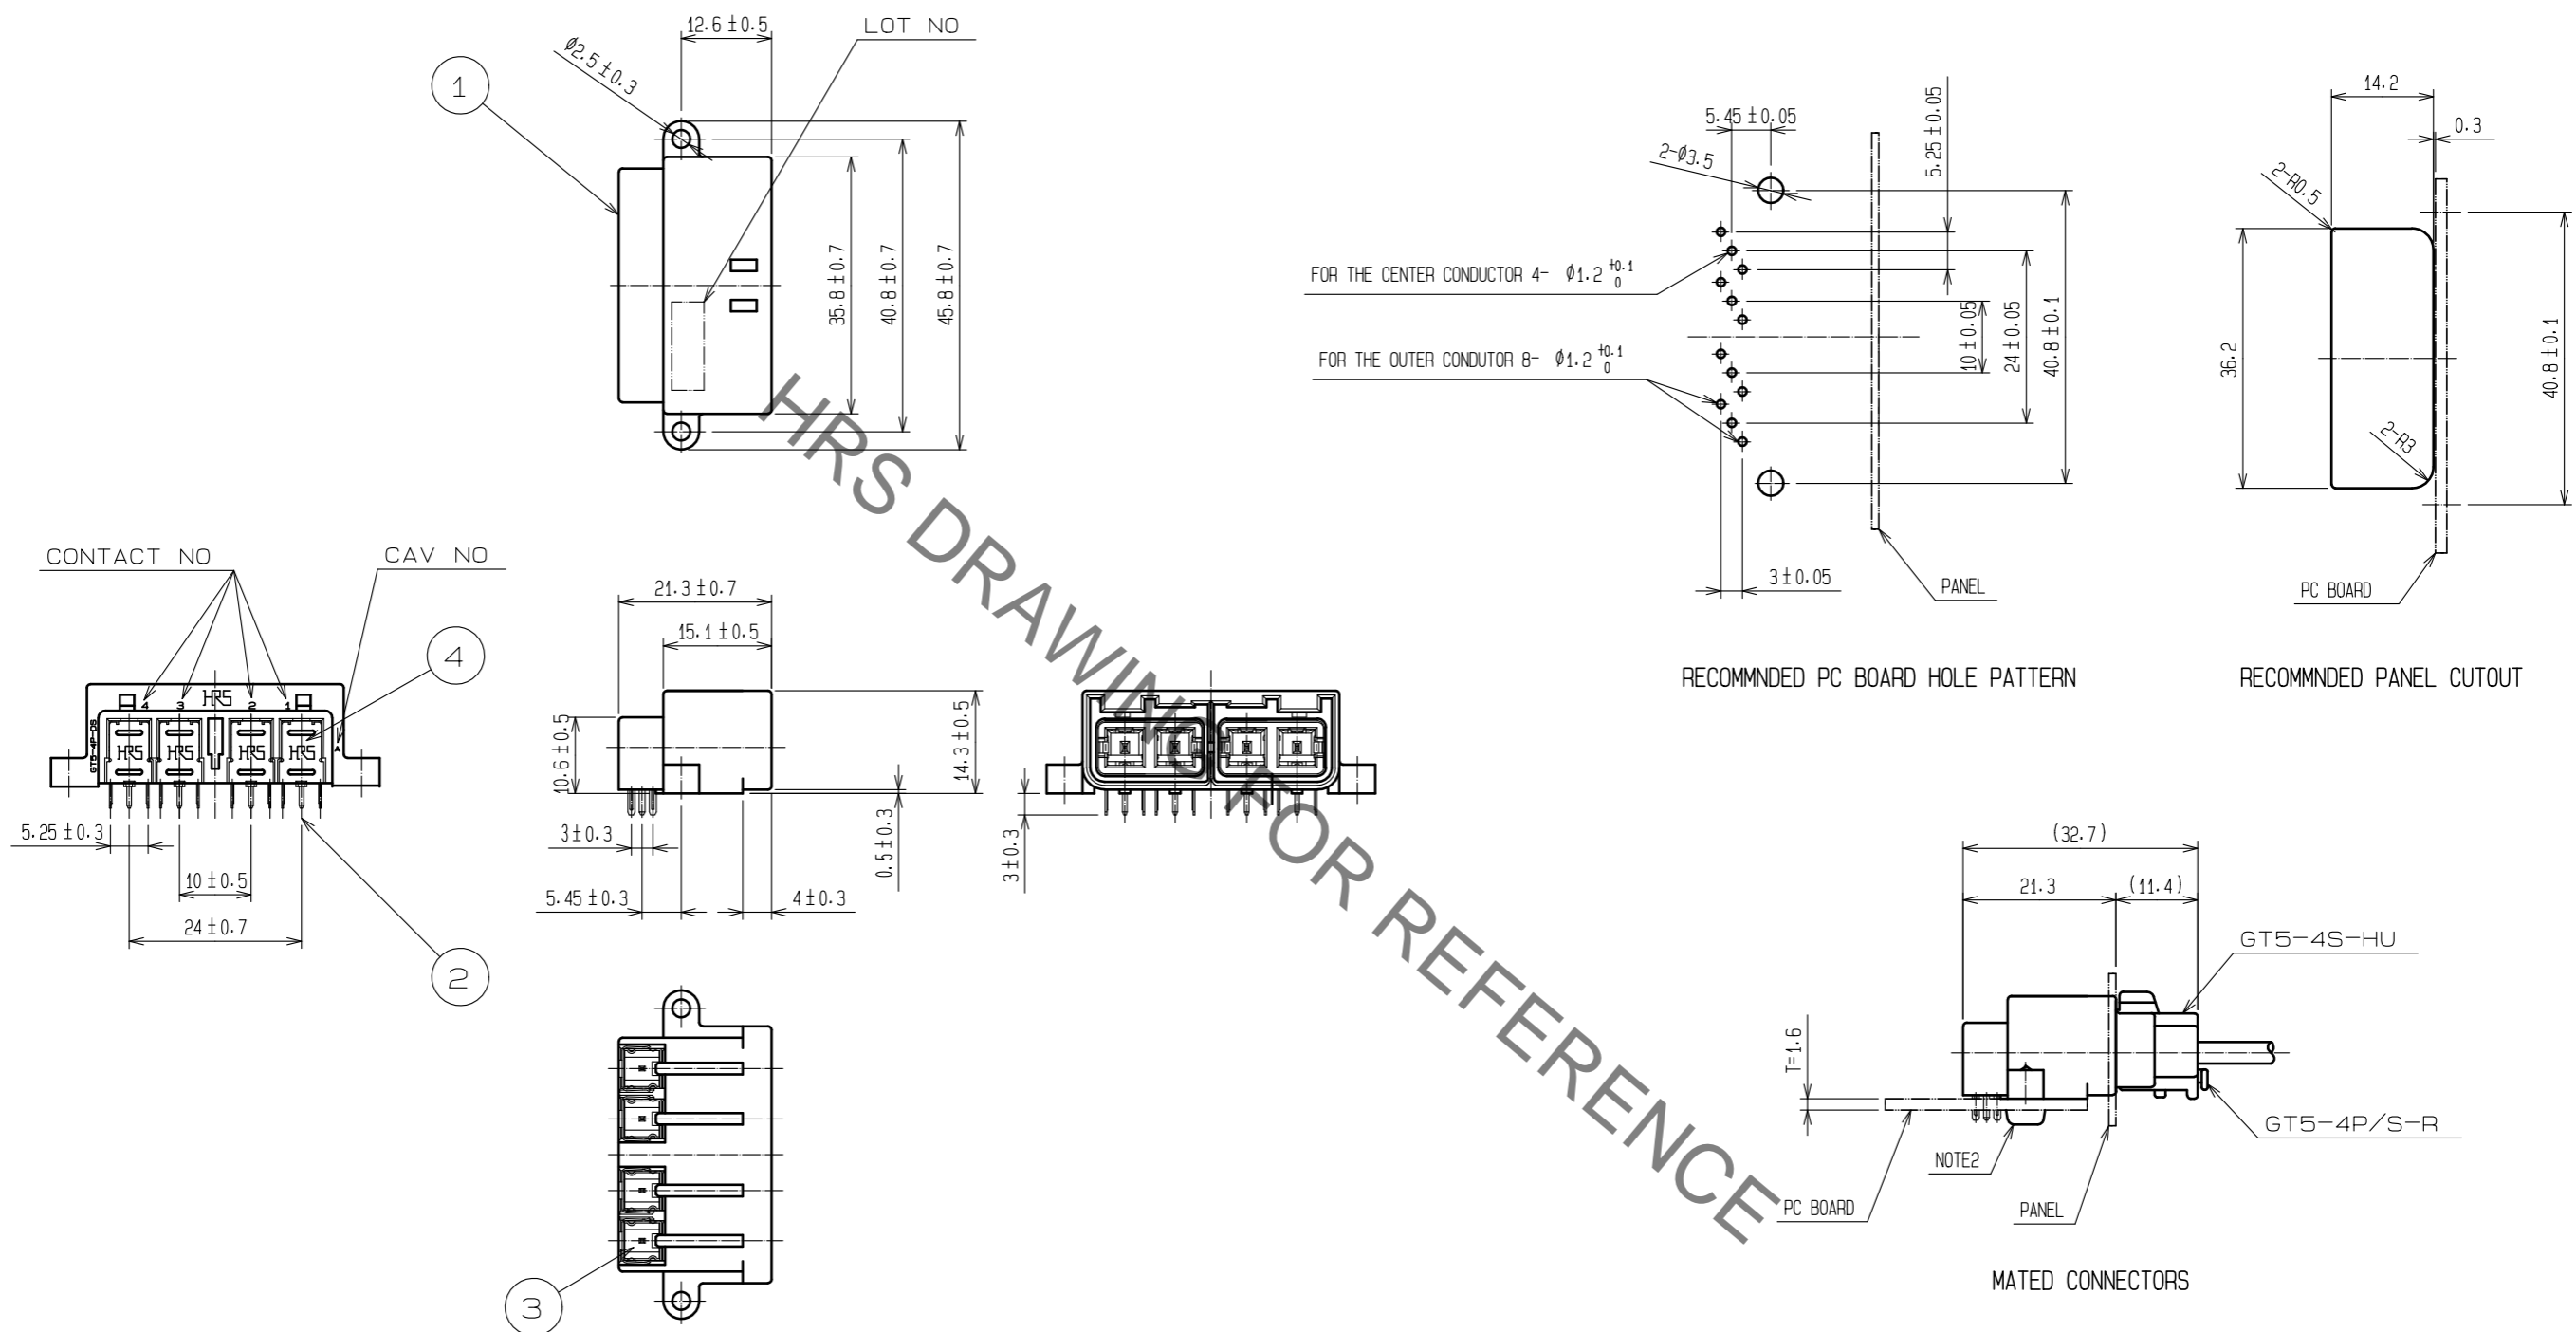

- NOTE1. DEPENDING ON THE CIRCUMSTANCES RECESS OF WELDING SHALL BE ADDED TO MOLD TO PREVENT SINKAGE.
- ⚠ 2. FIXING SCREW SHALL BE NOMINAL DIAMETER 3mm IN ACCORDANCE WITH CLASS 1 OR 4 OF JISB1115, 1122. DO NOT USE ANY SCREWS OTHER THAN THE RECOMMENDED ONES.
3. APPLICABLE CONNECTOR: GT5-4S-HU (CL755-0056-0)
- ⚠ 4. INSTALL THE SCREWS PERPENDICULARLY TO THE BOARD.

2	BRASS	TIN PLATED	4	PHOSPHOR BRONZE	TIN PLATED
1	PBT	UL94HB, LIGHT GRAY	3	PBT	UL94V-0, DARK GRAY
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
UNITS	mm	SCALE	1:1	COUNT	2
		DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
		DIS-T-00008754	KN. MIKAMI	MO. OKADA	20210326
APPROVED: KS. SATOH		20080611	DRAWING NO. EDC3-165614-01		
CHECKED: NH. NAKATA		20080610	PART NO. GT5-4P-DS(70)		
DESIGNED: MO. OKADA		20080609	CODE NO. CL0755-0087-4-70		
DRAWN: MH. SHOUJI		20080522	1/1		