
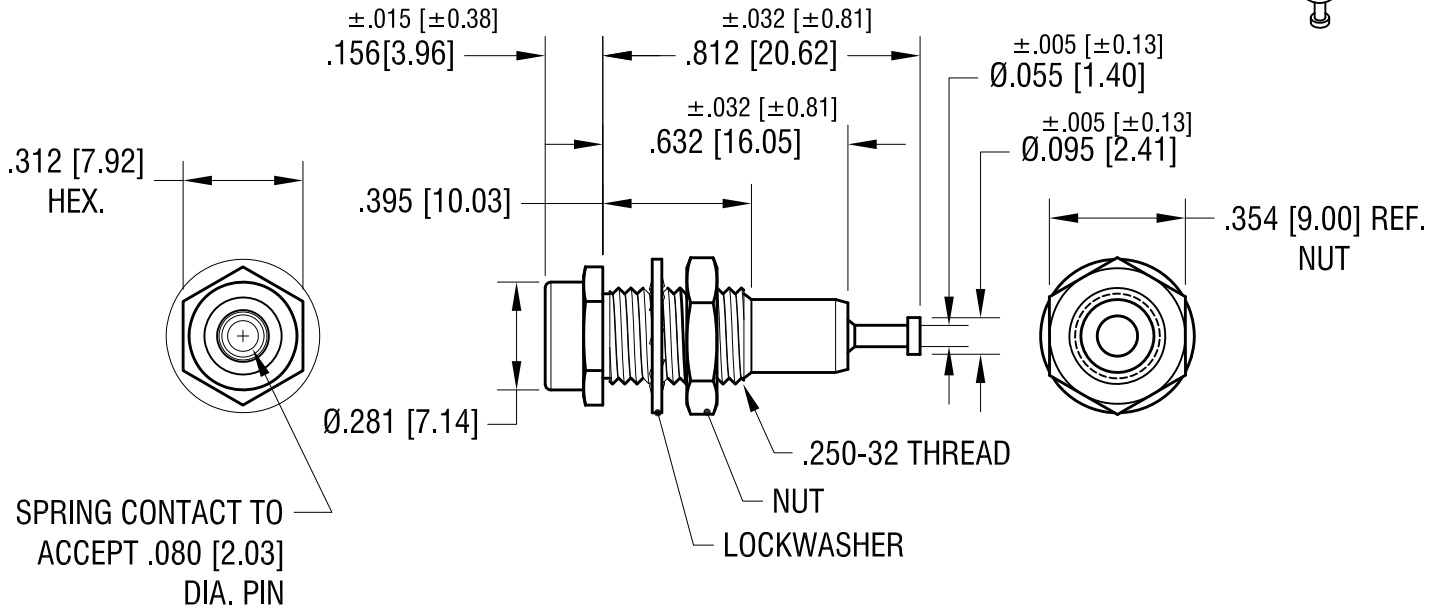


THIS DOCUMENT IS THE PROPERTY OF KEYSTONE ELECTRONICS CORP. AND SHALL NOT BE REPRODUCED, DISTRIBUTED OR USED AS A BASIS FOR MANUFACTURE WITHOUT PRIOR WRITTEN PERMISSION FROM KEYSTONE ELECTRONICS CORP.

RATINGS:

CURRENT: 10 AMPS
 BREAKDOWN VOLTAGE: 5700 V RMS
 CONTACT RESISTANCE: 0.004 OHMS MAX.
 CONTACT-TO-PANEL C: 2 pF NOMINAL

ACTUAL SIZE



NOTES:

1. CONTACT:
 MAT'L - BRASS BODY WITH WRAP AROUND BERYLLIUM COPPER GOLD PLATE
2. INSULATOR:
 MAT'L - NYLON 6/6 PER ASTM D4066
3. SHELL, NUT/WASHER:
 BRASS, NICKEL PLATE. HARDWARE SUPPLIED UNASSEMBLED.

PART NO.	COLOR
6012	WHITE
6013	RED
6014	BLACK
6015	GREEN
6016	YELLOW
6017	BLUE

3.30.23	NUT WAS 8.71mm±0.15mm GENERAL TOLERANCE WAS ±.005 CHANGE AS PER ECN 23-041	B
2.05.03	CHANGE AS PER ECN 03-011	A
DATE	DESCRIPTION	REV.

KEYSTONE ELECTRONICS CORP.
 www.keyelco.com • NEW HYDE PARK NY 11040 • Tel (516)328-7500

PART NAME
INSULATED METAL-CLAD TIP JACK

MATERIAL
AS NOTED

FINISH AS NOTED	DRN BY	BOONE	DATE	12.07.82
	APP'D	RH	SCALE	2X

TOLERANCES INCH [MM]
 DECIMAL ±.010 [±0.25]
 ANGULAR ± 1°
 UNLESS OTHERWISE SPECIFIED

CODE
C

DWG NO.
6012 - 6017