


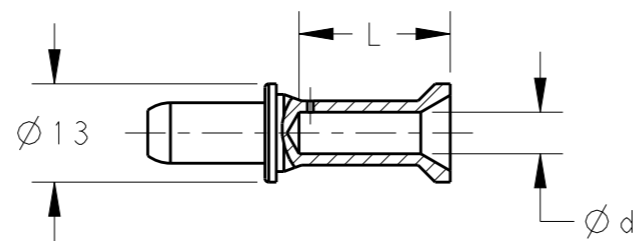


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	25JUN2015	DW	CW

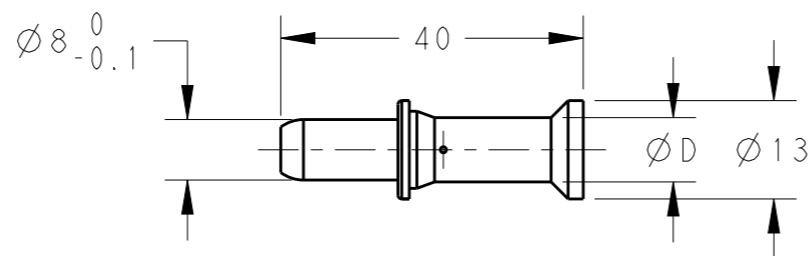

1)  $\phi d = 4.3, 5.5, 7.0$




NOTES:




- TECHNICAL CHARACTERISTICS:  
 CONTACT MATERIAL: BRASS  
 SURFACE PLATING:  
 SILVER PLATING:  $\geq 2\mu m$   
 CONTACT RESISTANCE:  $\leq 0.5m\Omega$   
 WIRE RANGE: SEE TABLE  
 OPERATION TEMPERATURE:  $-40\sim+125^{\circ}C$

注释:

- 技术参数:  
 公针材料: 黄铜  
 表面电镀:  
 镀银:  $\geq 2\mu m$   
 接触电阻:  $\leq 0.5m\Omega$   
 接线范围: 见表格  
 工作温度:  $-40\sim+125^{\circ}C$




2)  $\phi d = 8.2$

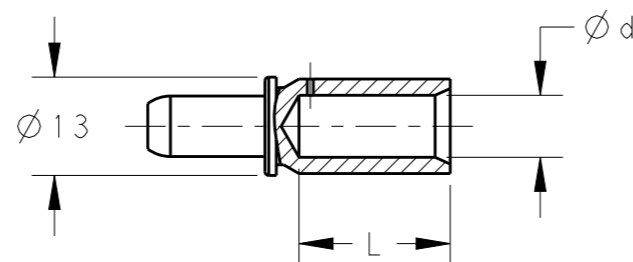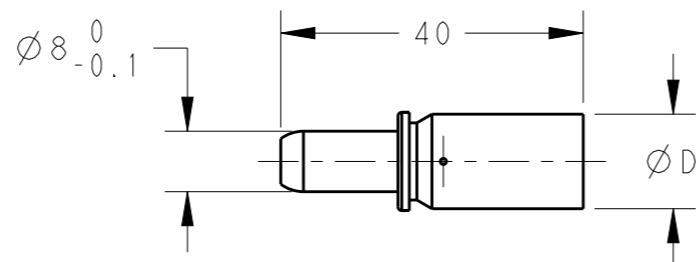

PART NUMBER	$\phi d$	$\phi D$	WIRE GAUGE	STRIPPING LENGTH L (mm)
T2050001010-000	4.3	5.6	10	20
T2050001016-000	5.5	8.5	16	
T2050001025-000	7.0	10.0	25	
T2050001035-000	8.2	12.5	35	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm



TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	$\pm$
1 PLC	$\pm$
2 PLC	$\pm$
3 PLC	$\pm$
4 PLC	$\pm$
ANGLES	$\pm$

MATERIAL: -

FINISH: -

DWN: 25JUN2015 David Wang  
 CHK: 25JUN2015 Chris Wang  
 APVD: 25JUN2015 Xiang Xu

PRODUCT SPEC: 108-137058  
 APPLICATION SPEC: 114-137058  
 WEIGHT: -



NAME: CNM PIN CONTACT

SIZE: A3	CAGE CODE: 00779	DRAWING NO: T20500010XX000	RESTRICTED TO: -
Customer Drawing		SCALE: 1:1	SHEET: 1 OF 1 REV: A