

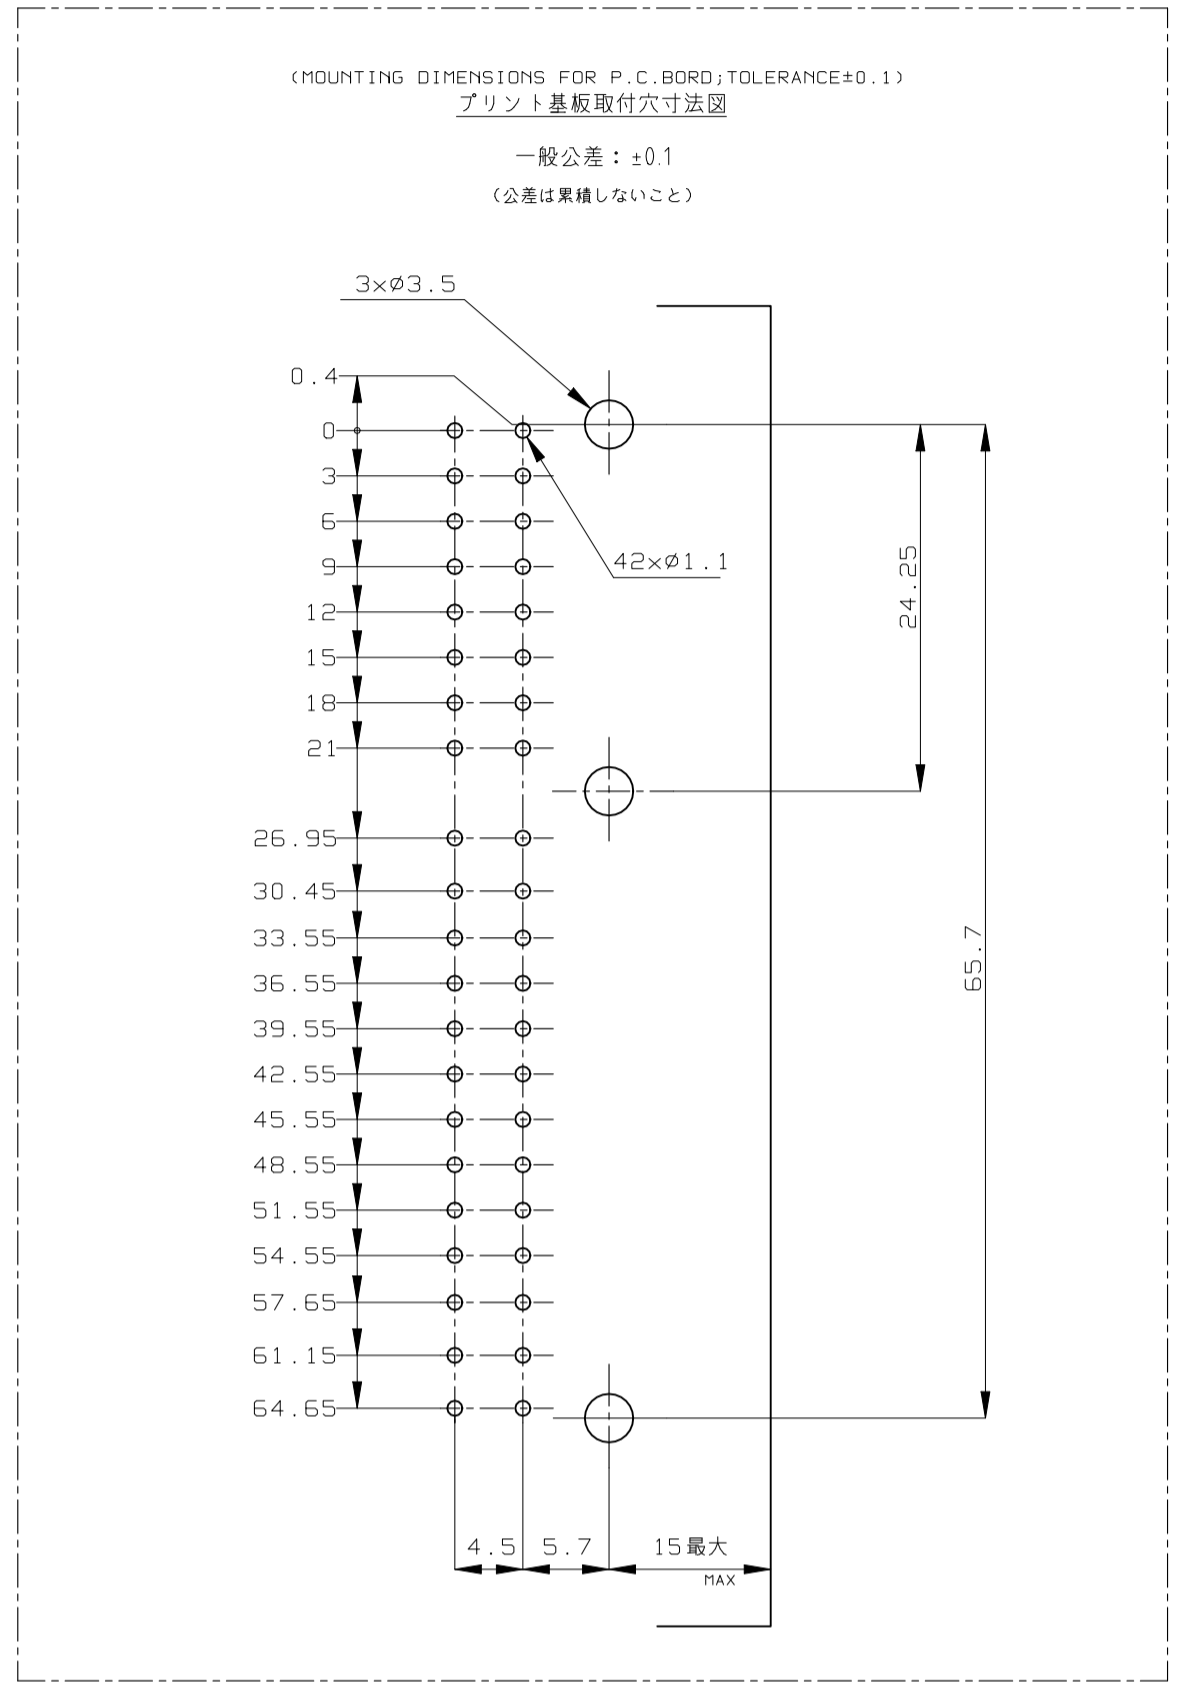



REVISIONS					
REV	DATE	DESCRIPTION	BY	CHK	APPV
N10	07JAN2019	REVISIED PER ECR-18-015766	TS	YN	
N11	29NOV2022	REVISIED PER ECR-22-154022	RK	MT	

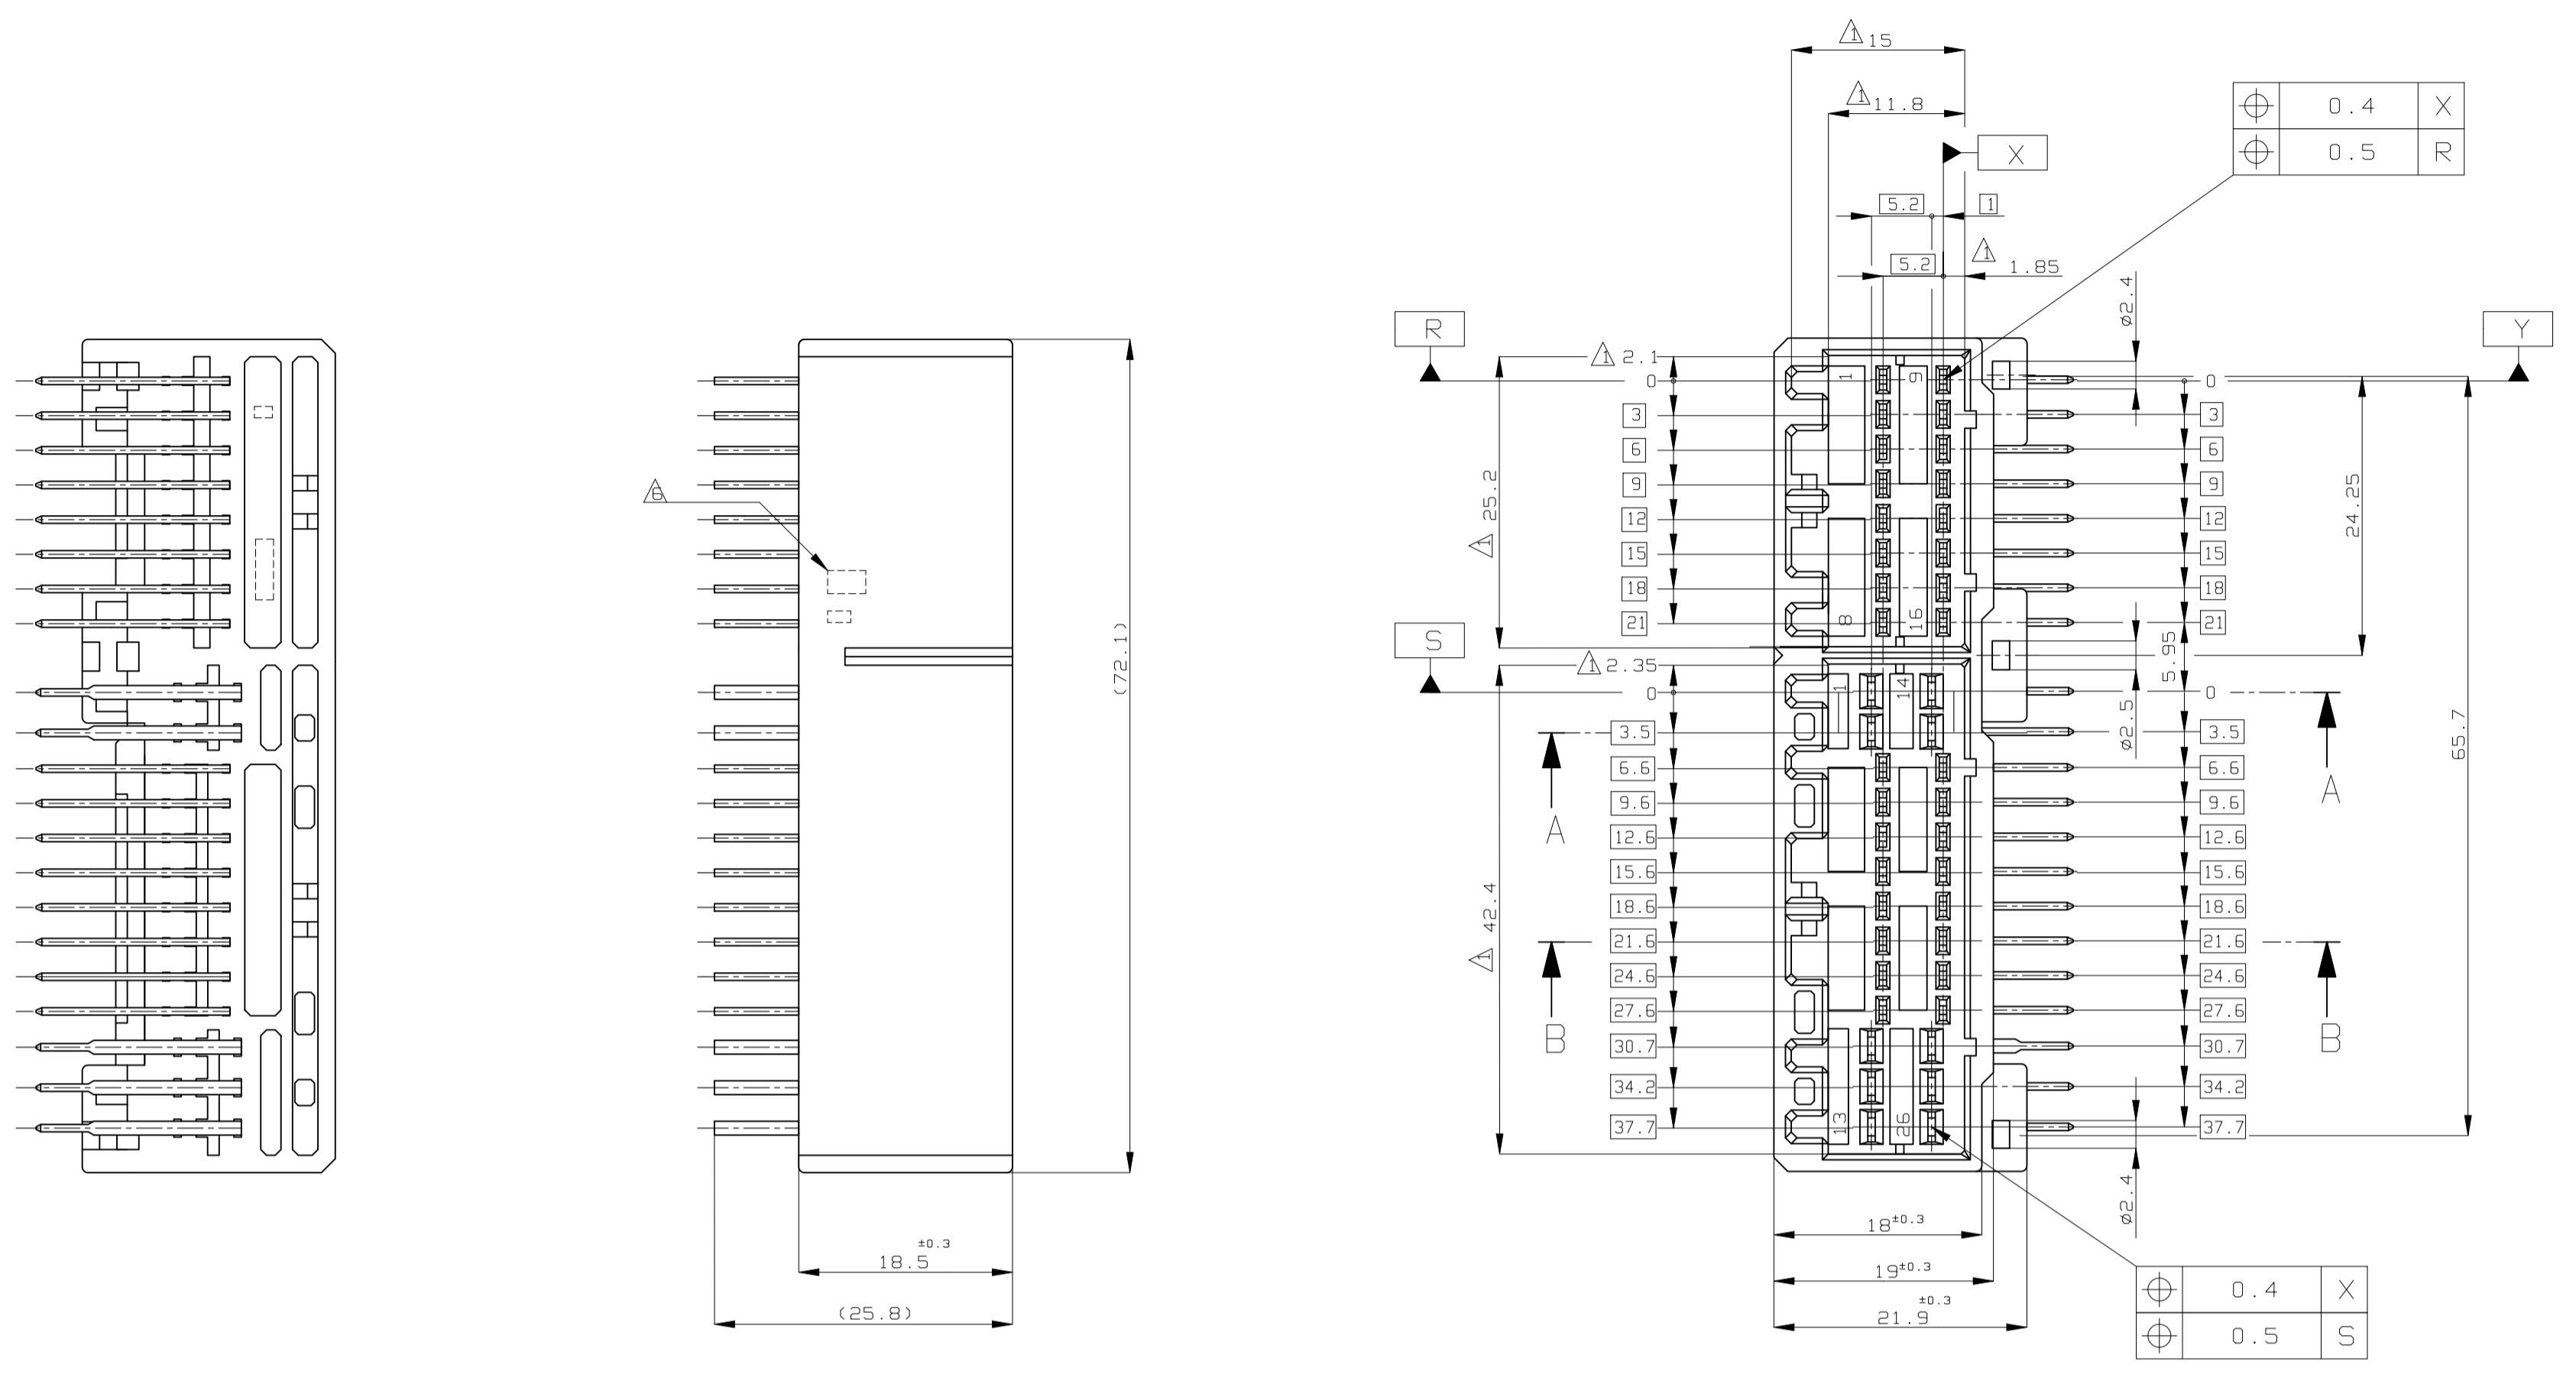

- △ □ 面から2mmの範囲で測定
- 2 嵌合相手ハブジャック型 174514, 174516, 917981, 917992
- 3 推奨取付ねじ: JIS B1115, B1122 タッピングねじ, なべ2種
呼び径3, 長さ6mm以下 (締付けトルク: 0.4N-m (4kg-cm) 以下)
- 4 適用製品規格番号: 108-5280, 5342

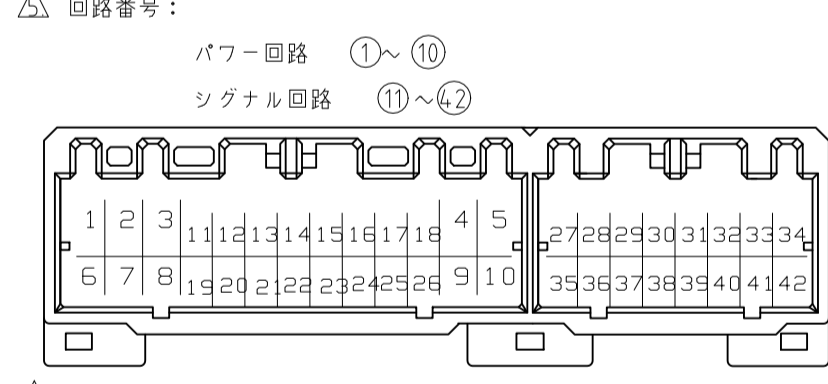

- △ MUST BE KEPT BETWEEN □ Z AND 2
- 2 THE MATING PLUG HSG. PART NUMBER; 174514, 174516, 917981, 917992
- 3 RECOMMENDED MOUNTING SCREW; 3mm DIA, 6mm LENGTH (MAX.)
PAN HEAD, CLASS 2 TAPPING SCREW SPECIFIED IN JIS B1115, B1122
(TIGHTENING TORQUE: 0.4N-m (4kg-cm) MAX.)
- 4 APPLICABLE PRODUCT SPEC NO; 108-5280, 108-5342

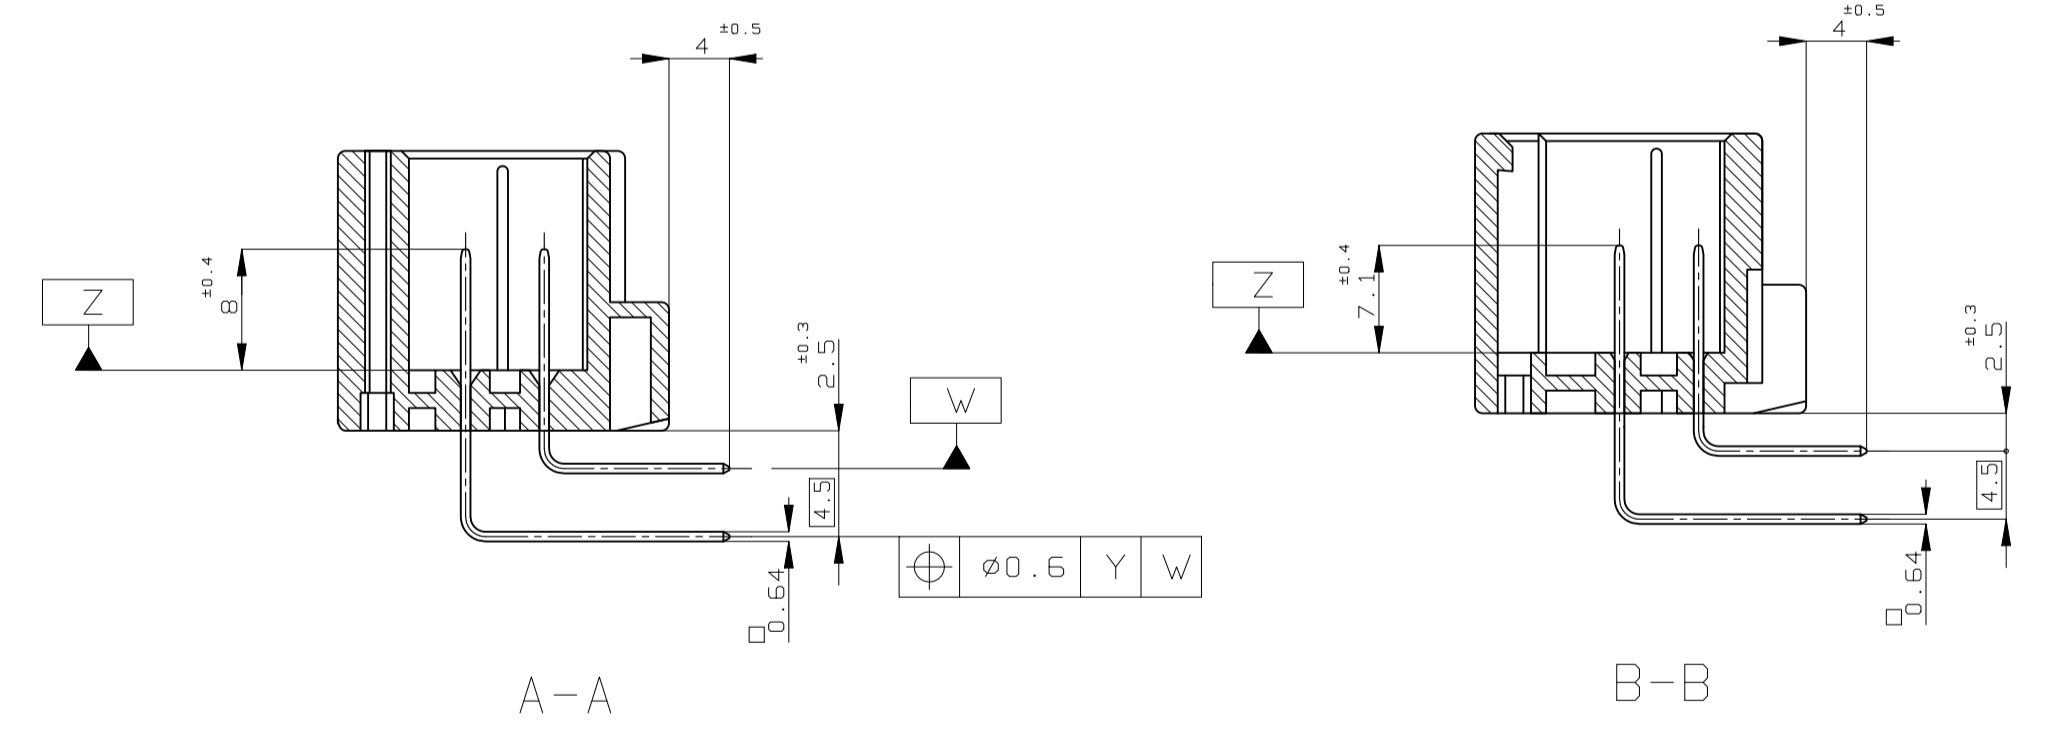

REV	DATE	DESCRIPTION	BY	CHK	APPV
54		SELECTIVE-TIN (MATTE) PRE-TINNED × 31			
59		SELECTIVE-TIN (MATTE) PRE-TINNED × 40			
58		SELECTIVE-TIN (MATTE) PRE-TINNED × 26			
56		SELECTIVE-TIN (MATTE) PRE-TINNED × 25			
53		SELECTIVE-TIN (MATTE) PRE-TINNED × 34			
53		SELECTIVE-TIN (MATTE) PRE-TINNED × 34			
52		SELECTIVE-TIN (MATTE) PRE-TINNED × 10			
52		SELECTIVE-TIN (MATTE) PRE-TINNED × 10			
55		SELECTIVE-TIN (MATTE) PRE-TINNED × 10			
9		TIN-LEAD PRE-TINNED × 40			
8		TIN-LEAD PRE-TINNED × 26			
8		TIN-LEAD PRE-TINNED × 26			
8		TIN-LEAD PRE-TINNED × 26			
7		TIN-LEAD PRE-TINNED × 39			
6		TIN-LEAD PRE-TINNED × 25			
5		TIN-LEAD PRE-TINNED × 30			
4		TIN-LEAD PRE-TINNED × 31			
4		TIN-LEAD PRE-TINNED × 34			
3		TIN-LEAD PRE-TINNED × 36			
3		TIN-LEAD PRE-TINNED × 34			
2		TIN-LEAD PRE-TINNED × 10			
0		PRE-TINNED 鍍めつき × 42			
1		SELECTIVE-TIN (MATTE) PRE-TINNED 鍍めつき × 42			
0		PRE-TINNED 鍍めつき × 42			
△ MARKING		FINISH OF CONTACT 半田付状態	CONTACT SIDE 接触経路	POWER CIRCUIT NO. 17-回路	SIGNAL CIRCUIT NO. シグナル回路
△ MARKING		FINISH OF CONTACT 半田付状態	CONTACT SIDE 接触経路	CIRCUIT NO. 回路番号	HOUSING COLOR ハブジャック色

GENERAL TOLERANCE	SIZE	ANGLE
0 < 10	±0.2	
10 < 30	±0.25	
30 < 100	±0.3	
ANGLES	±3°	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIN M. KADOSAKI 17MAY05
CHK T. SHINOHARA 17MAY05
APVD K. BETSUJI 17MAY05

TE Connectivity

42POSITION CAP HOUSING ASSY
040/070 SERIES HYBRID I/O CONNECTOR

WEIGHT 21.3 g
SIZE A1
CAGE CODE 00779
DRAWING NO. 175446

CUSTOMER DRAWING

SCALE 2:1 SHEET 1 of 1 REV. N11