



May.1.2023 Copyright 2023 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
3	RE-F-06374	J.M	M	19905.15					
3	RE-F-06522	J.M	M	99.9.7					

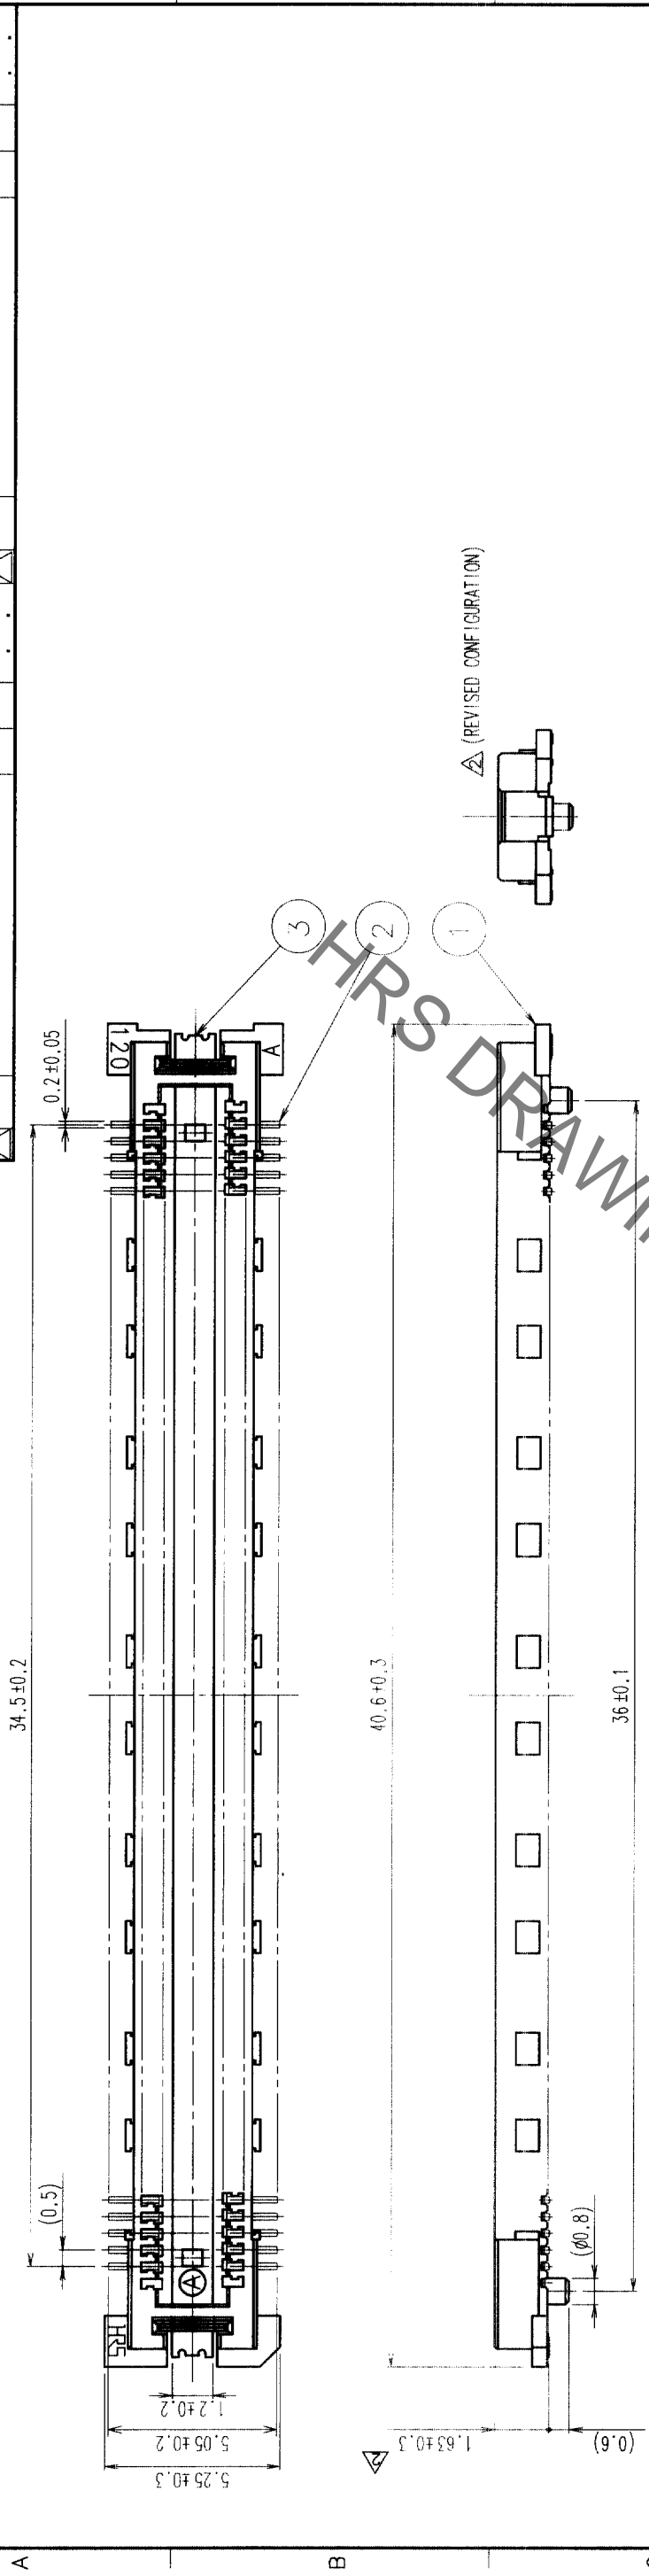

RECOMMENDED LAND PATTERN DIMENSION OF PCB

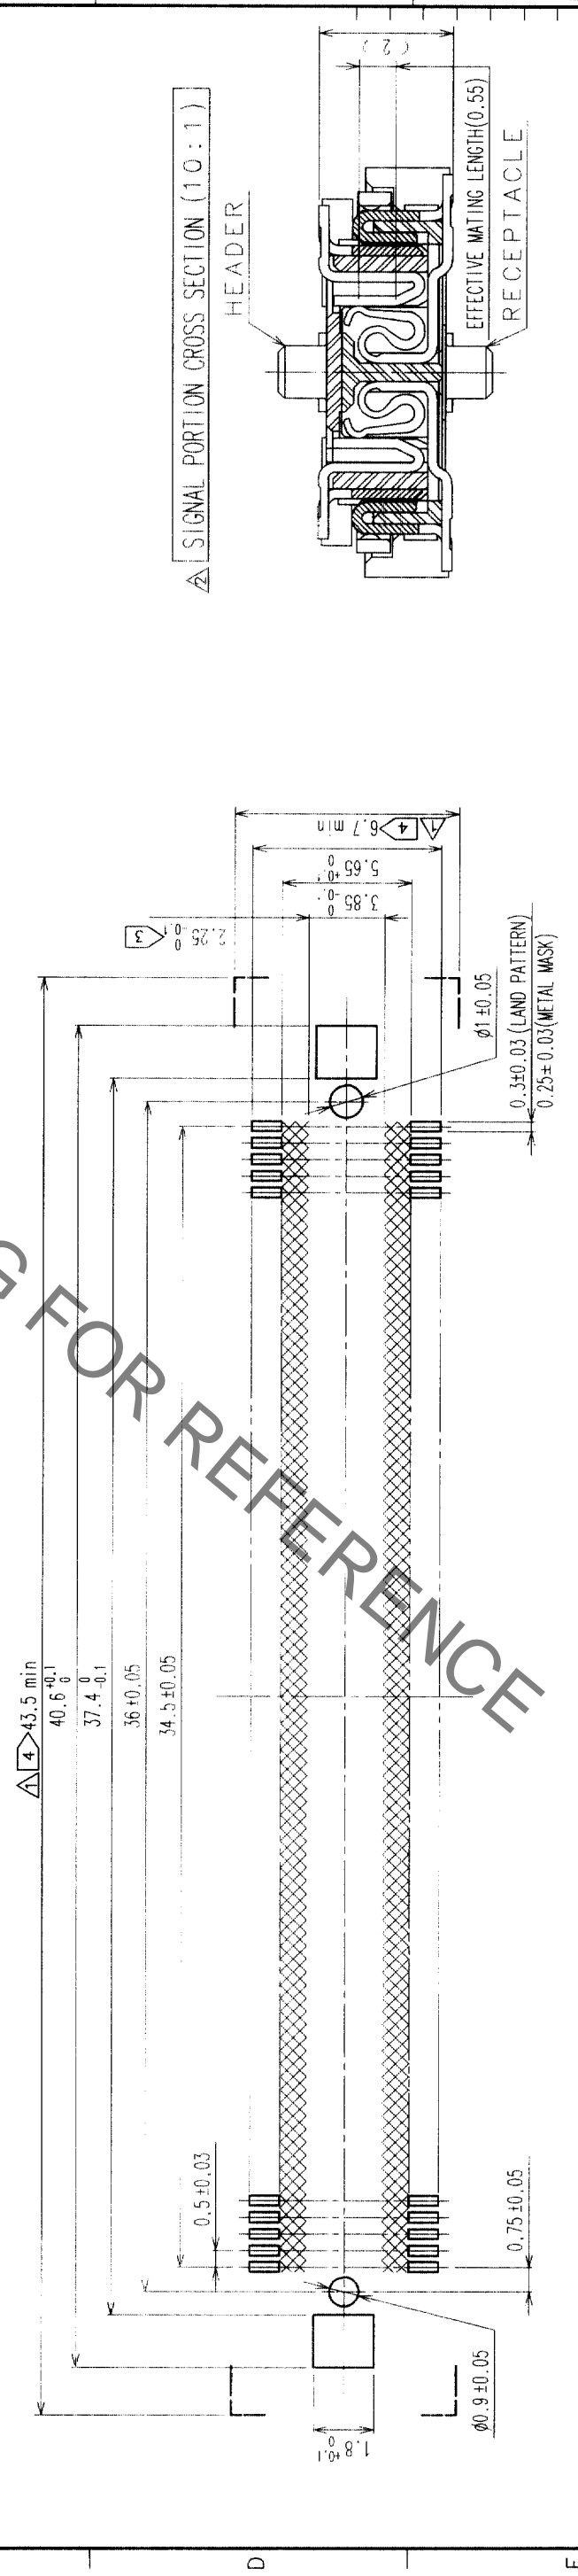

2	COPPER ALLOY	CONTACT AREA: GOLD (0.1mm) OVER NICKEL LEAD: GOLD FLASH OVER NICKEL						
1	LCP	BEIGE UL94V-0						
NO.	MATERIAL	FINISH, REMARKS						
CODE NO. (OLD)	CL							
DRAWN	J. Matsukawa	DESIGNED	J. Matsukawa	CHECKED	Y. Yoshimura	APPROVED	Y. Yoshimura	RELEASED
990212	990212	990212	990212	990212	990212	990212	990212	990212

- NOTES
- SMT LEAD-COPLANARITY: 0.1 MAX.
 - THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
 - DO NOT MOUNT OTHER DEVICES ONTO [] AREA, OR MATING PAIR CANNOT BE MATED.

DRAWING NO.	EDC3-152103	PART NO.	FX11LA-140P-SV
SCALE	5:1	CODE NO.	CL573-0045-0
UNITS	mm		