


1                      2                      3                      4                      5                      6                      7

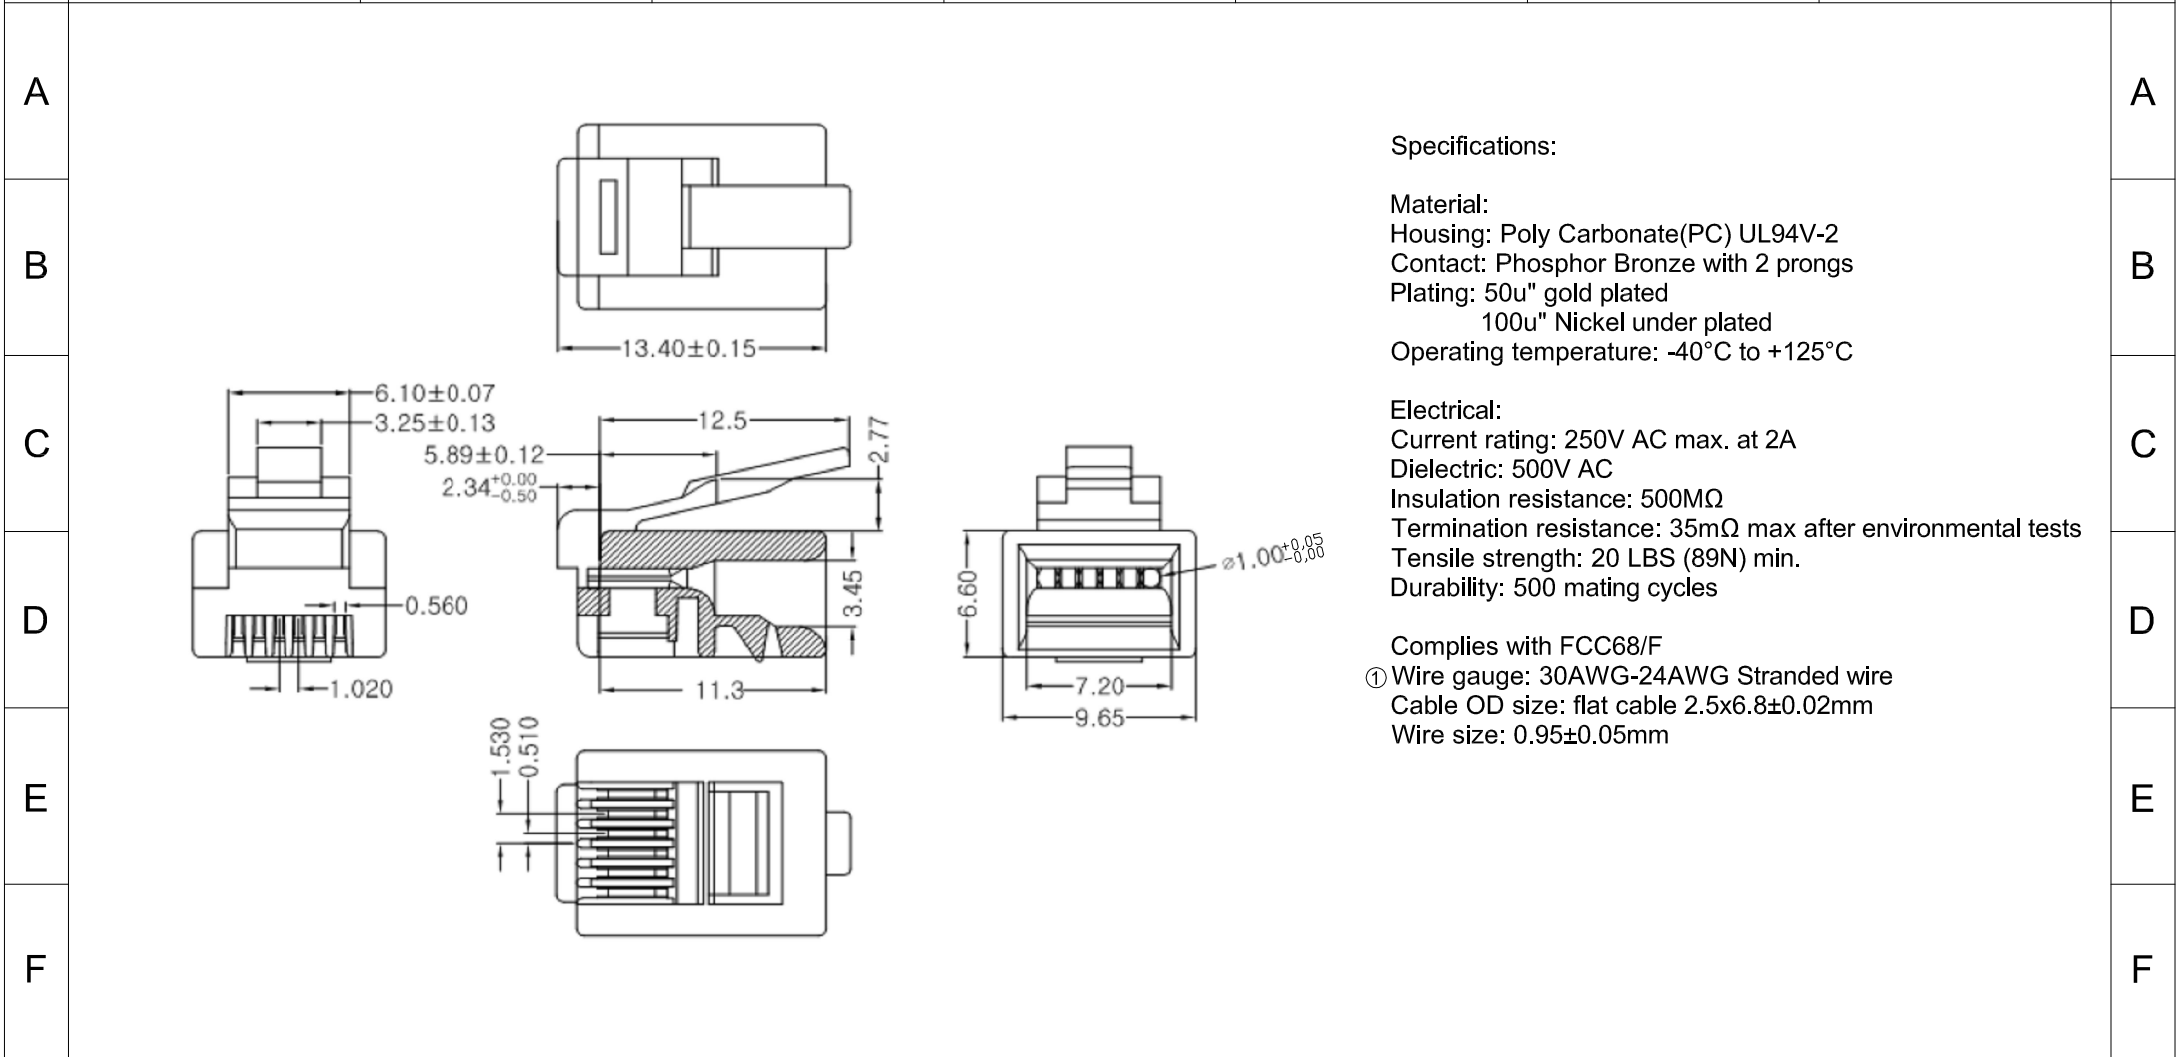

**Specifications:**

**Material:**

Housing: Poly Carbonate(PC) UL94V-2  
 Contact: Phosphor Bronze with 2 prongs  
 Plating: 50u" gold plated  
           100u" Nickel under plated  
 Operating temperature: -40°C to +125°C


**Electrical:**

Current rating: 250V AC max. at 2A  
 Dielectric: 500V AC  
 Insulation resistance: 500MΩ  
 Termination resistance: 35mΩ max after environmental tests  
 Tensile strength: 20 LBS (89N) min.  
 Durability: 500 mating cycles

**Complies with FCC68/F**

- ① Wire gauge: 30AWG-24AWG Stranded wire
- Cable OD size: flat cable 2.5x6.8±0.02mm
- Wire size: 0.95±0.05mm

**RoHS compliant**  
 Unit: mm

| Scale     | Free  |     |                                 |            |        |   | Date       | Name   | Customer-No.    |             |
|-----------|-------|-----|---------------------------------|------------|--------|---|------------|--------|-----------------|-------------|
| TOLERANCE |       |     |                                 |            |        | Drawn   | 13.06.2016 | Winnie |                 |             |
| X.X       | ±0.20 |     |                                 |            |        | Approved  | 03.04.2019 | Amy    | ASSMANN WSW-No. |             |
| X.XX      | ±0.10 |     |                                 |            |        |   |            |        | A-MO 6/6-F50    |             |
| X.XXX     | ±0.05 |     |                                 |            |        |   |            |        |                 |             |
| DIM       | TOL   |     |                                 |            |        |   |            |        |                 | Drawing-No. |
|           |       | ①   | Add cable wire size information | 03.04.2019 | Amy    |  |            |        | ASS 7274 CO     | rev01       |
| Angle     | ±2°   | ②   | Drawn                           | 13.06.2016 | Winnie |   |            |        | Replace         | Sheet       |
| Angle     | TOL   | Id. | Modification                    | Date       | Name   |   |            |        |                 |             |

1                      2                      3                      4                      5                      6                      7