

Automatic Stripping Pliers

For multicore cable \varnothing 4.4 to \varnothing 7.5 mm
with irregular sheathing cross-section


12
74

For control and sensor cables / actuator cables, also for stripping flexible 3-core feed cables and extension cable

Automatic adjustment to cable diameters between 4.4 and 7.5 mm

No damage to the inner conductor or shield braid

- > allows cable to pass through center of pliers for mid-line strip or stripping longer lengths
- > suitable for highly flexible PUR and PVC cable sheathing and rubber leads such as H05, etc.
- > long stripping lengths possible
- > body: plastic, fiberglass-reinforced
- > exchangeable blades: special tool steel, oil-hardened



Sectional view of an extension lead



12 74 180 SB



Required stripping length easy to read




Complex cutter design for precise and damage-free stripping of round cables

Product Number	Packaging	↔ mm	Stripping capacities \varnothing mm	⚖ lbs
12 74 180 SB	X	175	4.4 - 7.5	0.26
12 79 31		1 pair of spare blades for 12 74 180 SB		

Mini Wire Stripper

12
80

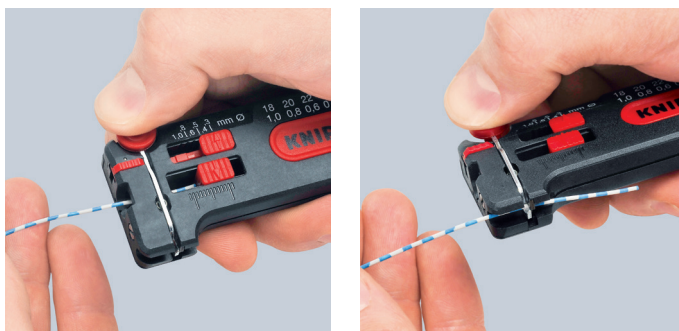

12 80 040 SB

For thin copper conductors dia. 36 – 26 AWG (0.12 to 0.4 mm)

12 80 100 SB

For thin copper conductors dia. 28 – 18 AWG (0.3 – 1.0 mm)

- > precise stripping due to the tool's gradual adjustment to the conductor's diameter
- > includes wire cutter
- > adjustable length stop from 5/32" – 19/32" (4.0 – 15.0 mm)
- > includes locking device
- > housing: plastic, impact-resistant



12 80 100 SB



Product Number	Packaging	↔ Inch mm	⚖	Stripping capacities \varnothing mm	AWG	lbs
12 80 040 SB	X	4 100	⚖	0.12 - 0.4	36 - 26	0.08
12 80 100 SB	X	4 100		0.30 - 1.0	28 - 18	0.08