

MK SERIES

Electromechanical Totalizers 4 and 6 Digit

Features

- CE Certified
- Rugged Case
- Varied Mounting Styles
- 4 and 6 Digits with Manual & Electric Reset
- Many Standard Voltages
- 250 Million Count Life, Minimum
- Many Options Available



Application:

Production counting, line counting (printers), events, fees, where count must be retained even if power is lost.

Description:

MK counters combine extra long count life, 250 million minimum, and absolute accuracy even with 10% voltage variation. Varied mounting styles. The spring clip mount gives the user a clean uncluttered panel. Installation is expedited by 0.020" x 0.11" quick push on connectors.

Specifications:

Display: 4, 6 digit with manual or electric reset

Digits: .160" white on black wheels.

Operating Voltages:

5, 6, 12, 24, 48, 110, 220 VDC;

12, 24, 48, 110, 220 VAC

Count Speed: 10, 25, 35 CPS VDC; 18 CPS VAC only.

Temperature: +14°F to +114°F (-10°C to +45°C)

Housing: Rugged, black, polycarbonate

Termination: Terminal pins 0.110" x 0.032 connectors supplied


Weight: 3 ounces

Max. Count Time: Continuous, 50/50 or 60/40 on/off pulse ratio.

Approvals: CE Approved

Count Input:

Voltage	Count Per Sec.	Time In Millisec On	Time In Millisec Off	Pulse Ratio	Power Consumption	
					Count	Reset
DC	10	50	50	1:1	1.2 W	9 W
	25	24	16	3:2	2 W	
	35	17	11	3:2	5.5 W	
AC	18	27	27	1:1	3 VA	14 VA

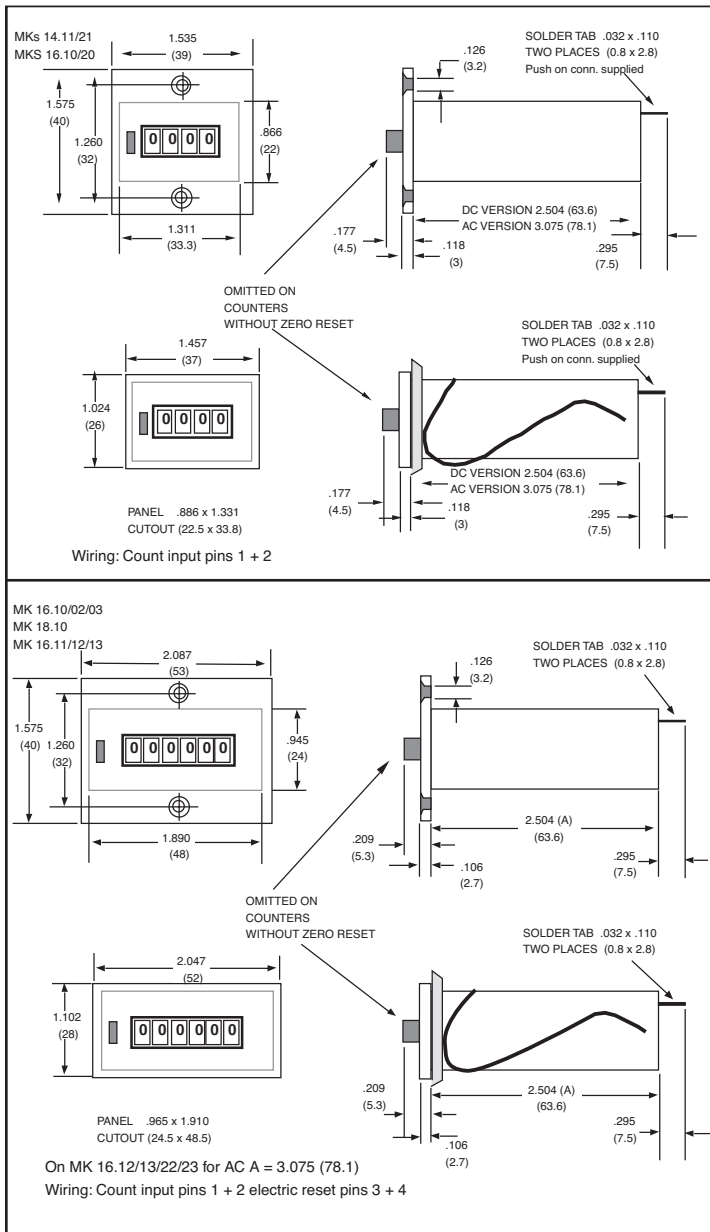

How To Order

EXAMPLE: MK16 1 2 24 VDC 25 CPS

Series _____

MK14 = 4 digits with reset (1.32" wide cut out)
 MK16 = 6 digits with/without reset (1.89" wide cut out)
 MK18 = Discontinued; See B18 for replacement

Mounting

- 0 = Rear mount
- 1 = Screw panel
- 2 = Spring clip

Reset

- 0 = Non-reset
- 1 = Manual push button
- 2 = Electric (6 digit only)
- 3 = Both (6 digit only)

Voltages (specify)

- 5, 6, 12, 24, 48, 110 and 220 VDC
- 12, 24, 48, 110 and 220 VAC

Count Speeds

- (specify)
- 10, 25, 35 CPS DC
 - 18 CPS AC

Available Options (add to end of part number)

- FL - 6" wire leads
- LT - Low temperature (-22°F to +115°F)
- HT - High temperature (+14°F to +140°F)
- TB - Terminal block