



power contactor, AC-3 12 A, 5.5 kW / 400 V 2 NO + 2 NC, 24 V DC 3-pole,  
Size S0 screw terminal Removable auxiliary switch

|   |                                       |
|---|---------------------------------------|
| <b>product brand name</b>   | SIRIUS                                |
| <b>product designation</b>  | Power contactor                       |
| <b>product type designation</b>   | 3RT2                                  |
| <b>General technical data</b>   |                                       |
| <b>size of contactor</b>  | S0                                    |
| <b>product extension</b>  |                                       |
| <ul style="list-style-type: none"> <li>function module for communication</li> <li>auxiliary switch</li> </ul>   | No<br>No                              |
| <b>power loss [W] for rated value of the current</b>  |                                       |
| <ul style="list-style-type: none"> <li>at AC in hot operating state</li> <li>at AC in hot operating state per pole</li> <li>without load current share typical</li> </ul>   | 0.9 W<br>0.3 W<br>5.9 W               |
| <b>insulation voltage</b>   |                                       |
| <ul style="list-style-type: none"> <li>of main circuit with degree of pollution 3 rated value</li> <li>of auxiliary circuit with degree of pollution 3 rated value</li> </ul>   | 690 V<br>690 V                        |
| <b>surge voltage resistance</b>   |                                       |
| <ul style="list-style-type: none"> <li>of main circuit rated value</li> <li>of auxiliary circuit rated value</li> </ul>   | 6 kV<br>6 kV                          |
| maximum permissible voltage for safe isolation between coil and main contacts according to EN 60947-1   | 400 V                                 |
| <b>shock resistance at rectangular impulse</b>  |                                       |
| <ul style="list-style-type: none"> <li>at DC</li> </ul>   | 10g / 5 ms, 7,5g / 10 ms              |
| <b>shock resistance with sine pulse</b>   |                                       |
| <ul style="list-style-type: none"> <li>at DC</li> </ul>   | 15g / 5 ms, 10g / 10 ms               |
| <b>mechanical service life (switching cycles)</b>   |                                       |
| <ul style="list-style-type: none"> <li>of contactor typical</li> <li>of the contactor with added electronically optimized auxiliary switch block typical</li> <li>of the contactor with added auxiliary switch block typical</li> </ul> | 10 000 000<br>5 000 000<br>10 000 000 |
| <b>reference code according to IEC 81346-2</b>  | Q                                     |
| <b>Substance Prohibitance (Date)</b>  | 10/01/2009                            |
| <b>Ambient conditions</b>   |                                       |
| installation altitude at height above sea level maximum   | 2 000 m                               |
| <b>ambient temperature</b>  |                                       |
| <ul style="list-style-type: none"> <li>during operation</li> <li>during storage</li> </ul>  | -25 ... +60 °C<br>-55 ... +80 °C      |
| <b>relative humidity minimum</b>  | 10 %                                  |
| <b>relative humidity at 55 °C according to IEC 60068-2-30 maximum</b>   | 95 %                                  |

## Main circuit

|  |                    |
|--|--------------------|
| <b>number of poles for main current circuit</b>                        | 3                  |
| <b>number of NO contacts for main contacts</b>                         | 3                  |
| <b>operating voltage</b>   |                    |
| • at AC-3 rated value maximum  | 690 V              |
| • at AC-3e rated value maximum   | 690 V              |
| <b>operational current</b>   |                    |
| • at AC-1 at 400 V at ambient temperature 40 °C rated value            | 40 A               |
| • at AC-1  |                    |
| — up to 690 V at ambient temperature 40 °C rated value                 | 40 A               |
| — up to 690 V at ambient temperature 60 °C rated value                 | 35 A               |
| • at AC-3  |                    |
| — at 400 V rated value   | 12 A               |
| — at 500 V rated value   | 12 A               |
| — at 690 V rated value   | 9 A                |
| • at AC-3e   |                    |
| — at 400 V rated value   | 12 A               |
| — at 500 V rated value   | 12 A               |
| — at 690 V rated value   | 9 A                |
| • at AC-4 at 400 V rated value   | 12.5 A             |
| • at AC-5a up to 690 V rated value                                     | 35.2 A             |
| • at AC-5b up to 400 V rated value                                     | 9.9 A              |
| • at AC-6a   |                    |
| — up to 230 V for current peak value n=20 rated value                  | 11.4 A             |
| — up to 400 V for current peak value n=20 rated value                  | 11.4 A             |
| — up to 500 V for current peak value n=20 rated value                  | 11.3 A             |
| — up to 690 V for current peak value n=20 rated value                  | 9 A                |
| • at AC-6a   |                    |
| — up to 230 V for current peak value n=30 rated value                  | 7.6 A              |
| — up to 400 V for current peak value n=30 rated value                  | 7.6 A              |
| — up to 500 V for current peak value n=30 rated value                  | 7.6 A              |
| — up to 690 V for current peak value n=30 rated value                  | 7.6 A              |
| minimum cross-section in main circuit at maximum AC-1 rated value      | 10 mm <sup>2</sup> |
| <b>operational current for approx. 200000 operating cycles at AC-4</b> |                    |
| • at 400 V rated value   | 5.5 A              |
| • at 690 V rated value   | 5.5 A              |
| <b>operational current</b>   |                    |
| • <b>at 1 current path at DC-1</b>                                     |                    |
| — at 24 V rated value  | 35 A               |
| — at 110 V rated value   | 4.5 A              |
| — at 220 V rated value   | 1 A                |
| — at 440 V rated value   | 0.4 A              |
| — at 600 V rated value   | 0.25 A             |
| • <b>with 2 current paths in series at DC-1</b>                        |                    |
| — at 24 V rated value  | 35 A               |
| — at 110 V rated value   | 35 A               |
| — at 220 V rated value   | 5 A                |
| — at 440 V rated value   | 1 A                |
| — at 600 V rated value   | 0.8 A              |
| • <b>with 3 current paths in series at DC-1</b>                        |                    |

|  |  |
|--|--|
| <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 110 V rated value</li> <li>— at 220 V rated value</li> <li>— at 440 V rated value</li> <li>— at 600 V rated value</li> </ul>  | 35 A<br>35 A<br>35 A<br>2.9 A<br>1.4 A   |
| <ul style="list-style-type: none"> <li>● <b>at 1 current path at DC-3 at DC-5</b> <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 110 V rated value</li> <li>— at 220 V rated value</li> <li>— at 440 V rated value</li> <li>— at 600 V rated value</li> </ul> </li> </ul>  | 20 A<br>2.5 A<br>1 A<br>0.09 A<br>0.06 A   |
| <ul style="list-style-type: none"> <li>● <b>with 2 current paths in series at DC-3 at DC-5</b> <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 110 V rated value</li> <li>— at 220 V rated value</li> <li>— at 440 V rated value</li> <li>— at 600 V rated value</li> </ul> </li> </ul>   | 35 A<br>15 A<br>3 A<br>0.27 A<br>0.16 A  |
| <ul style="list-style-type: none"> <li>● <b>with 3 current paths in series at DC-3 at DC-5</b> <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 110 V rated value</li> <li>— at 220 V rated value</li> <li>— at 440 V rated value</li> <li>— at 600 V rated value</li> </ul> </li> </ul>   | 35 A<br>35 A<br>10 A<br>0.6 A<br>0.6 A   |
| <b>operating power</b> <ul style="list-style-type: none"> <li>● at AC-3           <ul style="list-style-type: none"> <li>— at 230 V rated value</li> <li>— at 400 V rated value</li> <li>— at 500 V rated value</li> <li>— at 690 V rated value</li> </ul> </li> <li>● at AC-3e           <ul style="list-style-type: none"> <li>— at 230 V rated value</li> <li>— at 400 V rated value</li> <li>— at 500 V rated value</li> <li>— at 690 V rated value</li> </ul> </li> </ul> | 3 kW<br>5.5 kW<br>5.5 kW<br>7.5 kW<br><br>3 kW<br>5.5 kW<br>5.5 kW<br>7.5 kW   |
| <b>operating power for approx. 200000 operating cycles at AC-4</b> <ul style="list-style-type: none"> <li>● at 400 V rated value</li> <li>● at 690 V rated value</li> </ul>  | 2.6 kW<br>4.6 kW   |
| <b>operating apparent power at AC-6a</b> <ul style="list-style-type: none"> <li>● up to 230 V for current peak value n=20 rated value</li> <li>● up to 400 V for current peak value n=20 rated value</li> <li>● up to 500 V for current peak value n=20 rated value</li> <li>● up to 690 V for current peak value n=20 rated value</li> </ul>  | 4.5 kVA<br>7.8 kVA<br>9.8 kVA<br>10.7 kVA  |
| <b>operating apparent power at AC-6a</b> <ul style="list-style-type: none"> <li>● up to 230 V for current peak value n=30 rated value</li> <li>● up to 400 V for current peak value n=30 rated value</li> <li>● up to 500 V for current peak value n=30 rated value</li> <li>● up to 690 V for current peak value n=30 rated value</li> </ul>  | 3 kVA<br>5.2 kVA<br>6.5 kVA<br>9 kVA   |
| <b>short-time withstand current in cold operating state up to 40 °C</b> <ul style="list-style-type: none"> <li>● limited to 1 s switching at zero current maximum</li> <li>● limited to 5 s switching at zero current maximum</li> <li>● limited to 10 s switching at zero current maximum</li> <li>● limited to 30 s switching at zero current maximum</li> <li>● limited to 60 s switching at zero current maximum</li> </ul>  | 210 A; Use minimum cross-section acc. to AC-1 rated value<br>210 A; Use minimum cross-section acc. to AC-1 rated value<br>162 A; Use minimum cross-section acc. to AC-1 rated value<br>103 A; Use minimum cross-section acc. to AC-1 rated value<br>88 A; Use minimum cross-section acc. to AC-1 rated value |
| <b>no-load switching frequency</b> <ul style="list-style-type: none"> <li>● at DC</li> </ul>   | 1 500 1/h  |
| <b>operating frequency</b> <ul style="list-style-type: none"> <li>● at AC-1 maximum</li> <li>● at AC-2 maximum</li> <li>● at AC-3 maximum</li> </ul>   | 1 000 1/h<br>1 000 1/h<br>1 000 1/h  |

|  |   |
|--|---|
| <ul style="list-style-type: none"> <li>• at AC-3e maximum</li> </ul>   | 1 000 1/h                                       |
| <ul style="list-style-type: none"> <li>• at AC-4 maximum</li> </ul>  | 300 1/h   |
| <b>Control circuit/ Control</b>  |   |
| <b>type of voltage of the control supply voltage</b>   | DC  |
| <b>control supply voltage at DC</b>  |   |
| <ul style="list-style-type: none"> <li>• rated value</li> </ul>  | 24 V  |
| <b>operating range factor control supply voltage rated value of magnet coil at DC</b>  |   |
| <ul style="list-style-type: none"> <li>• initial value</li> </ul>  | 0.8   |
| <ul style="list-style-type: none"> <li>• full-scale value</li> </ul>   | 1.1   |
| <b>closing power of magnet coil at DC</b>  | 5.9 W   |
| <b>holding power of magnet coil at DC</b>  | 5.9 W   |
| <b>closing delay</b>   |   |
| <ul style="list-style-type: none"> <li>• at DC</li> </ul>  | 50 ... 170 ms                                   |
| <b>opening delay</b>   |   |
| <ul style="list-style-type: none"> <li>• at DC</li> </ul>  | 15 ... 17.5 ms                                  |
| <b>arcing time</b>   | 10 ... 10 ms                                    |
| <b>control version of the switch operating mechanism</b>   | Standard A1 - A2                                |
| <b>Auxiliary circuit</b>   |   |
| number of NC contacts for auxiliary contacts instantaneous contact   | 2   |
| number of NO contacts for auxiliary contacts instantaneous contact   | 2   |
| operational current at AC-12 maximum   | 10 A  |
| <b>operational current at AC-15</b>  |   |
| <ul style="list-style-type: none"> <li>• at 230 V rated value</li> </ul>   | 6 A   |
| <ul style="list-style-type: none"> <li>• at 400 V rated value</li> </ul>   | 3 A   |
| <ul style="list-style-type: none"> <li>• at 500 V rated value</li> </ul>   | 2 A   |
| <ul style="list-style-type: none"> <li>• at 690 V rated value</li> </ul>   | 1 A   |
| <b>operational current at DC-12</b>  |   |
| <ul style="list-style-type: none"> <li>• at 24 V rated value</li> </ul>  | 10 A  |
| <ul style="list-style-type: none"> <li>• at 48 V rated value</li> </ul>  | 6 A   |
| <ul style="list-style-type: none"> <li>• at 60 V rated value</li> </ul>  | 6 A   |
| <ul style="list-style-type: none"> <li>• at 110 V rated value</li> </ul>   | 3 A   |
| <ul style="list-style-type: none"> <li>• at 125 V rated value</li> </ul>   | 2 A   |
| <ul style="list-style-type: none"> <li>• at 220 V rated value</li> </ul>   | 1 A   |
| <ul style="list-style-type: none"> <li>• at 600 V rated value</li> </ul>   | 0.15 A  |
| <b>operational current at DC-13</b>  |   |
| <ul style="list-style-type: none"> <li>• at 24 V rated value</li> </ul>  | 6 A   |
| <ul style="list-style-type: none"> <li>• at 48 V rated value</li> </ul>  | 2 A   |
| <ul style="list-style-type: none"> <li>• at 60 V rated value</li> </ul>  | 2 A   |
| <ul style="list-style-type: none"> <li>• at 110 V rated value</li> </ul>   | 1 A   |
| <ul style="list-style-type: none"> <li>• at 125 V rated value</li> </ul>   | 0.9 A   |
| <ul style="list-style-type: none"> <li>• at 220 V rated value</li> </ul>   | 0.3 A   |
| <ul style="list-style-type: none"> <li>• at 600 V rated value</li> </ul>   | 0.1 A   |
| <b>contact reliability of auxiliary contacts</b>   | 1 faulty switching per 100 million (17 V, 1 mA) |
| <b>UL/CSA ratings</b>  |   |
| <b>full-load current (FLA) for 3-phase AC motor</b>  |   |
| <ul style="list-style-type: none"> <li>• at 480 V rated value</li> </ul>   | 11 A  |
| <ul style="list-style-type: none"> <li>• at 600 V rated value</li> </ul>   | 11 A  |
| <b>yielded mechanical performance [hp]</b>   |   |
| <ul style="list-style-type: none"> <li>• for single-phase AC motor <ul style="list-style-type: none"> <li>— at 110/120 V rated value</li> <li>— at 230 V rated value</li> </ul> </li> </ul>  | 1 hp<br>2 hp                                    |
| <ul style="list-style-type: none"> <li>• for 3-phase AC motor <ul style="list-style-type: none"> <li>— at 200/208 V rated value</li> <li>— at 220/230 V rated value</li> <li>— at 460/480 V rated value</li> <li>— at 575/600 V rated value</li> </ul> </li> </ul> | 3 hp<br>3 hp<br>7.5 hp<br>10 hp                 |
| <b>contact rating of auxiliary contacts according to UL</b>  | A600 / Q600                                     |

| Short-circuit protection  |  |
|---|--|
| <b>design of the fuse link</b> <ul style="list-style-type: none"> <li>for short-circuit protection of the main circuit <ul style="list-style-type: none"> <li>with type of coordination 1 required</li> <li>with type of assignment 2 required</li> </ul> </li> <li>for short-circuit protection of the auxiliary switch required</li> </ul>  | gG: 63A (690V,100kA), aM: 32A (690V,100kA), BS88: 63A (415V,80kA)<br>gG: 25A (690V,100kA), aM: 20A (690V,100kA), BS88: 25A (415V,80kA)<br>gG: 10 A (500 V, 1 kA)   |
| Installation/ mounting/ dimensions  |  |
| <b>mounting position</b>  | +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface   |
| <b>fastening method</b> <ul style="list-style-type: none"> <li>side-by-side mounting</li> </ul>   | screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715<br>Yes  |
| <b>height</b>   | 85 mm  |
| <b>width</b>  | 45 mm  |
| <b>depth</b>  | 151 mm   |
| <b>required spacing</b> <ul style="list-style-type: none"> <li>with side-by-side mounting <ul style="list-style-type: none"> <li>forwards</li> <li>upwards</li> <li>downwards</li> <li>at the side</li> </ul> </li> <li>for grounded parts <ul style="list-style-type: none"> <li>forwards</li> <li>upwards</li> <li>at the side</li> <li>downwards</li> </ul> </li> <li>for live parts <ul style="list-style-type: none"> <li>forwards</li> <li>upwards</li> <li>downwards</li> <li>at the side</li> </ul> </li> </ul> | 10 mm<br>10 mm<br>10 mm<br>0 mm<br>10 mm<br>10 mm<br>6 mm<br>10 mm<br>10 mm<br>10 mm<br>6 mm   |
| Connections/ Terminals  |  |
| <b>type of electrical connection</b> <ul style="list-style-type: none"> <li>for main current circuit</li> <li>for auxiliary and control circuit</li> <li>at contactor for auxiliary contacts</li> <li>of magnet coil</li> </ul>   | screw-type terminals<br>screw-type terminals<br>Screw-type terminals<br>Screw-type terminals   |
| <b>type of connectable conductor cross-sections</b> <ul style="list-style-type: none"> <li>for main contacts <ul style="list-style-type: none"> <li>solid</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> </ul> </li> <li>at AWG cables for main contacts</li> </ul>  | 2x (1 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 10 mm <sup>2</sup> )<br>2x (1 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 10 mm <sup>2</sup> )<br>2x (1 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup><br>2x (16 ... 12), 2x (14 ... 8) |
| <b>connectable conductor cross-section for main contacts</b> <ul style="list-style-type: none"> <li>solid</li> <li>stranded</li> <li>finely stranded with core end processing</li> </ul>  | 1 ... 10 mm <sup>2</sup><br>1 ... 10 mm <sup>2</sup><br>1 ... 10 mm <sup>2</sup>   |
| <b>connectable conductor cross-section for auxiliary contacts</b> <ul style="list-style-type: none"> <li>solid or stranded</li> <li>finely stranded with core end processing</li> </ul>   | 0.5 ... 2.5 mm <sup>2</sup><br>0.5 ... 2.5 mm <sup>2</sup>   |
| <b>type of connectable conductor cross-sections</b> <ul style="list-style-type: none"> <li>for auxiliary contacts <ul style="list-style-type: none"> <li>solid or stranded</li> <li>finely stranded with core end processing</li> </ul> </li> <li>at AWG cables for auxiliary contacts</li> </ul>   | 2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )<br>2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )<br>2x (20 ... 16), 2x (18 ... 14)   |
| <b>AWG number as coded connectable conductor cross section</b> <ul style="list-style-type: none"> <li>for main contacts</li> </ul>  | 16 ... 8   |

- for auxiliary contacts

20 ... 14

### Safety related data

|   |  |
|---|--|
| <b>product function</b>   |  |
| <ul style="list-style-type: none"> <li>• mirror contact according to IEC 60947-4-1</li> <li>• positively driven operation according to IEC 60947-5-1</li> </ul> | <p>Yes</p> <p>No</p>                             |
| B10 value with high demand rate according to SN 31920   | 450 000  |
| <b>proportion of dangerous failures</b>   |  |
| <ul style="list-style-type: none"> <li>• with low demand rate according to SN 31920</li> <li>• with high demand rate according to SN 31920</li> </ul>           | <p>40 %</p> <p>73 %</p>                          |
| failure rate [FIT] with low demand rate according to SN 31920   | 100 FIT  |
| T1 value for proof test interval or service life according to IEC 61508   | 20 y   |
| <b>protection class IP on the front according to IEC 60529</b>  | IP20   |
| <b>touch protection on the front according to IEC 60529</b>   | finger-safe, for vertical contact from the front |
| <b>suitability for use</b>  |  |
| <ul style="list-style-type: none"> <li>• safety-related switching OFF</li> </ul>  | Yes  |

### Certificates/ approvals

#### General Product Approval



[Confirmation](#)



[KC](#)



|     |                                       |                           |                   |
|-----|---------------------------------------|---------------------------|-------------------|
| EMC | Functional Safety/Safety of Machinery | Declaration of Conformity | Test Certificates |
|-----|---------------------------------------|---------------------------|-------------------|



[Type Examination Certificate](#)



EG-Konf.

[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)

### Marine / Shipping



|       |                |
|-------|----------------|
| other | Dangerous Good |
|-------|----------------|

[Confirmation](#)

[Environmental Confirmations](#)



[Transport Information](#)

### Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2024-1BB44>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2024-1BB44>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2024-1BB44>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RT2024-1BB44&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2024-1BB44&lang=en)


Characteristic: Tripping characteristics,  $I^2t$ , Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2024-1BB44/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2024-1BB44&objecttype=14&gridview=view1>

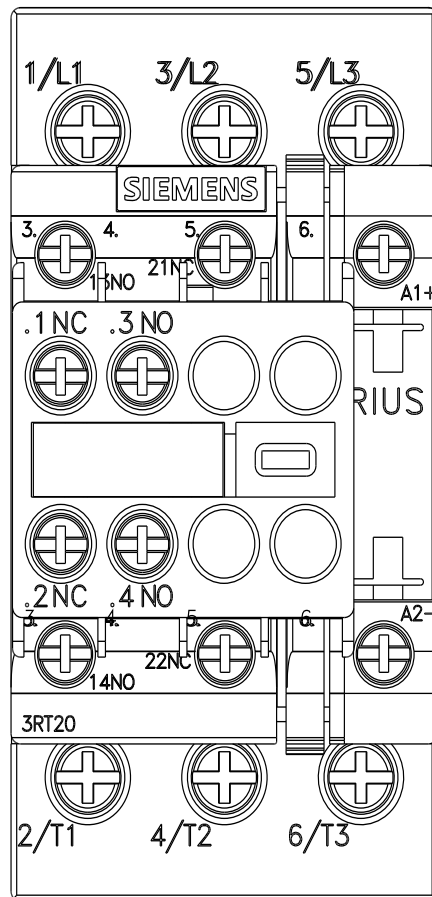

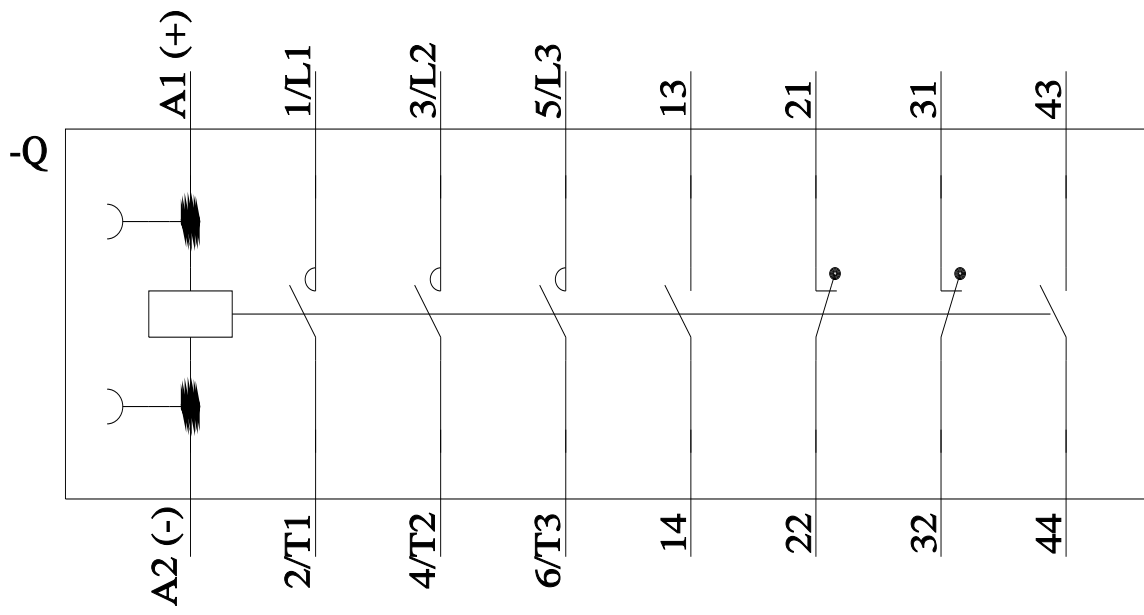

last modified:

6/2/2022 