


In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales wigdow correspondents.

NO.	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
1					1				
2					1				
3					1				

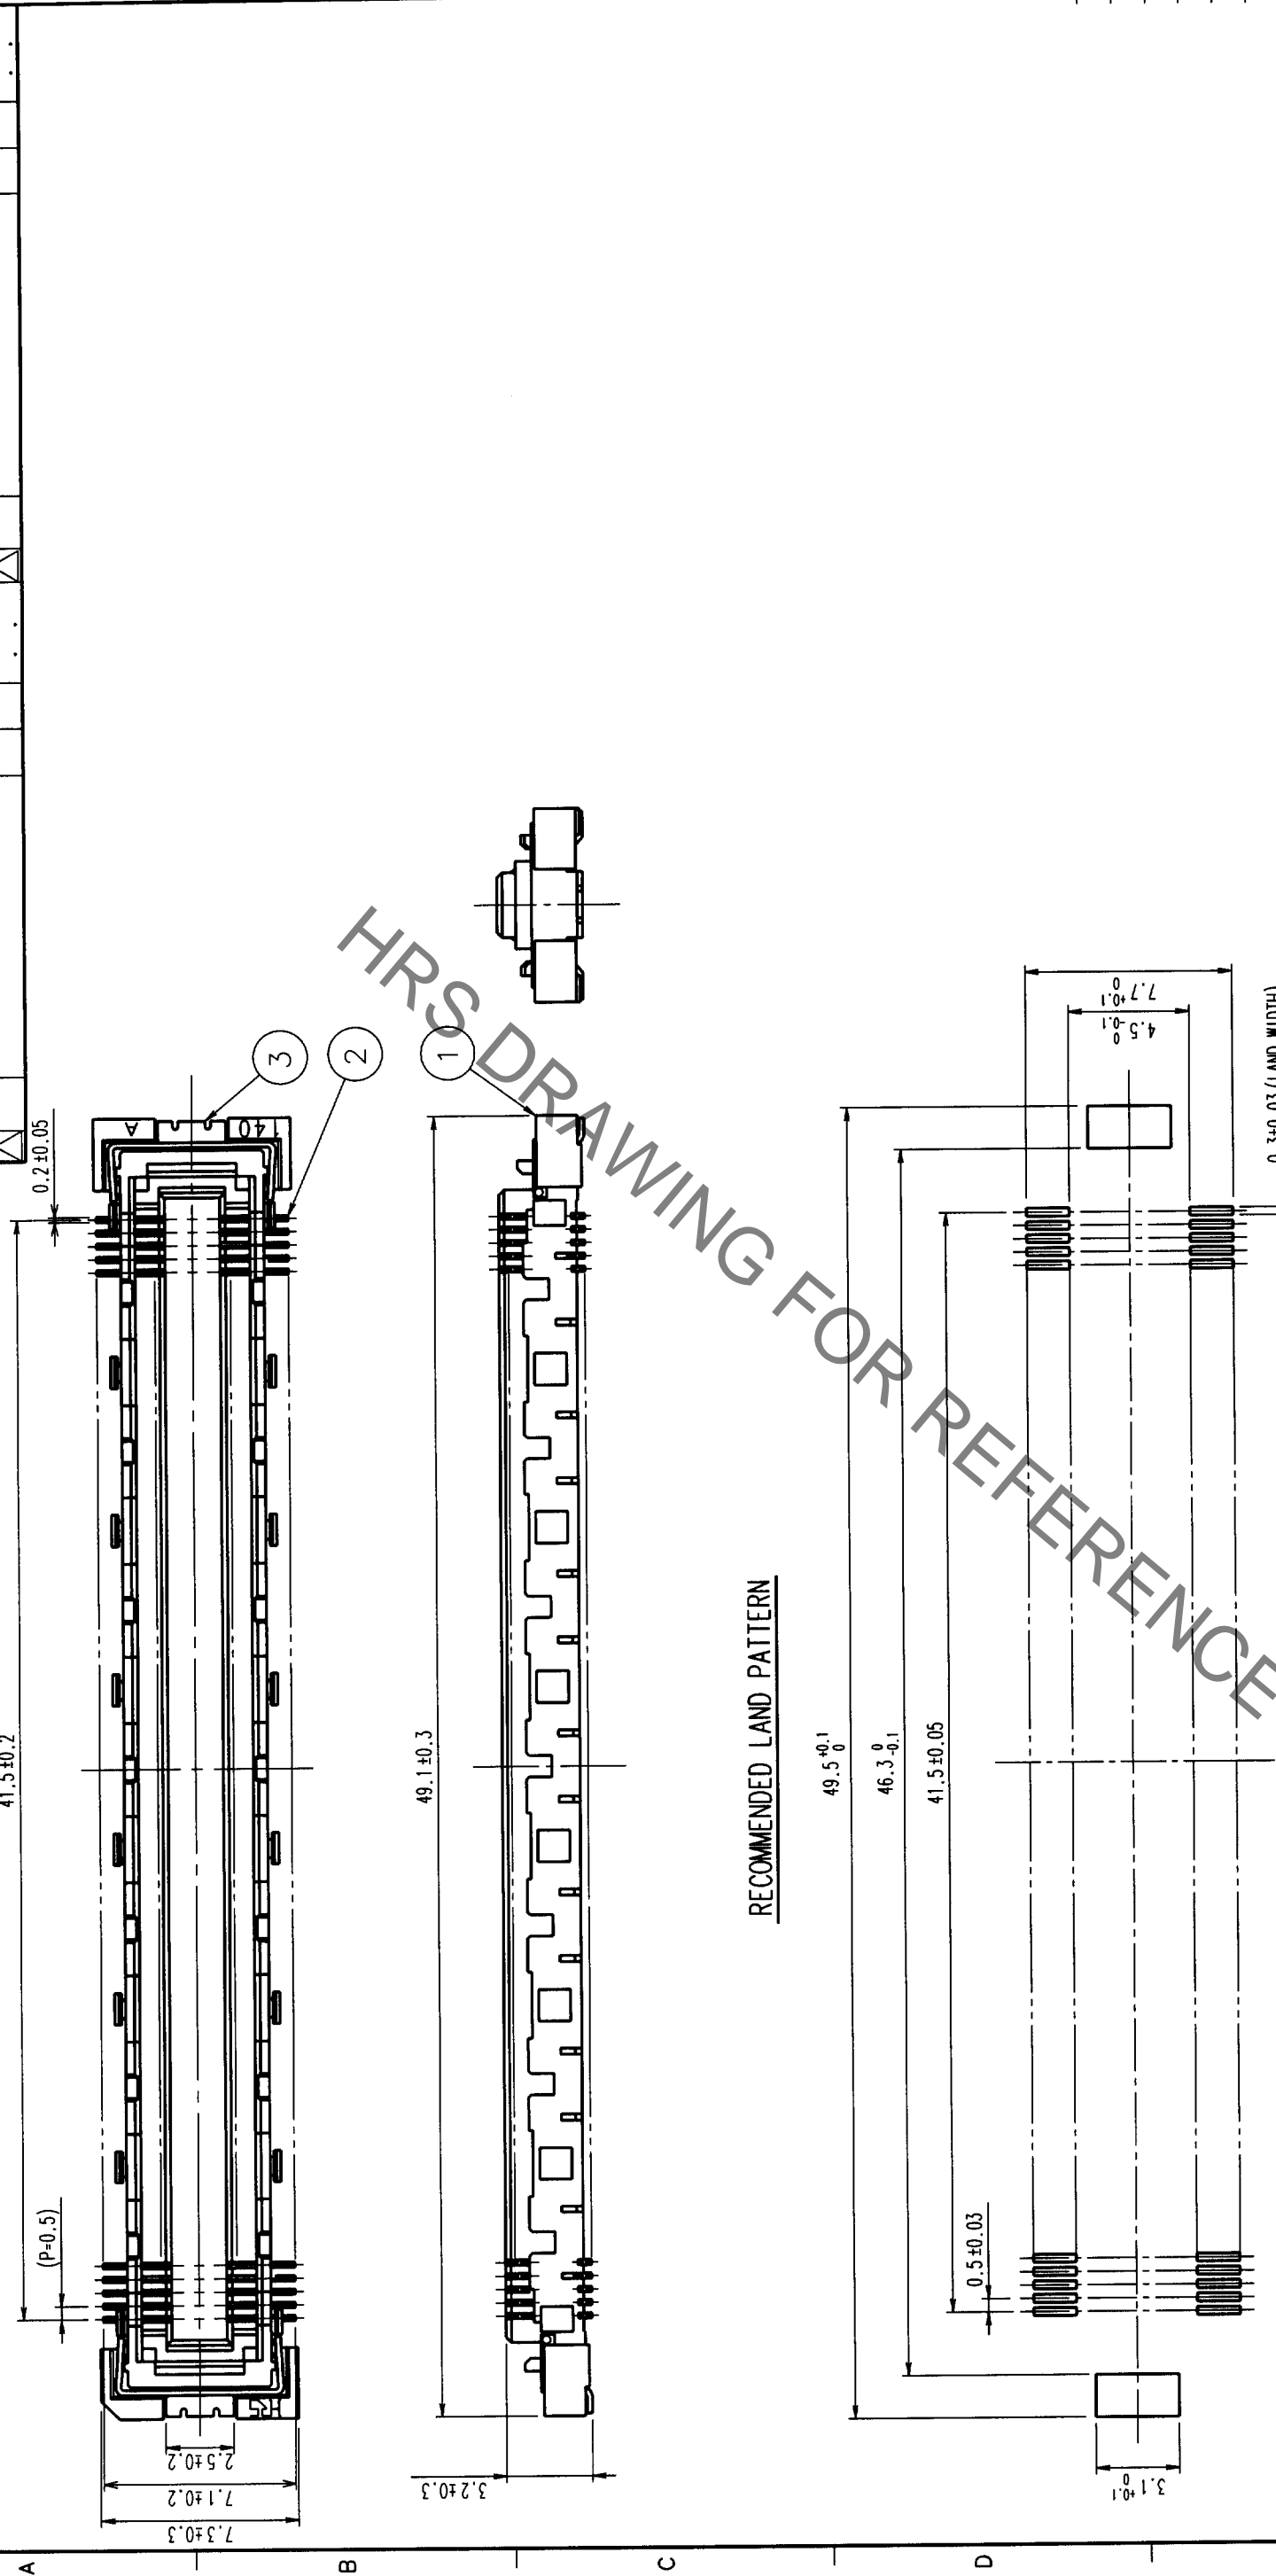

NOTES

- 1 SMT LEAD-COPLANARITY: 0.1 MAX.
- 2 THIS PRODUCT HAS NO POLARITY TO MOUNT ON THE RECOMMENDED LAND PATTERN.

NO.	MATERIAL	FINISH, REMARKS
3	PHOSPHOR BRONZE	TIN PLATED
2	PHOSPHOR BRONZE	CONTACT AREA: GOLD (0.1μm) OVER NICKEL LEAD: GOLD PLATED (FLASH) OVER NICKEL
1	LCP	BEIGE UL94V-0

NO.	MATERIAL	FINISH, REMARKS	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
CL			J. Takada	J. Takada	M. Sakata	J. Yoshimura	
			99.10.18	99.10.18	99.10.18	99.10.18	

TO	
PCK	

DRAWING NO.	EDC3-151991
PART NO.	FX10B-168S-SV
CODE NO.	CL570-0254-0
UNITS	mm
SCALE	4 : 1

HRS HIROSE ELECTRIC CO., LTD.	
1	1