
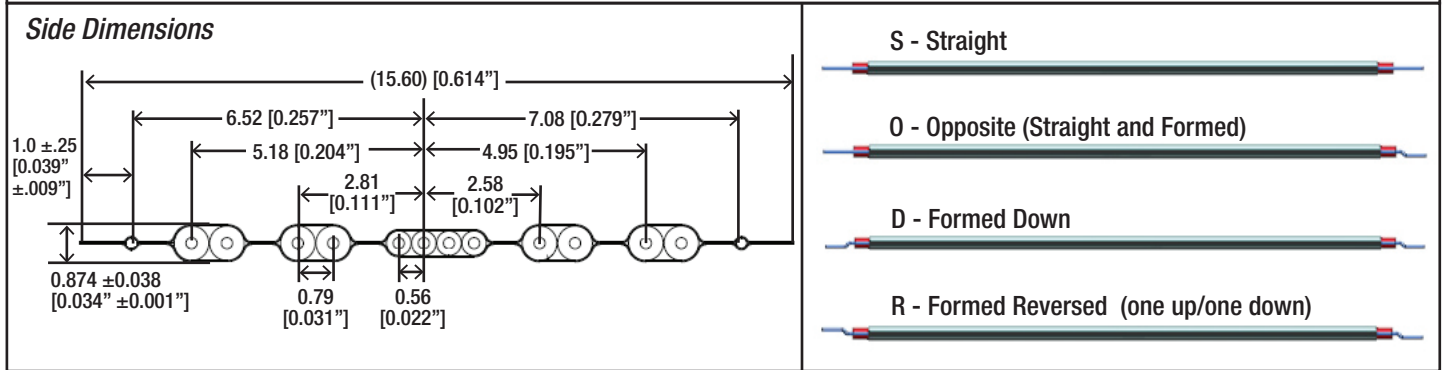


# 3M™ TWIN AXIAL CABLE CUSTOM CUTS

<p><b>SL8801/12-10DA5-00</b></p> <p><i>Typical Application</i> SFF 8087 miniSAS with sidebands, other high speed 100 ohm twin axial applications</p> <p><i>Construction</i> DPPBBBBPPD    D = drain wire                          P = pair                          B = sideband insulated conductor</p>	<p><b>PART NUMBERING SYSTEM</b></p> <p>SL8801/12 - 10DA5 - <input type="text"/> - <input type="text"/></p> <p style="text-align: right; border: 1px solid black; padding: 2px;">min length 6"</p> <div style="border: 1px solid black; padding: 5px; margin-top: 10px;"> <p>S - Straight O - Opposite (Straight and Formed) D - Formed Down R - Formed Reversed (one up/one down)</p> </div>
--	--

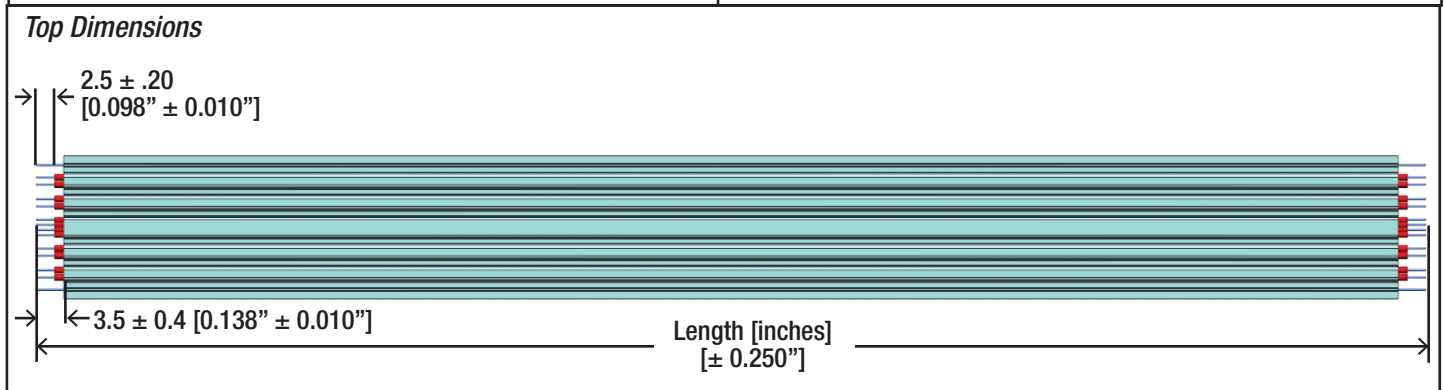

Length is in inches all other dimensions are in mm [inches]

Conductor length is determined before lead forming

Digi-Key can offer you a quote on your secondary services. For more information on 3M available options or if you need assistance, contact [CustomCut.3MProducts@digikey.com](mailto:CustomCut.3MProducts@digikey.com). Please send dimensional drawings to the aforementioned e-mail address.