


6	5	4	3	2	1
PART NUMBER	TITLE	CABLE DESCRIPTION	LENGTH 'L'	CABLE COLOR	
2174711221	ULTRA-FIT F-S 75MM 16 AWG LEADS BK Au	1X16AWG DISC SR-PVC BK UL 1061 HKUP	75±3	BLACK	
2174711222	ULTRA-FIT F-S 150MM 16 AWG LEADS BK Au	1X16AWG DISC SR-PVC BK UL 1061 HKUP	150±5	BLACK	
2174711223	ULTRA-FIT F-S 225MM 16 AWG LEADS BK Au	1X16AWG DISC SR-PVC BK UL 1061 HKUP	225±5	BLACK	
2174711224	ULTRA-FIT F-S 300MM 16 AWG LEADS BK Au	1X16AWG DISC SR-PVC BK UL 1061 HKUP	300±5	BLACK	
2174711225	ULTRA-FIT F-S 450MM 16 AWG LEADS BK Au	1X16AWG DISC SR-PVC BK UL 1061 HKUP	450±5	BLACK	
2174712221	ULTRA-FIT F-S 75MM 16 AWG LEADS RD Au	1X16AWG DISC SR-PVC RD UL 1061 HKUP	75±3	RED	
2174712222	ULTRA-FIT F-S 150MM 16 AWG LEADS RD Au	1X16AWG DISC SR-PVC RD UL 1061 HKUP	150±5	RED	
2174712223	ULTRA-FIT F-S 225MM 16 AWG LEADS RD Au	1X16AWG DISC SR-PVC RD UL 1061 HKUP	225±5	RED	
2174712224	ULTRA-FIT F-S 300MM 16 AWG LEADS RD Au	1X16AWG DISC SR-PVC RD UL 1061 HKUP	300±5	RED	
2174712225	ULTRA-FIT F-S 450MM 16 AWG LEADS RD Au	1X16AWG DISC SR-PVC RD UL 1061 HKUP	450±5	RED	

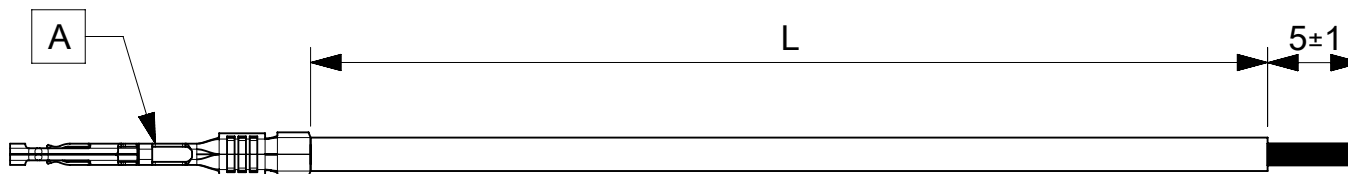

ITEM	PART#	DESCRIPTION	QTY	UOM
A	1722536012	ULTRA-FIT CRIMP TERM 16-18 30MI Form	1	PC

- NOTES:
1. CRIMPING TO BE DONE AS PER MOLEX STANDARDS.
  2. THE PRODUCT SPECIFICATION RELIES ON THE TERMINALS & WIRE SPEC.
  3. FREE END MUST BE STRIPPED, TWISTED & TINNED. THE LENGTH OF TINNING IS 5±1MM. TINNING DIA MUST BE 1.9MM MAX.

REVISION				
DATE	REV	DESCRIPTION	CHANGER	
2021/02/05	A	INITIAL RELEASE	ARAJU	
DOCUMENT STATUS	P1	RELEASE DATE	2021/02/05	09:09:24

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						
	DIMENSION UNITS	SCALE	CURRENT REV DESC:				
$\frac{F}{A} = 0$	mm	NTS	<p><b>molex</b></p> <p>SEE TABLE</p> <p>PRODUCT CUSTOMER DRAWING</p> <p>EC NO: 654817  DRWN: ARAJU 2020/12/03  CHK'D: RDESAI01 2021/02/05  APPR: RDESAI01 2021/02/05</p> <p>INITIAL REVISION:  DRWN: ARAJU 2020/12/03  APPR: RDESAI01 2021/02/05</p>				
$\frac{F}{E} = 0$	GENERAL TOLERANCES (UNLESS SPECIFIED)						
$\frac{F}{P} = 0$	ANGULAR TOL	± °					
DIVISIONAL SYMBOLS	4 PLACES	±					
	3 PLACES	±					
	2 PLACES	±	DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION	
	1 PLACE	±	2174711221	PSD	000	A	
	0 PLACES	±	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER		
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	THIRD ANGLE PROJECTION	DRAWING	SERIES	SEE TABLE	GENERAL MARKET	1 OF 1