
## THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

	DIME	NSIONS - IN	[mm]				
PANDUIT PART NUMBER	L	W H		TO BE USED WITH HTAP PART NUMBERS	TO BE USED WITH CTAP PART NUMBERS	TO BE USED WITH KITS PART NUMBERS	
CVR6-1	2.00 [50.8]	1.20 [30.5]	1.26 [32.0]	HTCT6X-6X-1*	СТАР4-8, СТАР4-6, СТАР4-4	N/A	
CVR2-1	3.38 [85.9]	1.40 [35.6]	2.00 [50.8]	HTCT2-2-1*	CTAP 2-4, CTAP 2-2, CTAP 2/0-2	N/A	
CVR250-1	3.38 [85.9]	1.55 [39.4]	2.05 [52.1]	HTCT250-2-1*, HTCT250-250-1*	CTAP2/0-2/0	ACGK, ACG24K	
CVR500-1	3.86 [98.0]	1.97 [50.0]	2.66 [67.6]	N/A	СТАР4/0-2, СТАР4/0-2/0, СТАР4/0-4/0	ACGKX, ACG24K-500, ACG24KX-500	
CVR1000-1	5.62 [142.7]	2.45 [62.2]	3.72 [94.5]	N/A	N/A	N/A	

\*UL LISTED (CULus) AND CSA CERTIFIED WHEN USED WITH HTCT6X-6X-1, HTCT2-2-1, HTCT250-2-1, OR HTCT250-250-1

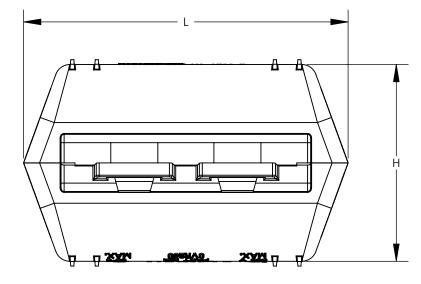

1. MATERIAL: LOW DENSITY BLACK POLYPROPYLENE

2. UL LISTED AND CSA CERTIFIED

NOTES:

- WHEN USED WITH SPECIFIED HTAPS

- MAXIMUM TEMPERATURE RATING: 90° C

- VOLTAGE RATING OF COVER: 600V

REV	DATE	BY	СНК	DESCRIPTION	ECN	-R	SUP	CHK'D	ADOVL	C41315_07
00	8/09	JHNU	JHNU	DRAWING RELEASED				DATE	NOTE 1 ABOVE	DRAWING NO / CAD FILE DWG
01	11/09	JHNU	JHNU	ADDED CVR6, CVR2, CVR500, & CVR1000 REVISED NOTES, ADDED TABLE				DRAWN BY	MAT'L: SEE	SCALE N/A
02	7/10	JHNU	JHNU	REMOVED HTCT8-8, HTCT6-6 FROM TABLE						INCHES, THIRD ANGLE PROJECTION
03	12/10	JHNU	JHNU	REVISED AGENCY LOGO	N41315BA-C41315	FLD	FLD		UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE: ALL DIMENSIONS ARE GIV	
04	1/11	JHNU	JHNU	ADDED NOTE TO SPECIFY PART IS NOT UL LISTED FOR USE WITH CTAP CONNECTORS	N41315BA-C41315	FLD	FLD	CVR H-TAP COVERS CUSTOMER DRAWING		
05	4/11	JHNU	RWK	CULUS AND CSA CERTIFIED ADDED PART NUMBERS ACGK, ACGKX, ACG24K, ACG24K-500, ACG24KX-500	N41315BA-C41315	FLD	FLD ·			
06	5/11	JHNU	JHNU	REMOVED ACG24KX FROM TABLE REVISED NOTE TO SPECIFY PARTS THAT ARE	N41315BA-C41315	FLD	FLD			
07	5/11	JHNU	JHNU	ADDED HTCT6X-6X-1 & HTCT250-2-1 TO HTAP PART NUMBER LIST COLUMN	N41315BA-C41315	RGB	RGB	5		