

Versal™ AI Core Series VCK190 Evaluation Kit

OVERVIEW

Versal™ AI Core series VCK190 evaluation kit, equipped with the best AI performance-in-portfolio VC1902 device, is built for designs requiring high throughput AI inference and signal processing compute performance. Delivering 100X greater compute power than today's server-class CPUs, with various connectivity options and standardized development flows, the VCK190 is an ideal evaluation and prototyping platform for cloud, network, and edge applications.

HIGHLIGHTS

Evaluate Versal AI Core Series Capabilities

- > Equipped with Versal ACAP VC1902 production silicon
- > AI and DSP Engines providing 100X greater compute over today's server-class CPUs
- > Pre-built partner reference designs for rapid prototyping

Breadth of Connectivity Options for Rapid Development

- > PCIe® Gen4 interface for high compute performance markets
- > HDMI for video processing applications
- > SFP28/QSFP28/RJ-45 for networking applications
- > DDR4 and LPDDR4 memory interfaces
- > FMC expansion connectors supporting a variety of optional plug-in cards

Co-Optimized Tools and Debug Method

- > Fully supported by Vivado™ ML editions, Vitis™ unified software platform, and Vitis AI




TARGET APPLICATIONS

- > Data Center Compute
- > 5G Radio & Beamforming (DFE)
- > Cable-Access (Head-End)
- > Wireless Test Equipment
- > Automotive/ADAS prototyping
- > A&D Radar, Early Warning

KIT CONTENTS


01

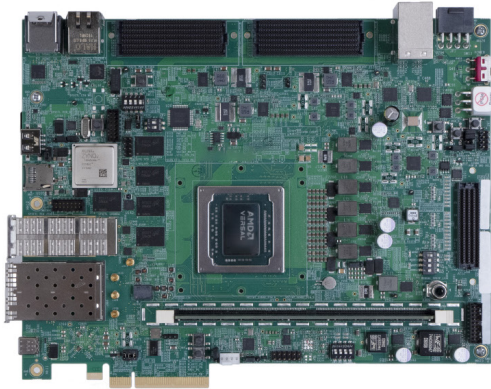

02



03



04



05



06



07



08



09



- | | |
|---|---|
| <p>01 VCK190 Evaluation Board</p> <p>02 QSPI Boot Module</p> <p>03 Pmod Module</p> <p>04 2 Ethernet Cables</p> <p>05 USB Type-C Cable</p> | <p>06 2 Micro SD Cards
- System Controller SD Card – Pre-programmed
- Versal SD Card – Blank</p> <p>07 180W (12V) Power Supply</p> <p>08 PCIe® Bracket</p> <p>09 Vivado™ Design Suite</p> |
|---|---|

TAKE THE NEXT STEP

To purchase or to learn more about the Versal AI Core series VCK190 evaluation kit, visit www.xilinx.com/vck190

DISCLAIMERS

The information contained herein is for informational purposes only and is subject to change without notice. While every precaution has been taken in the preparation of this document, it may contain technical inaccuracies, omissions and typographical errors, and AMD is under no obligation to update or otherwise correct this information. Advanced Micro Devices, Inc. makes no representations or warranties with respect to the accuracy or completeness of the contents of this document, and assumes no liability of any kind, including the implied warranties of noninfringement, merchantability or fitness for purposes, with respect to the operation or use of AMD hardware, software or other products described herein. No license, including implied or arising by estoppel, to any intellectual property rights is granted by this document. Terms and limitations applicable to the purchase or use of AMD's products are as set forth in a signed agreement between the parties or in AMD's Standard Terms and Conditions of Sale.

COPYRIGHT NOTICE

© Copyright 2023 Advanced Micro Devices, Inc. All rights reserved. Xilinx, the Xilinx logo, AMD, the AMD Arrow logo, Alveo, Artix, Kintex, Kria, Spartan, Versal, Vitis, Virtex, Vivado, Zynq, and other designated brands included herein are trademarks of Advanced Micro Devices, Inc. Other product names used in this publication are for identification purposes only and may be trademarks of their respective companies. AMBA, AMBA Designer, ARM, ARM1176JZ-S, CoreSight, Cortex, and PrimeCell are trademarks of ARM in the EU and other countries. PCIe, and PCI Express are trademarks of PCI-SIG and used under license. PID1846750

