
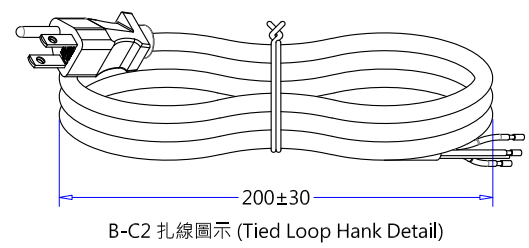
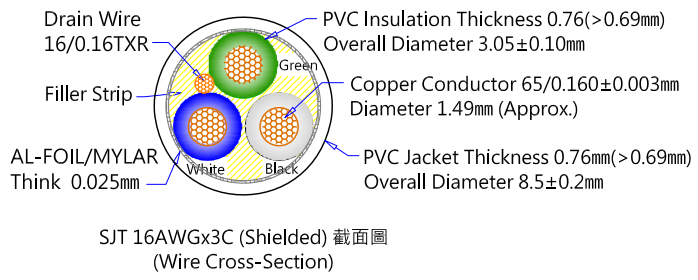



插頭部件 (Plug Component)			頭部剝皮尺寸 (Dimensions)			線材規格 (Wire Styls)	尾部剝皮尺寸 (Dimensions)			端子規格 (Termianl Style)	
顏色(Color)	零件描述(Component)	Qty.	內剝(Strip)	外剝(ROJ)	顏色(Color)	SJT 16AWGx3C (Shielded, A+E)  105°C 黑色 (Black)  Length : 2000±50 (78.7"±2")	外剝(ROJ)	內剝(Strip)	顏色(Color)	規格描述(Instruction)	端子編號(Style No.)
35P 黑色 (Black)	ME-301 (NEMA 5-15P)	1	6 <sup>+1</sup> <sub>-0</sub>	22 ± 2	黑/Black(L)		50.8±5	6.35±3	黑/Black(L)	絕緣依尺寸剝除，留膠於線上(半剝) (Strip and Retain outside Insulated)	
鍍鎳 (Nickel-Plated)	Ø4.75 圓管端子 (Earth Pins Terminal)	1	6 <sup>+1</sup> <sub>-0</sub>	22 ± 2	白/White(N)		50.8±5	6.35±3	白/White(N)	絕緣依尺寸剝除，留膠於線上(半剝) (Strip and Retain outside Insulated)	
鍍鎳 (Nickel-Plated)	6.3*1.5 單片圓頭端子 (Solid Blades)	2	6 <sup>+1</sup> <sub>-0</sub>	22 ± 2	綠/Green(E)		50.8±5	6.35±3	綠/Green(E)	絕緣依尺寸剝除，留膠於線上(半剝) (Strip and Retain outside Insulated)	
黑色 (Black)	301-1 兩件式內模 (301-1 Inner Body)	1									

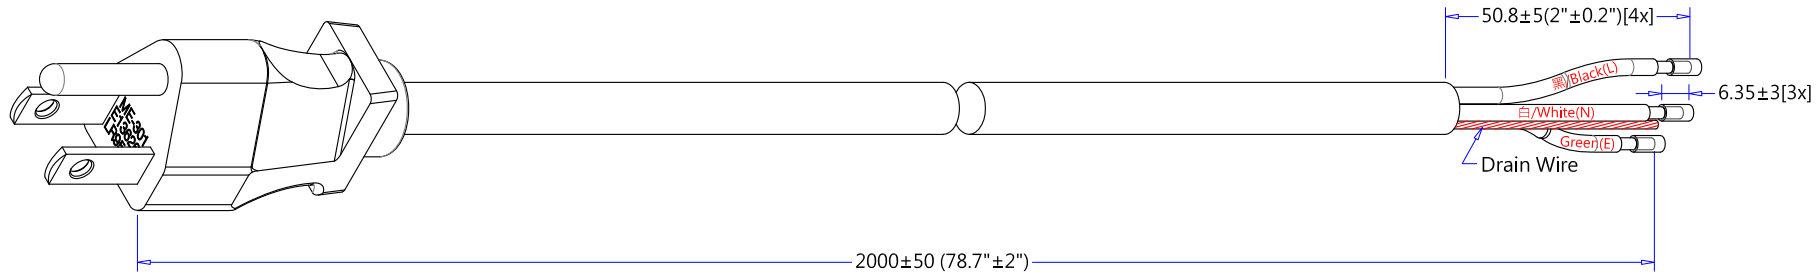

REV	DATE	REVISE CONTENT
A	09/25-2012	The first edition is issued and drawing.
F		

**NOTE:**

- Hi-Pot Test : 1500V/1Sec ; <0.5mA.
- Insulation Resistance Test : DC 500/min>100 meg-ohm.
- Continuity & Polarization Test : No short circuit, break circuit, displacement.
- Each end terminal shall be capable of withstanding a pull of 25lbs for 1 minutes without loosening.
- Strain relief shall be capable of withstanding a pull of 35lbs for 1 minutes without loosening.
- All material according to Non-toxic standard.(Material must be RoHS compliant.)

線材印字 (Wire Printed)	充麻, 油墨印字 (Fillers, Printing Ink)			<b>CnC Tech, LLC</b> Industrial Cable and Connector Technology			
包裝方式 (Packing)		DRAWN					
Tied Hank	See Hank Detail	Chu8.		CUSTOMER	CnC		
Carton Size	480 x 320 x 230	DATE		P/N No.	800-1601-2-SJT0-BL-00200		
Pack Number	75 pcs/ UL Laster Labels	09/25-2012		MATERIAL	PVC	UNIT	mm
Carton Print	See Purchase Order	NEMA 5-15P to ROJ(S&R) Shielded Power Supply Cord		Customer Approval			
TYPE							
DRAWING NO.	098MM1043	REV	A				

業務校閱：  
品質校閱：