
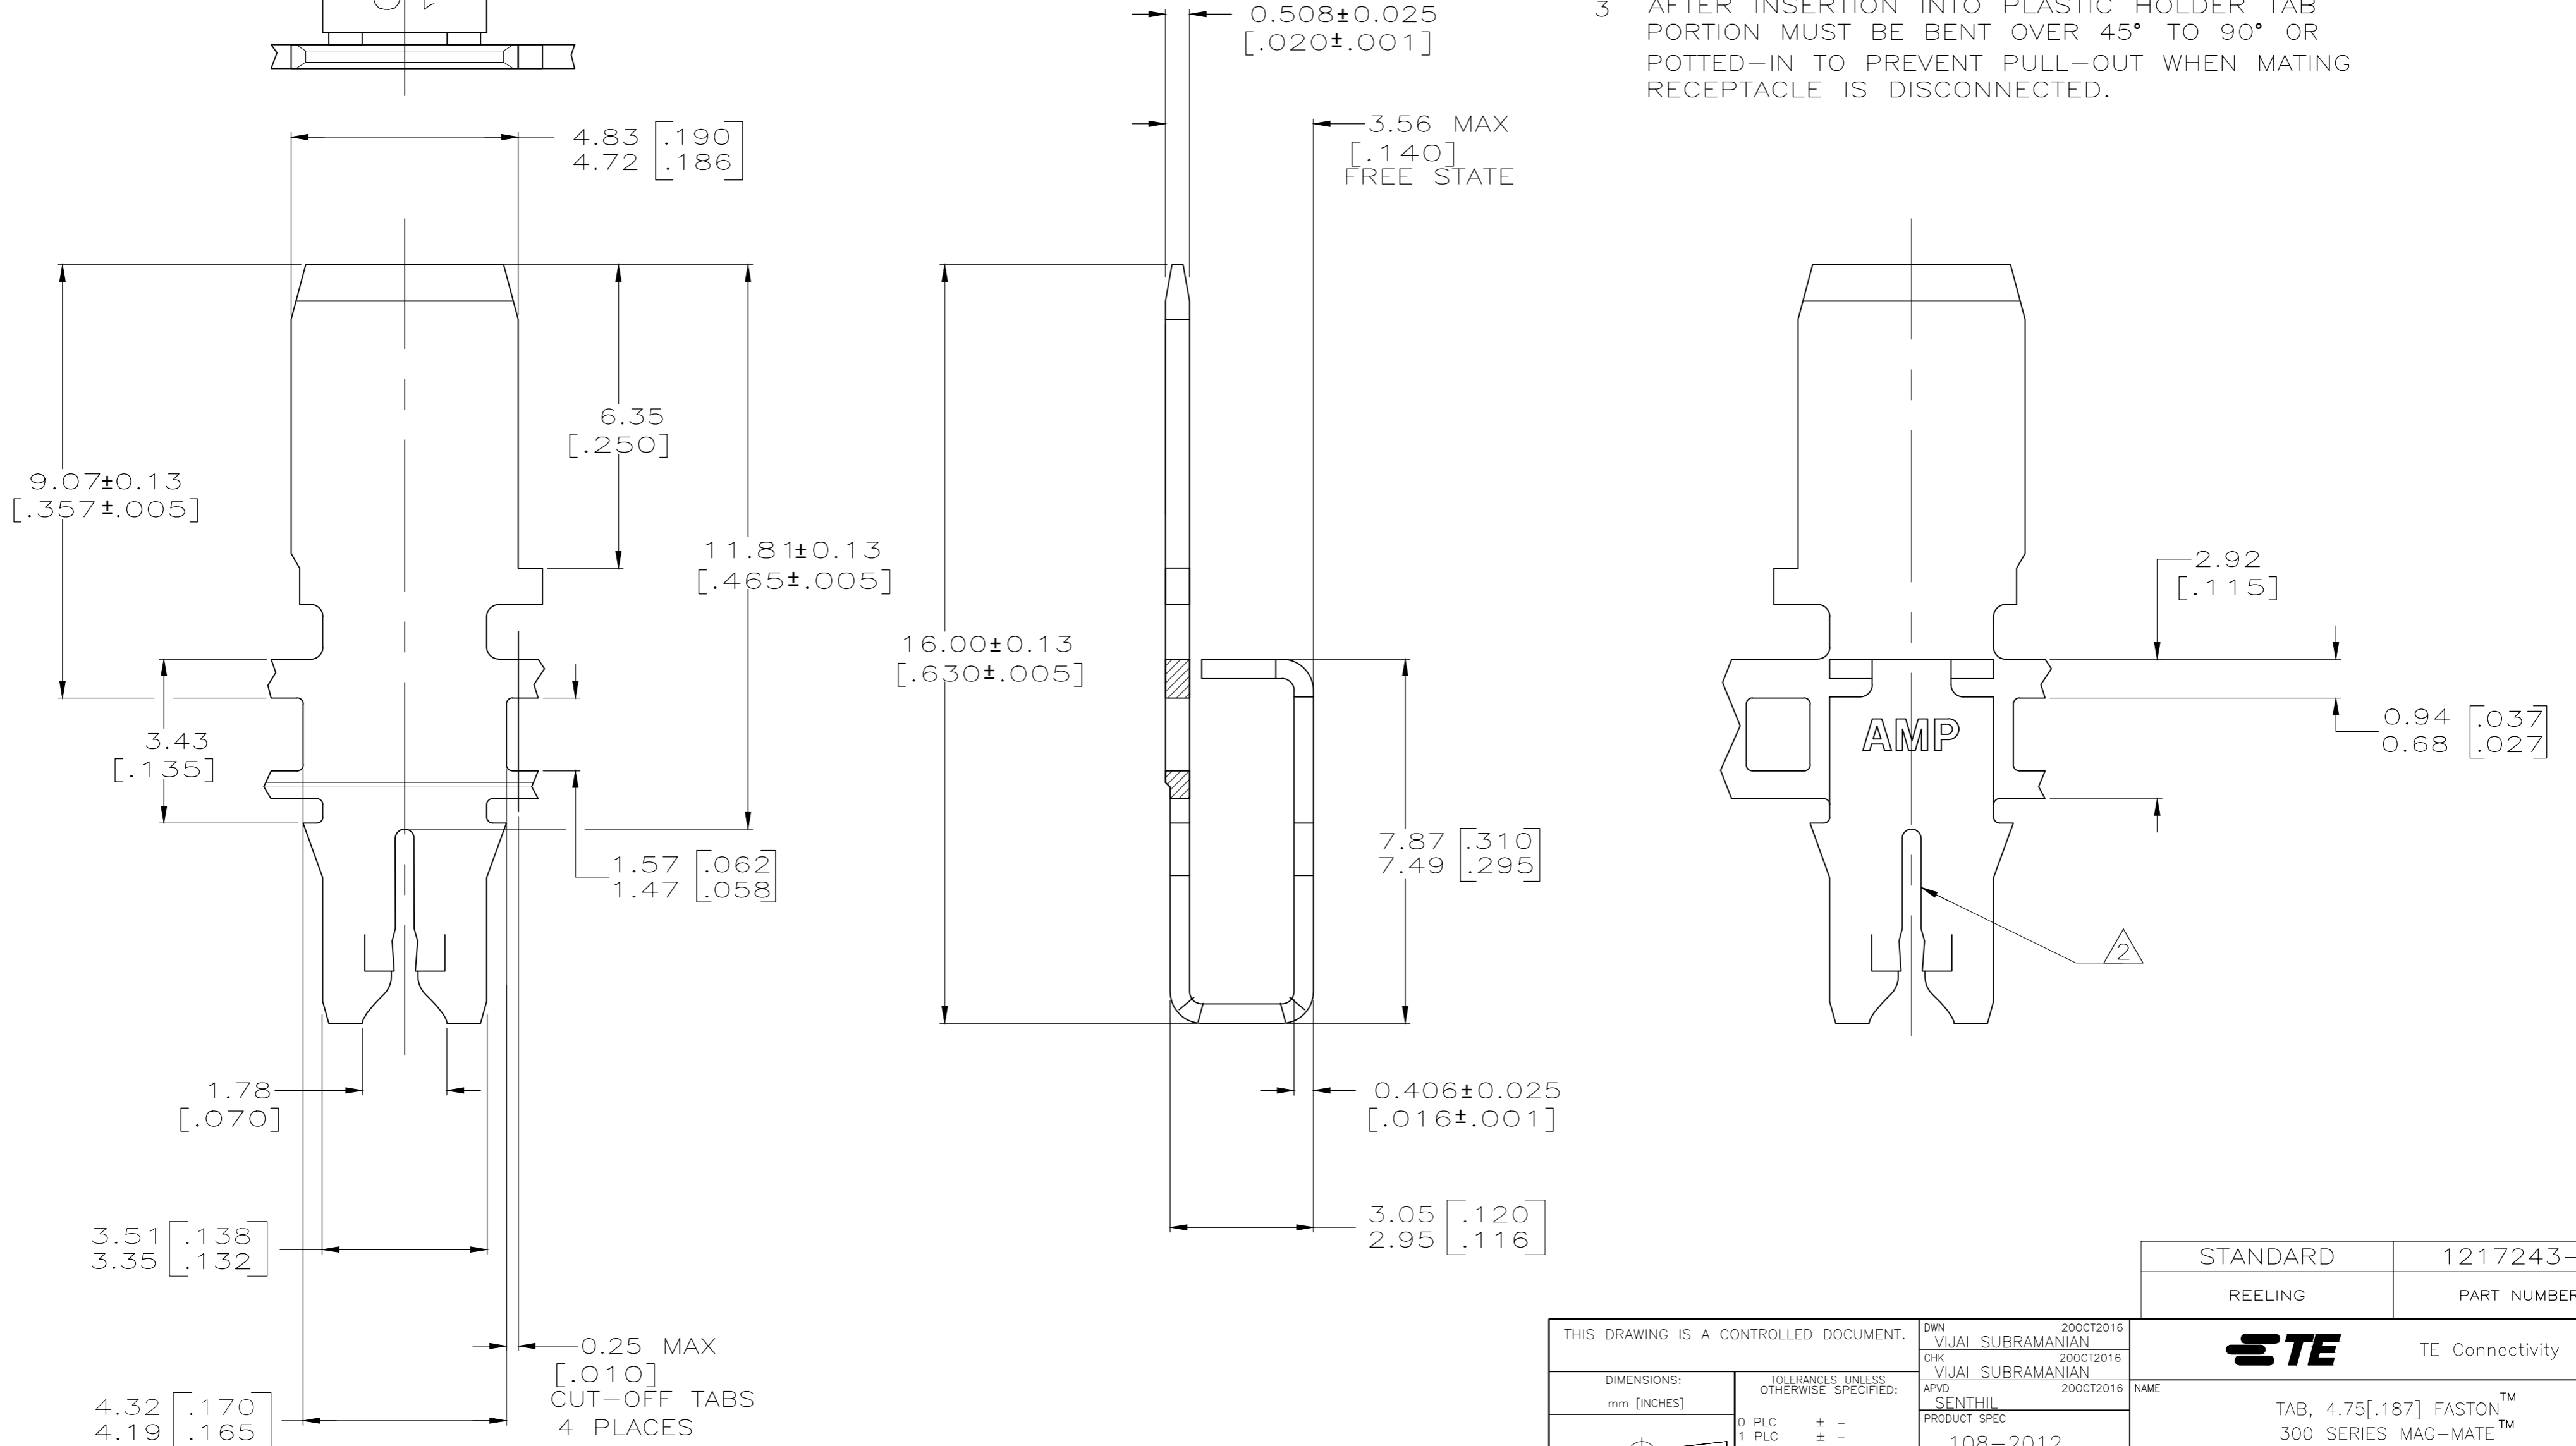


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT 2002 BY TE CONNECTIVITY ALL RIGHTS RESERVED.

REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN APVD
E1		REVISED PER ECR-18-007294	21MAR2019	BDA SV

- CONTINUOUS STRIP ON REELS (SPLICE FREE) WITH TERMINALS LOCATED ON 5.59 ± 0.08 [$.220 \pm .003$] CENTERS.
- SLOT TERMINATES A SINGLE OR DOUBLE MAGNET WIRE. COPPER RANGE: 0.36-0.57mm [#27-#23] AWG. OR ALUMINIUM RANGE: 0.51-0.64mm [#24-#22] AWG. ALUMINIUM RANGE IS APPLICABLE FOR POST TIN PLATED PART NUMBERS ONLY.
- AFTER INSERTION INTO PLASTIC HOLDER TAB PORTION MUST BE BENT OVER 45° TO 90° OR POTTED-IN TO PREVENT PULL-OUT WHEN MATING RECEPTACLE IS DISCONNECTED.

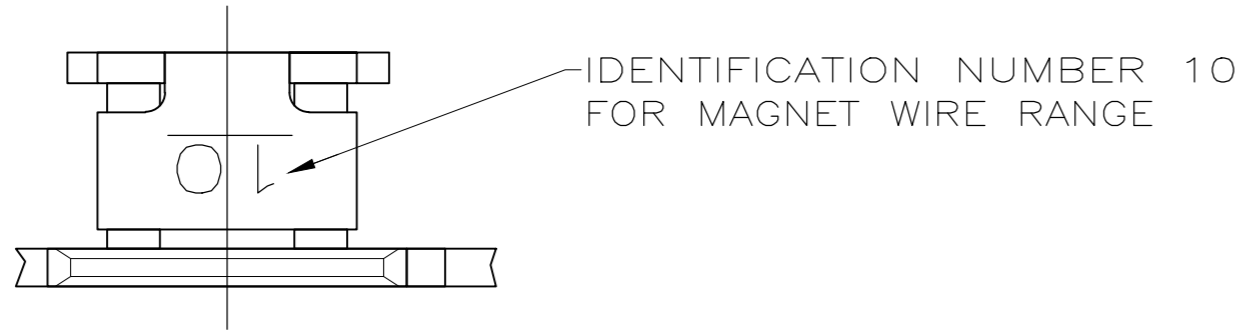

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 200CT2016 VIJAI SUBRAMANIAN	STANDARD 1217243-1	
DIMENSIONS: mm [INCHES]		CHK 200CT2016 VIJAI SUBRAMANIAN	REELING PART NUMBER	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 200CT2016 SENTHIL	TE Connectivity	
0 PLC ± -	1 PLC ± -	PRODUCT SPEC 108-2012	NAME TAB, 4.75[.187] FASTON™ 300 SERIES MAG-MATE™	
2 PLC ± 0.25[.010]	3 PLC ± -	APPLICATION SPEC 114-2046	SIZE A2	CAGE CODE 00779
4 PLC ± -	ANGLES ± 1°	MATERIAL 4M PRE-MILLED BRASS	DRAWING NO C=1217243	RESTRICTED TO -
FINISH 0.002032[.000080] MIN TIN PLATE		WEIGHT 0	SCALE 10:1	SHEET 1 OF 1
CUSTOMER DRAWING		REV E1		

1217243