
THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES,
ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED
WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES.
ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

ALL DIMENSIONS ARE REFERENCE ONLY

| PAR | T NO. | RFB-1734 | | | |
|-----|---------------------|---------------------------------------|-----|---------|----------|
| REV | | DESCRIPTION | DWN | DATE | APPROVED |
| _ | ENGINEERING RELEASE | | czs | 5/11/99 | JDMc |
| | | | | | |
| | | · · · · · · · · · · · · · · · · · · · | | | |
| | | | | | |

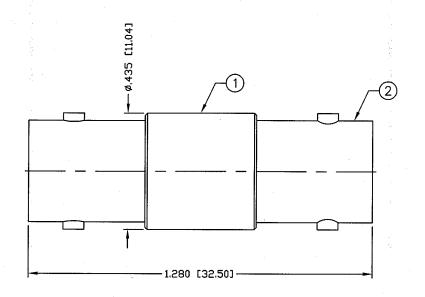

SPECIFICATIONS:

IMPEDANCE: 75 Ohm

FREQUENCY RANGE: 0-2 GHz

WORKING VOLTAGE: 500 V rms max. @ sea level

TEMPERATURE RANGE: -65°C TO 165°C INSULATION RESISTANCE: 5k M Ohms min.

| 1 BODY 2 BNC BODY 3 INSULATOR 4 CONTACT 5 | 1 BRASS 1 BRASS 2 PTFE 1 PHOS. BRONZE | NICKEL, 100μ" NICKEL, 100μ" GOLD, 3μ" | 008974 | UNLESS OTHERWISE SPECIFIED: 1. REMOVE ALL BURRS 2. BREAK ALL CORNERS & EDGES .005 R. MAX. 3. CHAMFER 1ST & LAST THREADS .45' 4. SURFACE ROUGHNESS 63 FINISH MIL-STD-10 5. DIAMETERS ON COMMON CENTERS TO BE | |
|---|---------------------------------------|--|--------------------------------------|--|---|
| 7 8 9 | | | DRAWN C. ZUNIGA 8/6/01 | CONCENTRIC WITHIN .002 T.I.R. 6. ALL DIMENSIONS ARE AFTER PLATING. DIMENSIONS ARE IN INCHES AND [MILLIMETERS] UNLESS OTHERWISE NOTED | BNC JACK TO JACK 75 OHM ADAPTER |
| 12 13 14 # DESCRIPTION | QTY MATERIAL | FINISH | ORJ DRAWN C. ZUNIGA APPROVALS DATE | TOLERANCES ARE: DECIMALS .XXX±.003 [.08] .XX±.005 [.13] .XX±.003 [.08] | SIZE CABLE GROUP A DWG NO. REV — SCALE: NTS CAD FILE OUTLINE SHEET 1 OF 1 |