




COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
1	RE-F-06821	J.M	H.O	00.04.06					

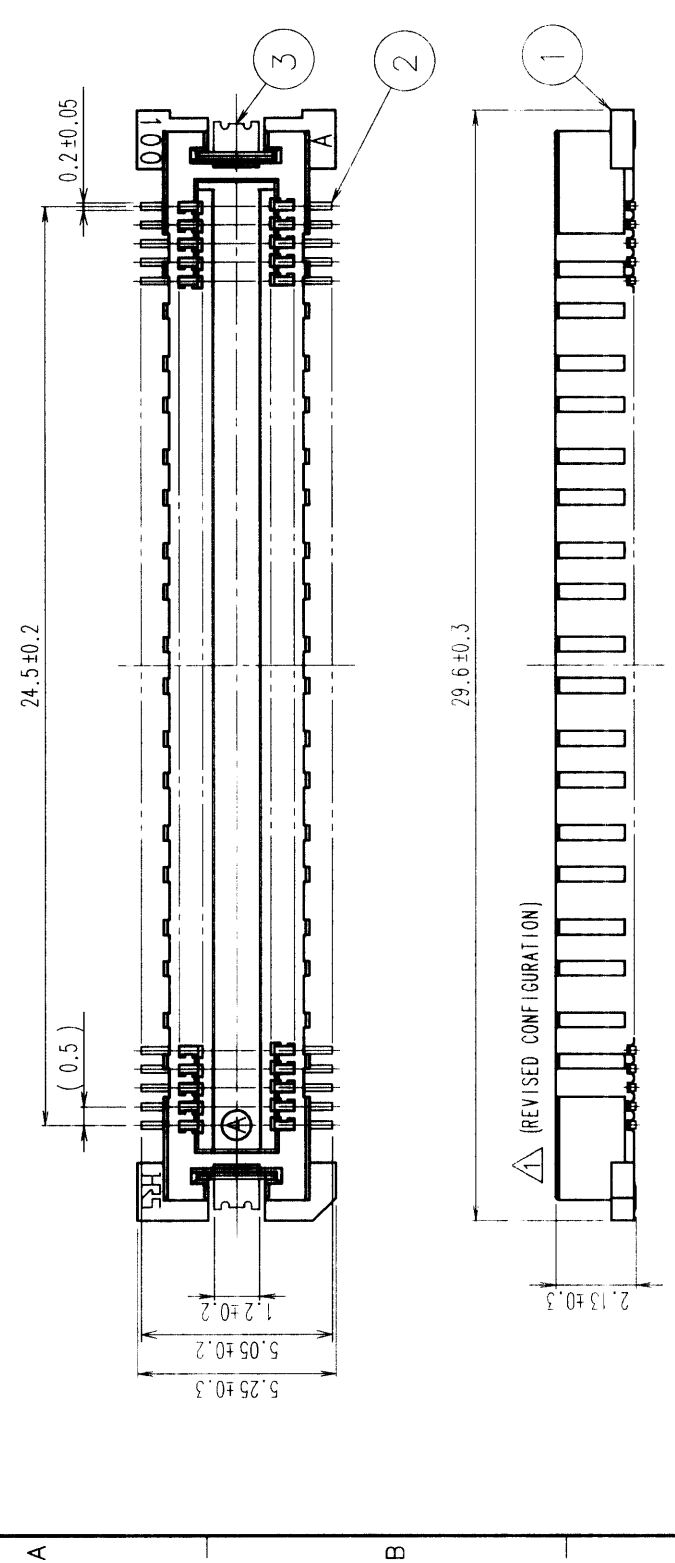

RECOMMENDED LAND PATTERN DIMENSION OF PCB

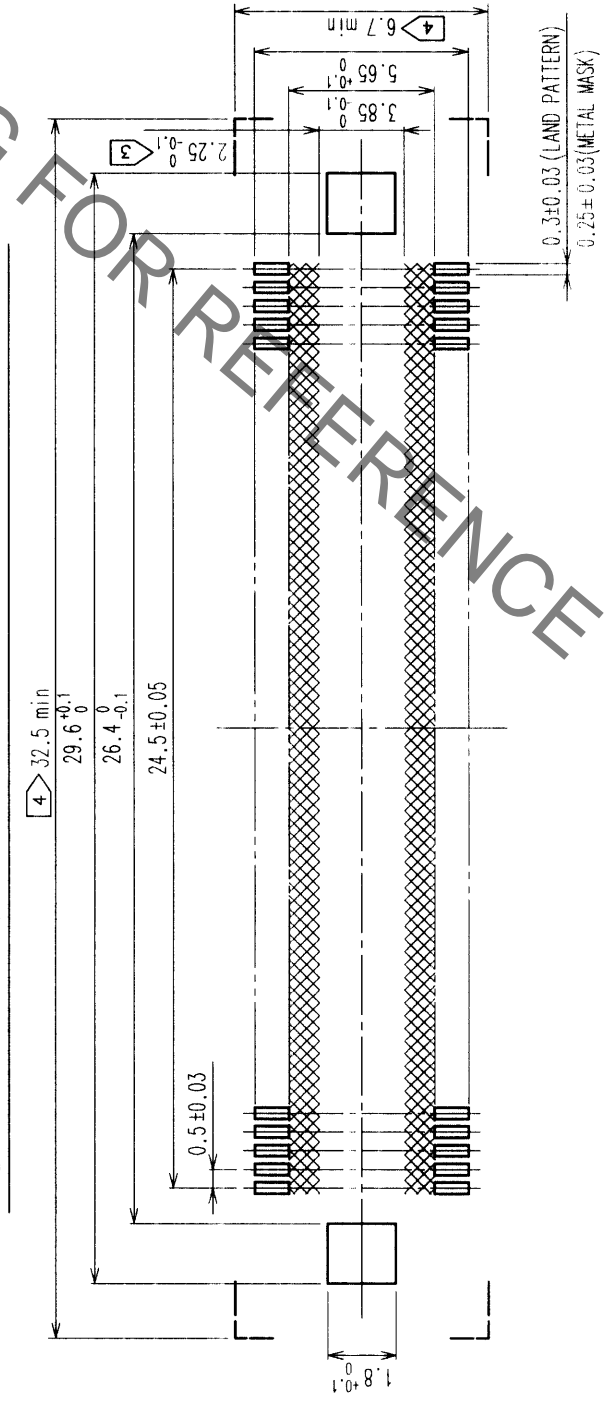

SIGNAL PORTION CROSS SECTION (10:1)

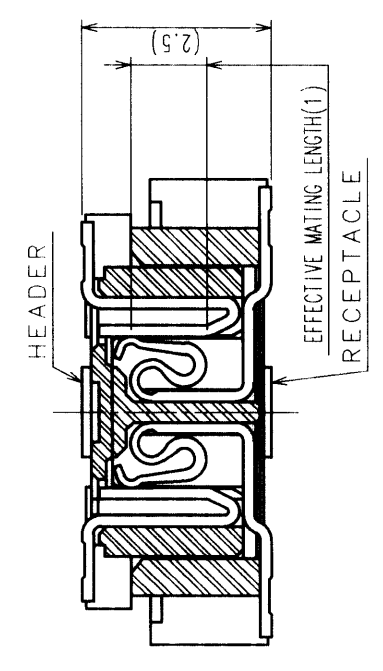

- NOTES
- SMT LEAD-COPLANARITY: 0.1 MAX.
 - THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
 - DO NOT MOUNT OTHER DEVICES ONTO [] AREA, OR MATING PAIR CANNOT BE MATED.

2	COPPER ALLOY	CONTACT AREA: GOLD (0.1µm) OVER NICKEL								
1	LCP	LEAD: GOLD FLASH OVER NICKEL								
NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH
	CL	BEIGE	UL94V-0	3	PHOSPHOR BRONZE	TIN PLATED				
CODE NO. (OLD)		DRAWN		DESIGNED		CHECKED		APPROVED		RELEASED
		J.MATSUKAWA		J.MATSUKAWA		M.ISHIDA		Y.YOSHIMURA		
		00.01.15		00.01.15		00.01.17		00.01.17		
DRAWING NO.	EDC3-152610		PART NO.		FX11B-100P-SV					
SCALE	5 : 1		CODE NO.		CL573-0553-0					
UNITS	mm		HRS		HIROSE ELECTRIC CO., LTD.					

TO	
PCK	