



In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents. 7

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					△				
△					△				
△					△				

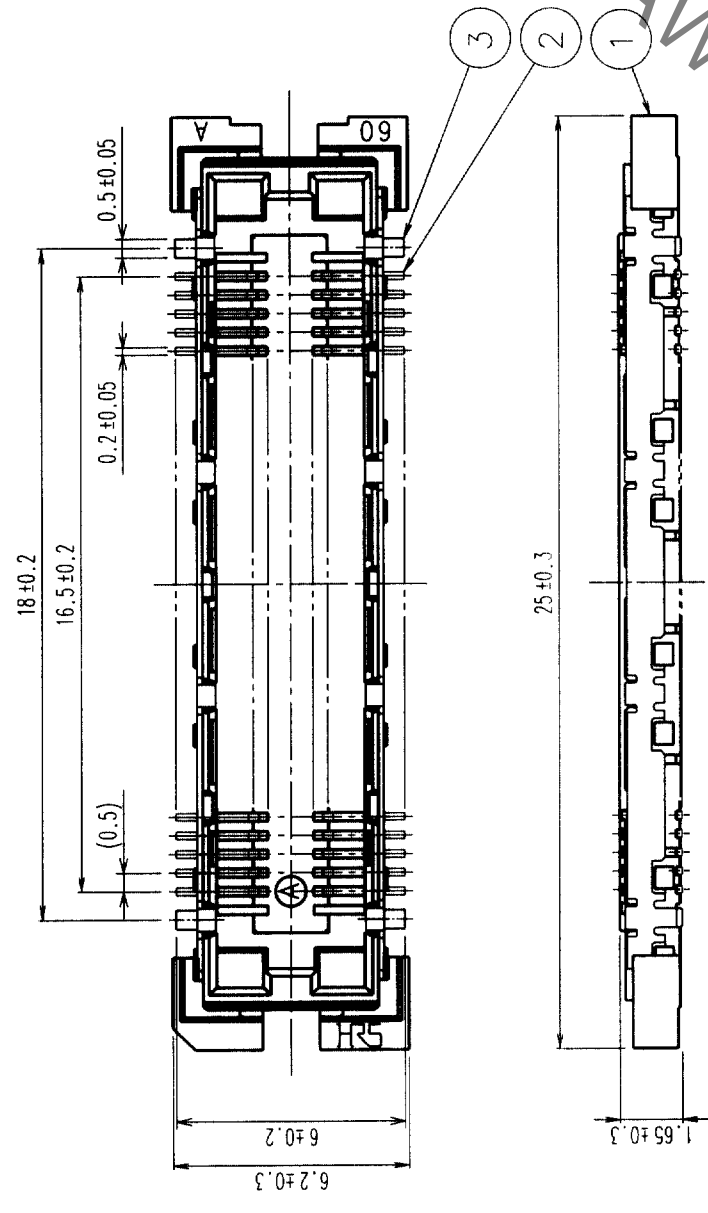

RECOMMENDED LAND PATTERN DIMENSION OF PCB

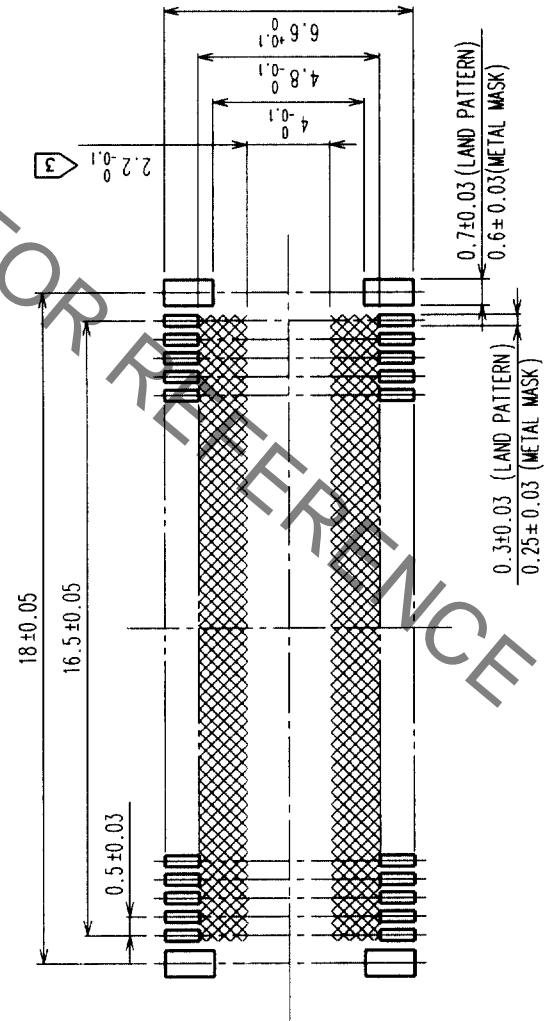

- NOTES
- SMT LEAD-COPLANARITY: 0.1 MAX.
 - THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)

2	PHOSPHOR BRONZE	CONTACT AREA: GOLD (0.1μm) OVER NICKEL LEAD: GOLD FLASH OVER NICKEL				
1	LCP	BEIGE UL94V-0				
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	TIN PLATED	
3	PHOSPHOR BRONZE		3	PHOSPHOR BRONZE	TIN PLATED	
CODE NO. (OLD)	CL	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
		S. Kitajima	M. Sakahara	M. Sakahara	T. Yoshimura	
		99.05.25	99.05.25	99.05.26	99.05.27	
DRAWING NO. EDC3-152120		PART NO. FX11LB-68S-SV		CODE NO. CL573-0152-0		1/1
SCALE 5:1		UNITS mm		HIROSE ELECTRIC CO., LTD.		8 FORM NO. 229

TO	
PCK	