



Electrical Specifications

Notch Center: 1370 MHz
Notch Bandwidth: 40 MHz
Rejection at Notch Bandwidth: 35 dB Min
Low Side Cutoff Frequency: 1330 MHz
Insertion Loss at 1330 MHz: 2.25 dB Max
High Side Cutoff Frequency: 1410 MHz
Insertion Loss at 1410 MHz: 2.75 dB Max
Low Side Passband: 300-1330 MHz
High Side Passband: 1410-1600 MHz
Power Handling: 6 Watts


Mechanical

Connector Type: SMA (F)
Dimensions: 4.50 x 1.0 x 0.63 Inches

Environmental


Operating Temperature: -40 to +85° C
Storage Temperature: -50 to +95° C

Outline Drawing:

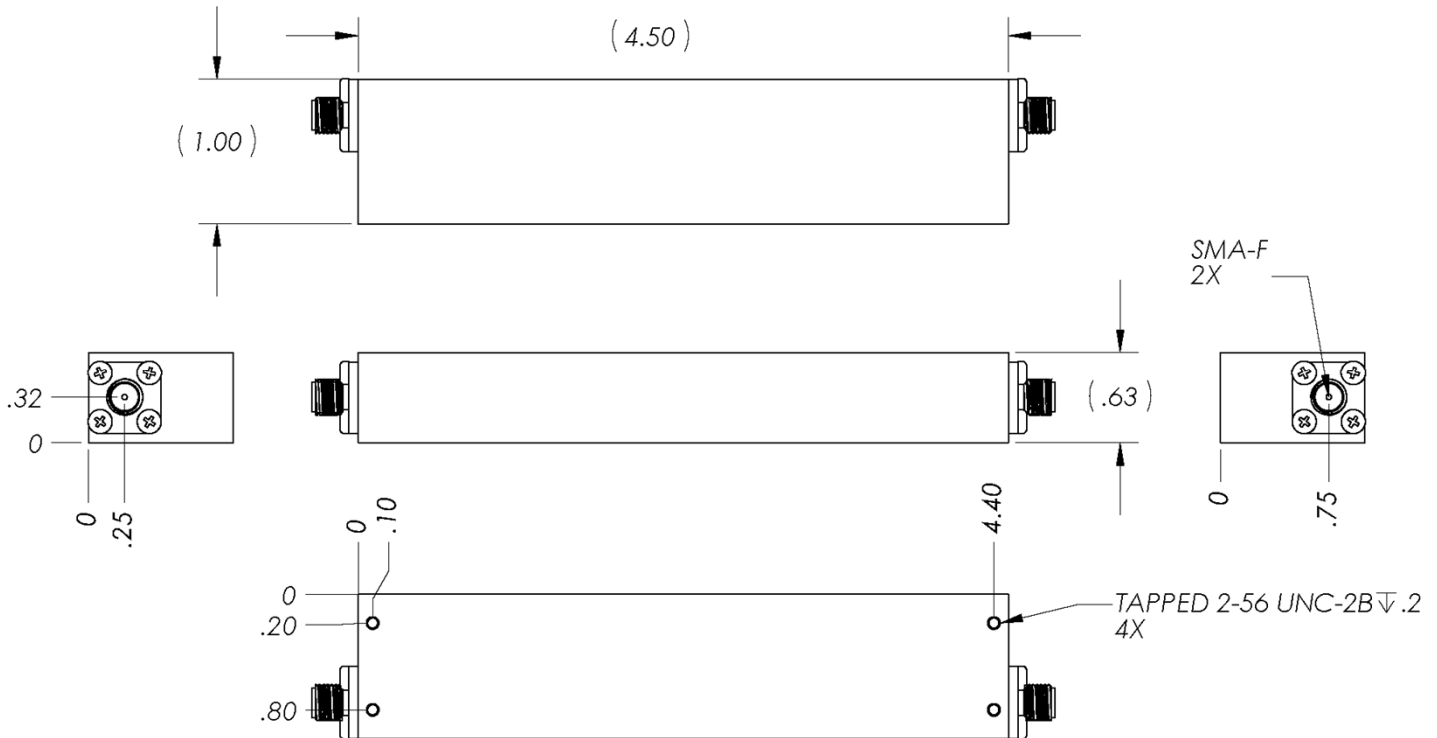



Response Plot:

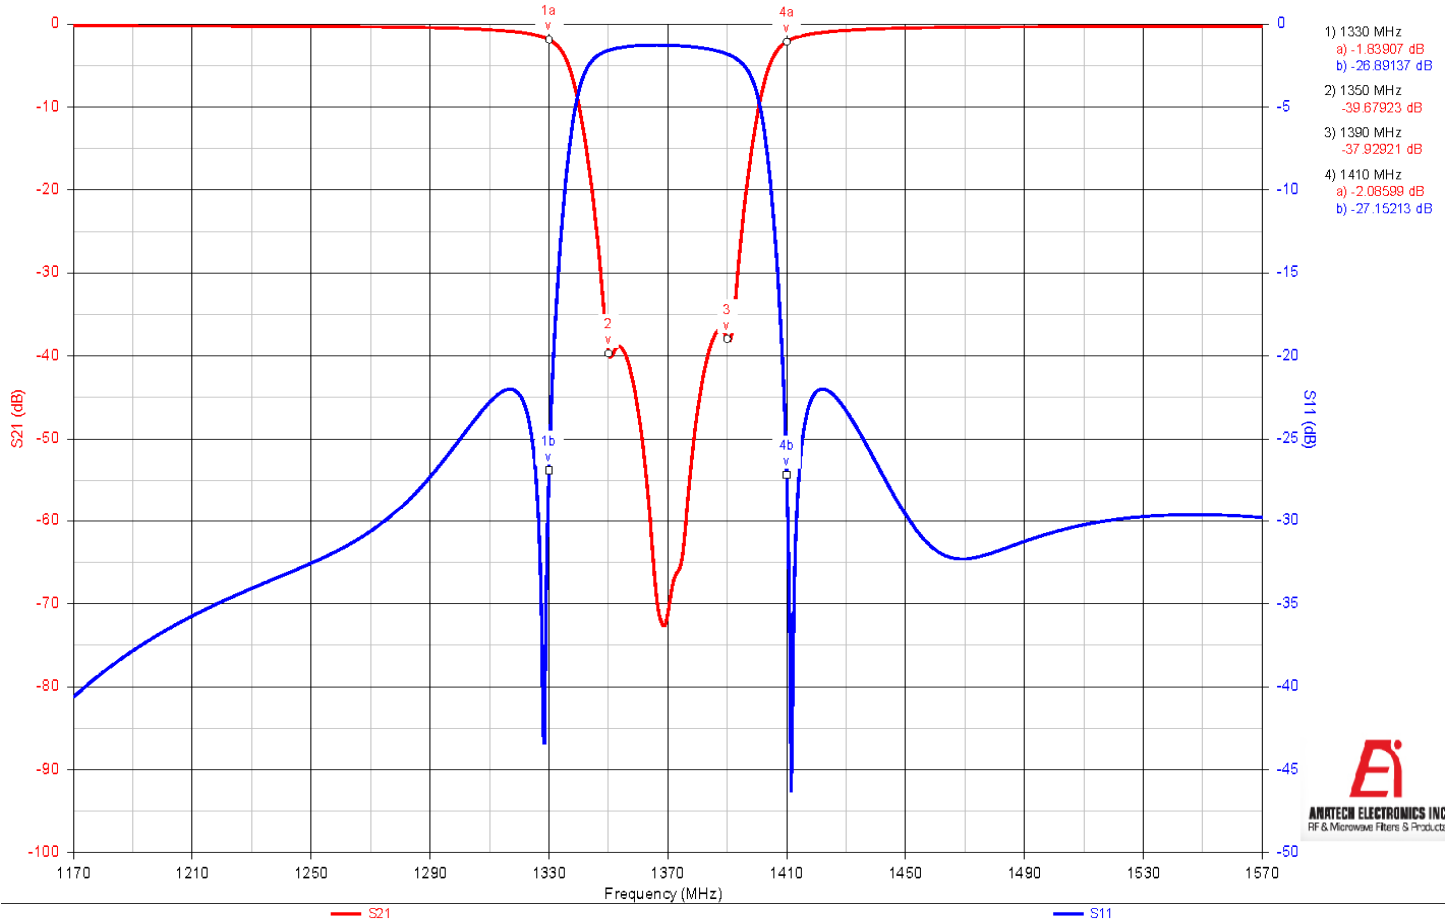

Note: This is a simulation plot. Actual results may differ once the product is implemented.