


May.1.2023 Copyright 2023 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

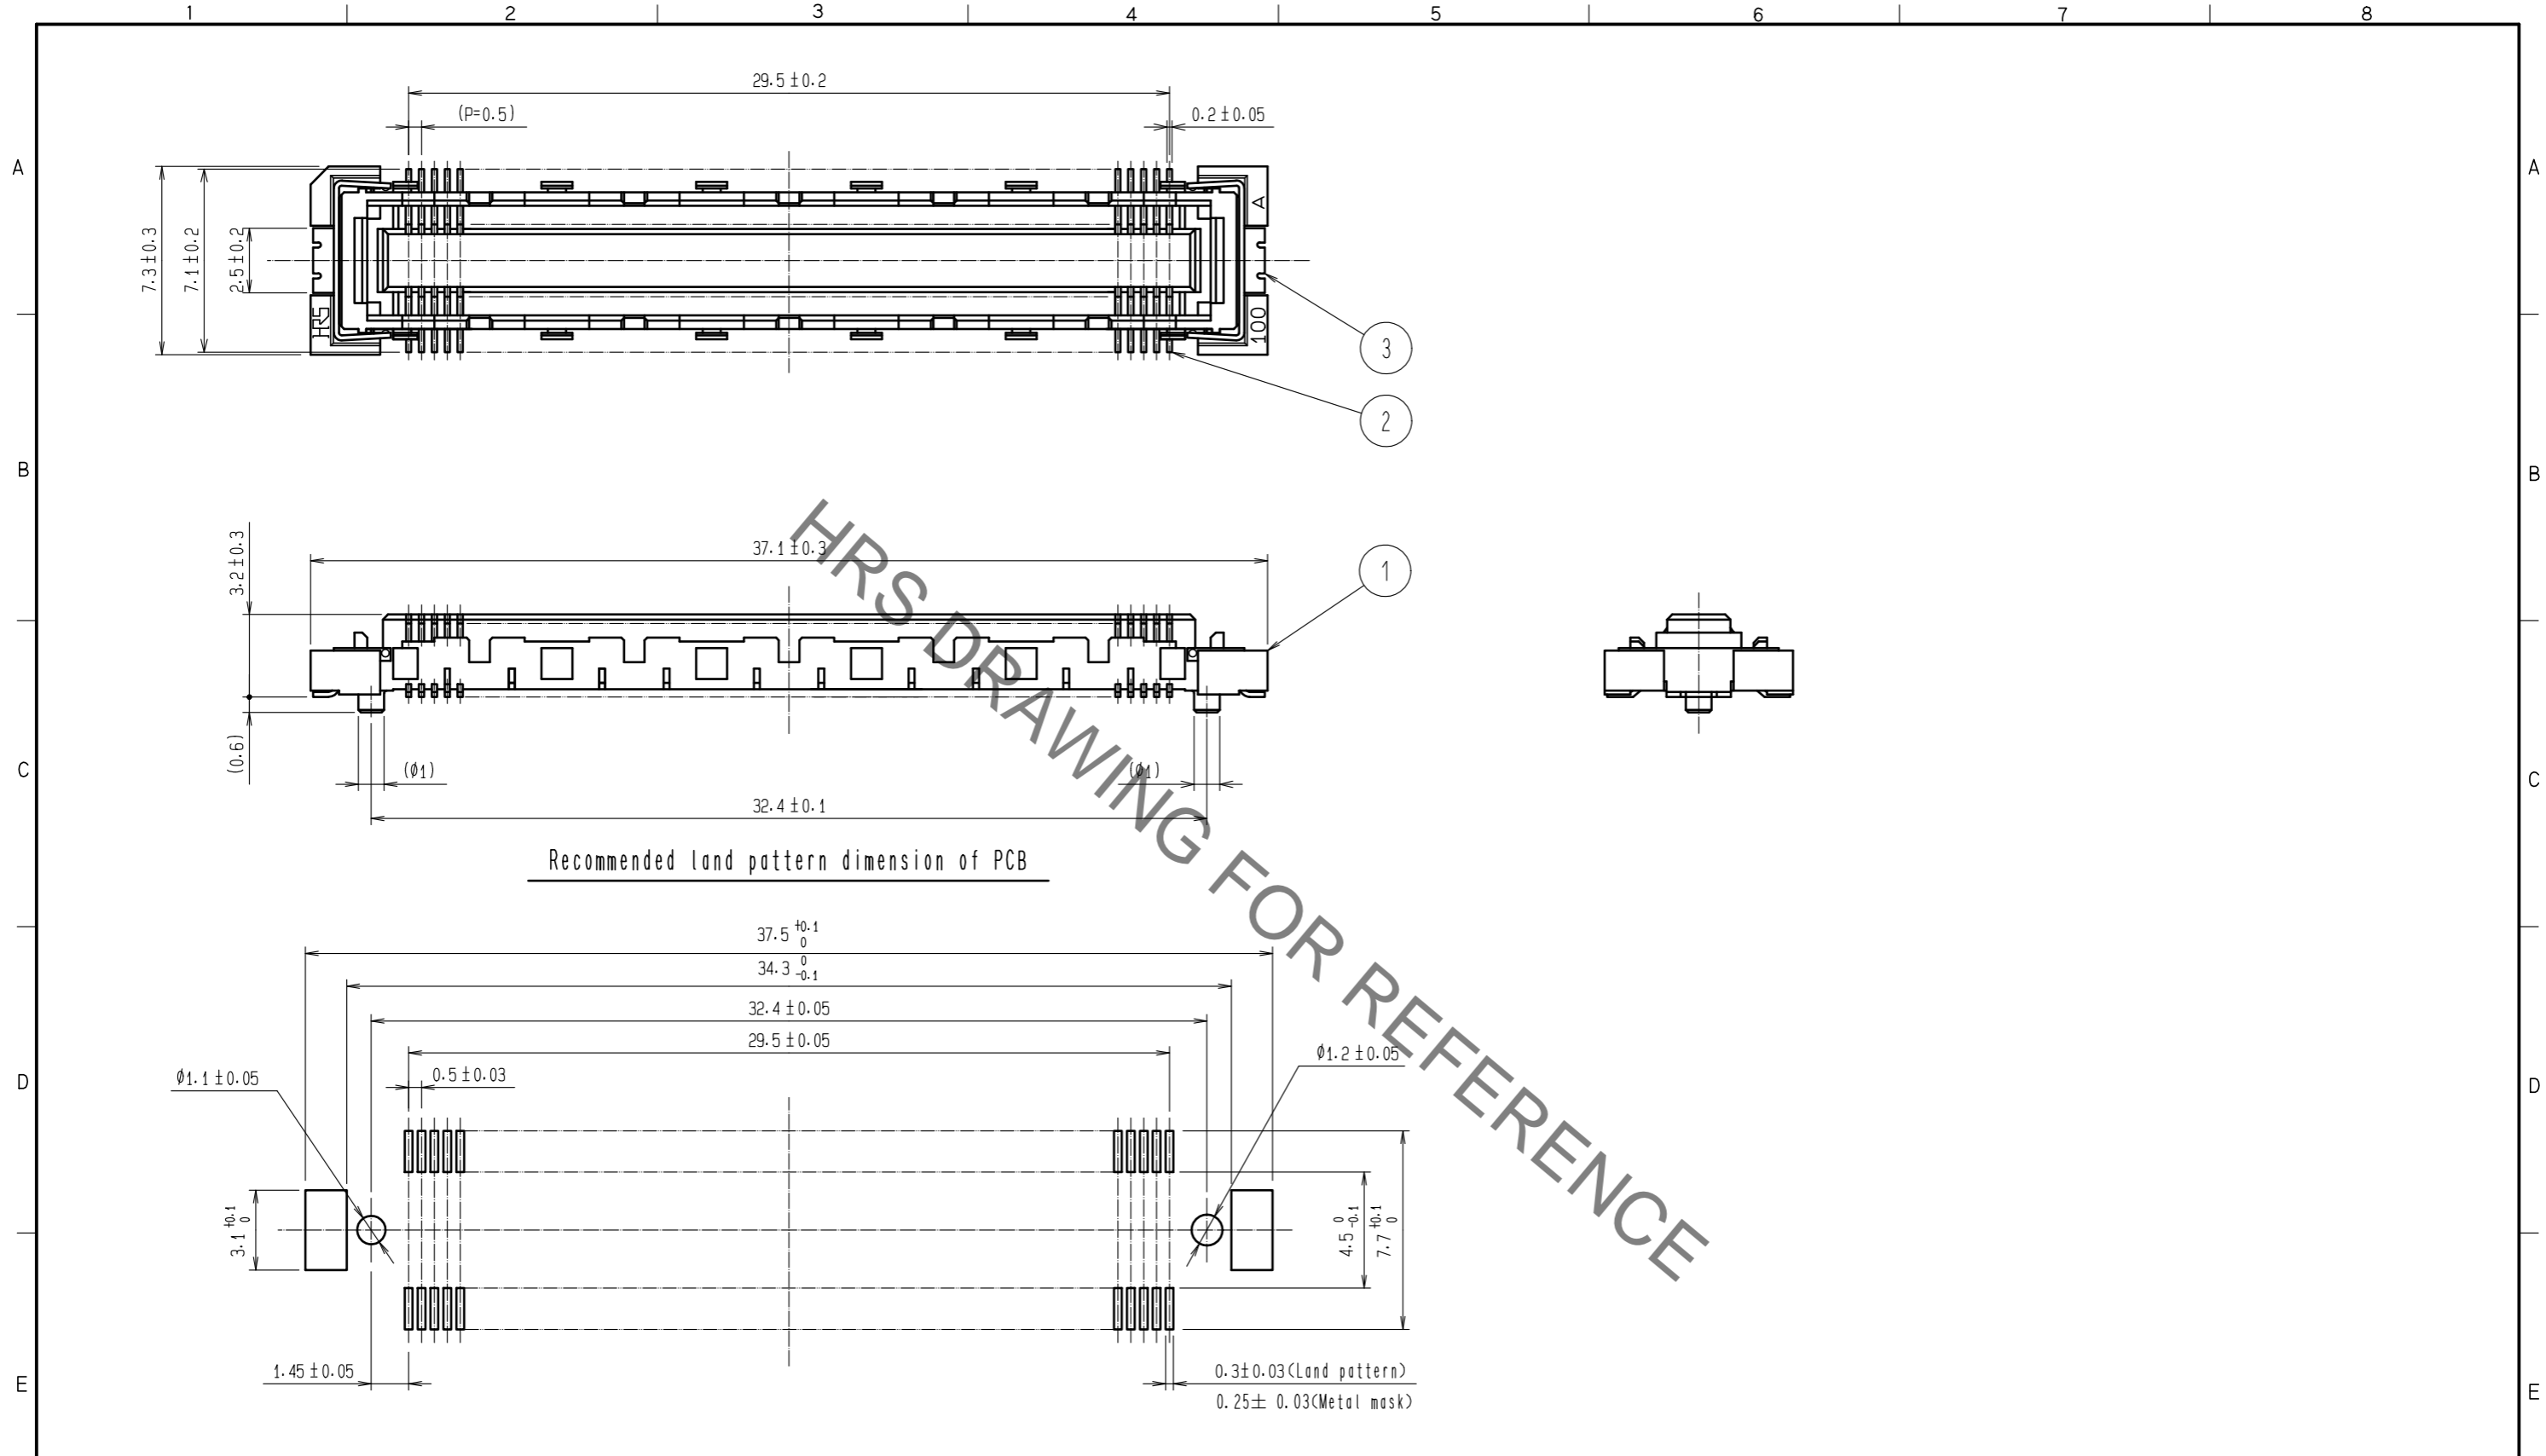


HRS DRAWING FOR REFERENCE

- Notes
- 1 SMT lead - coplanarity : 0.1 max.
  - 2 This product has no polarity to pattern for mounting.
  - 3 Emboss carrier tape package is applied on this product. Please refer to the sheet 2/2 for the details.

| 2                                    | Phosphor blonze | Contact area : Gold 0.1 $\mu$ m min  | 5        | Polyester                | (Top cover tape)      |
|--------------------------------------|-----------------|--------------------------------------|----------|--------------------------|-----------------------|
|                                      |                 | Lead : Gold 0.05 $\mu$ m min         | 4        | Polyethylene             | (Emboss carrier tape) |
|                                      |                 | Under plating : Nickel 1 $\mu$ m min | 3        | Phosphor blonze          | Tin - plating         |
| 1                                    | LCP             | Beige UL94V-0                        |          |                          |                       |
| NO.                                  | MATERIAL        | FINISH . REMARKS                     | NO.      | MATERIAL                 | FINISH . REMARKS      |
| UNITS                                |                 | SCALE                                | COUNT    | DESCRIPTION OF REVISIONS |                       |
| mm                                   |                 | 4 : 1                                | 1        | DIS-F-00011032           |                       |
| APPROVED : KJ. KATAYOSE              |                 |                                      | 20050105 | DESIGNED                 | MT. ITANO             |
| CHECKED : HS. OKAWA                  |                 |                                      | 20050105 | CHECKED                  | HT. YAMAGUCHI         |
| DESIGNED : KT. DOI                   |                 |                                      | 20050105 | DATE                     | 20211007              |
| DRAWN : KT. DOI                      |                 |                                      | 20050105 | DRAWING NO.              | EDC3-151985-01        |
| <b>HRS</b> HIROSE ELECTRIC CO., LTD. |                 |                                      |          | PART NO.                 | FX10A-120S-SV(21)     |
|                                      |                 |                                      |          | CODE NO.                 | CL0570-0242-1-21      |

May.1.2023 Copyright 2023 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

Drawing for packing (2:1)

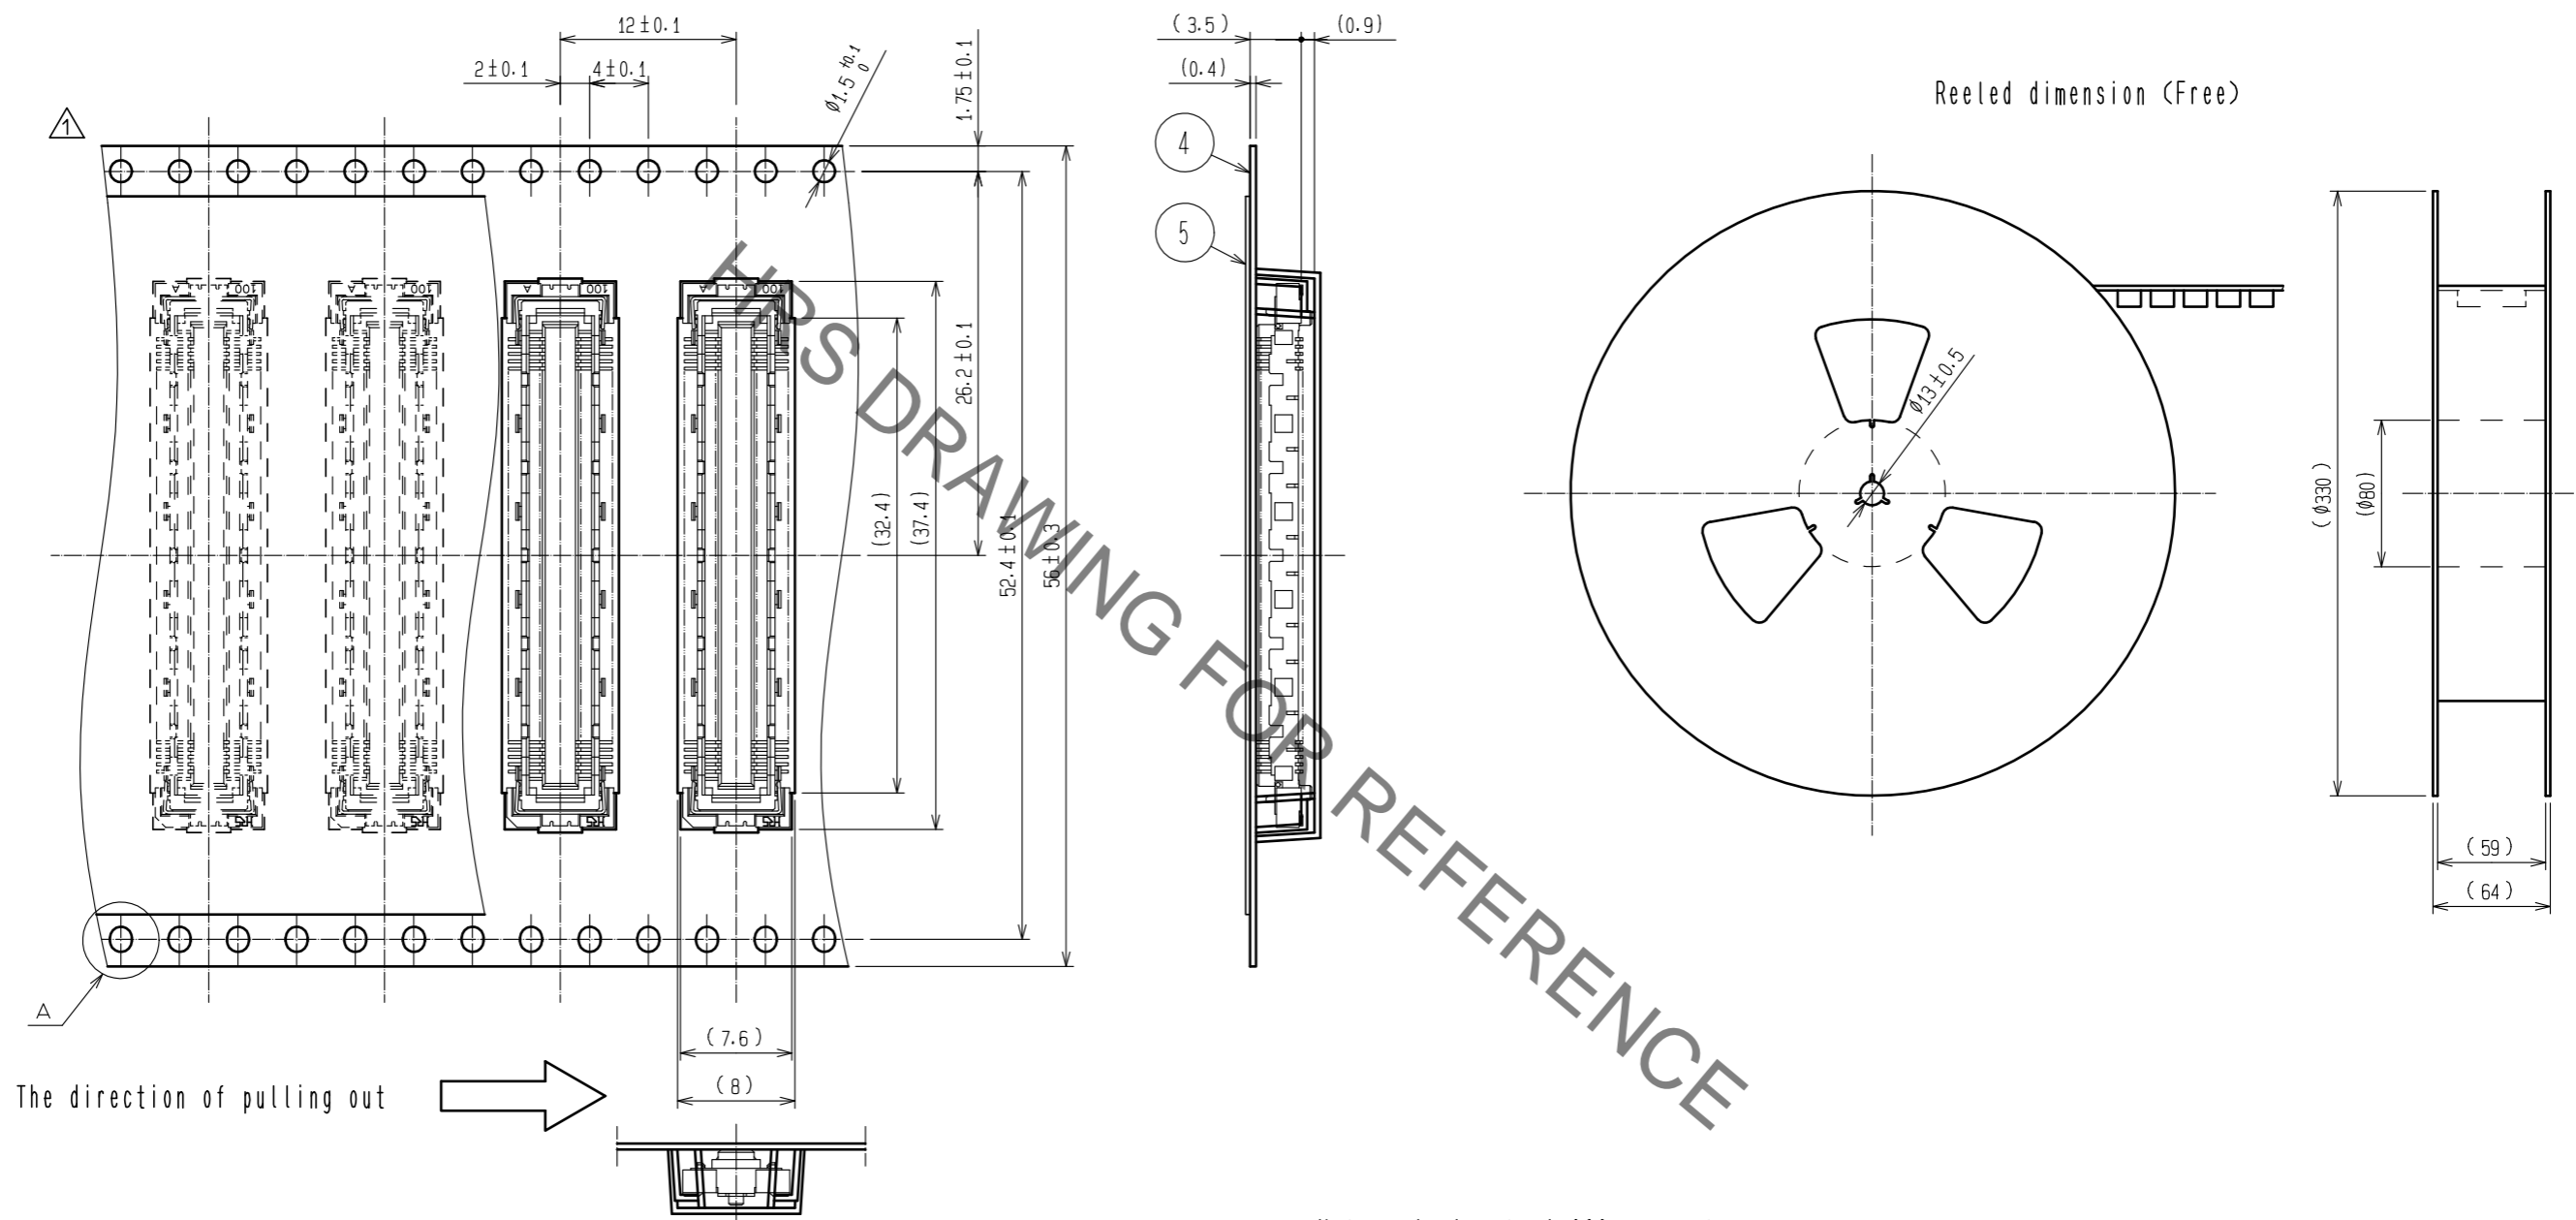

- Notes
- 4 1 reel : 1,000 connectors.
  - 5 Minimum 10 compartments from both reel ends remain empty.
  - 6 This product has no polarity to tape and reel packaging.
  - 7 The dimensions in parentheses are for reference.

|            |             |                   |
|------------|-------------|-------------------|
| <b>HRS</b> | DRAWING NO. | EDC3-151985-01    |
|            | PART NO.    | FX10A-120S-SV(21) |
|            | CODE NO.    | CL0570-0242-1-21  |
|            |             | 2/2               |